
# **1986711-5** • ACTIVE

### Buchanan

TE Internal #: 1986711-5 PCB Terminal Blocks, Header, Wire-to-Board, 5 Position, .197 in [5 mm] Centerline, 2 Row, 90° Wire Entry Angle, 30 – 12 AWG Wire Size

#### View on TE.com >

Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

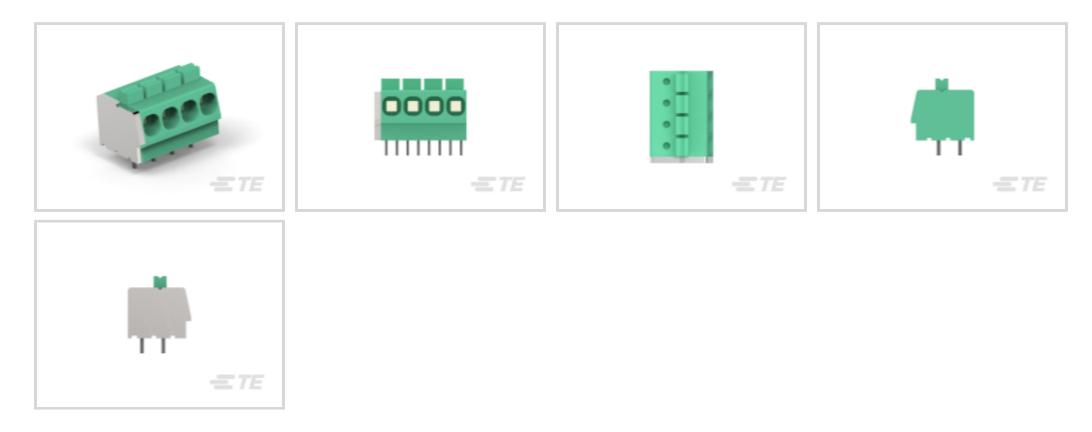

Terminal Block Connector Type: Header

Connector System: Wire-to-Board

Number of Positions: 5

Centerline (Pitch): 5 mm [.197 in ]

Number of Rows: 2

## Features



### Product Type Features

| Wire Protection                   | With                  |
|-----------------------------------|-----------------------|
| Terminal Block Connector Type     | Header                |
| Connector System                  | Wire-to-Board         |
| Connector & Contact Terminates To | Printed Circuit Board |
| Configuration Features            |                       |
| Wire Entry Location               | Side                  |
| Stacking Configuration            | Side Stackable        |
| Number of Positions               | 5                     |
| Number of Rows                    | 2                     |
| Wire Entry Angle                  | 90°                   |
| Electrical Characteristics        |                       |
| Operating Voltage                 | 300 VAC               |
| Body Features                     |                       |
| Lever Color                       | White                 |

**C** For support call+1 800 522 6752

## 1986711-5

PCB Terminal Blocks, Header, Wire-to-Board, 5 Position, .197 in [5 mm] Centerline, 2 Row, 90° Wire Entry Angle, 30 – 12 AWG Wire Size



| Primary Product Color                       | Green                 |
|---------------------------------------------|-----------------------|
| Product Orientation                         | Vertical              |
| Contact Features                            |                       |
| Contact Mating Area Length                  | 3.5 mm[.138 in]       |
| Contact Mating Area Plating Material        | Tin                   |
| Contact Base Material                       | Copper Alloy          |
| Contact Current Rating (Max)                | 16 A                  |
| Termination Features                        |                       |
| Termination Post & Tail Length              | 3.5 mm[.138 in]       |
| Termination Method to Printed Circuit Board | Through Hole - Solder |
| Termination Method to Wire & Cable          | Push-in               |
| Mechanical Attachment                       |                       |
| Connector Mounting Type                     | Board Mount           |
| Housing Features                            |                       |
| Housing Material                            | Polyamide             |
| Centerline (Pitch)                          | 5 mm[.197 in]         |

#### Dimensions

| Wire Size                                                                                                             | .05 – 3 mm²                          |
|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| Usage Conditions                                                                                                      |                                      |
| Operating Temperature Range                                                                                           | -40 - 110 °C[-40 - 230 °F]           |
| Operation/Application                                                                                                 |                                      |
| Circuit Application                                                                                                   | Power & Signal                       |
| Packaging Features                                                                                                    |                                      |
| Packaging Quantity                                                                                                    | 150                                  |
| Product Compliance<br>For compliance documentation, visit the product page on TE.com><br>EU RoHS Directive 2011/65/EU | Compliant with Exemptions            |
| EU ELV Directive 2000/53/EC                                                                                           | Compliant                            |
| China RoHS 2 Directive MIIT Order No 32, 2016                                                                         |                                      |
|                                                                                                                       | Restricted Materials Above Threshold |

PCB Terminal Blocks, Header, Wire-to-Board, 5 Position, .197 in [5 mm] Centerline, 2 Row, 90° Wire Entry Angle, 30 – 12 AWG Wire Size



Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content


Solder Process Capability

Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

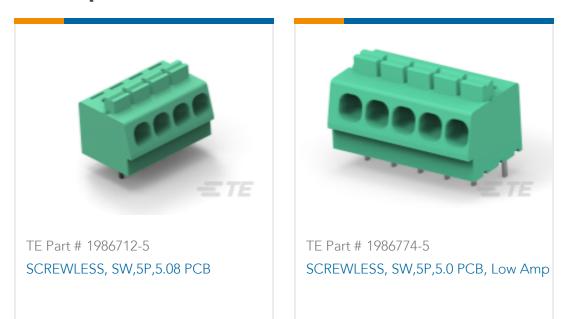

## Customers Also Bought

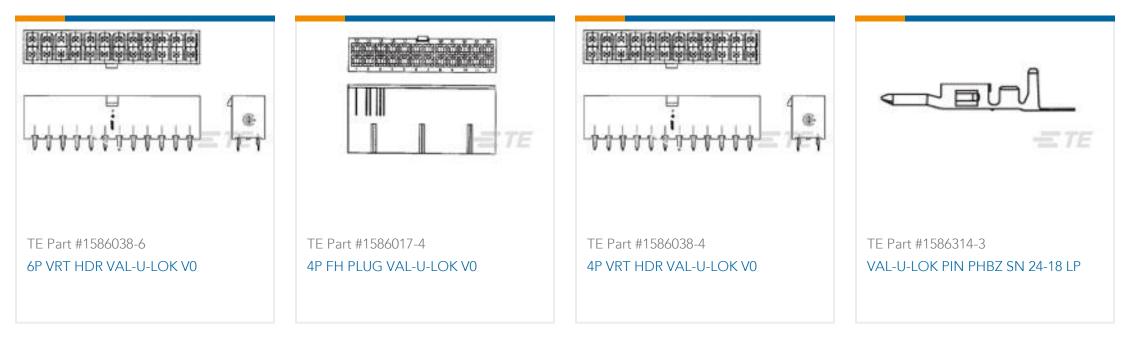

## 1986711-5

PCB Terminal Blocks, Header, Wire-to-Board, 5 Position, .197 in [5 mm] Centerline, 2 Row, 90° Wire Entry Angle, 30 – 12 AWG Wire Size







## Documents

Product Drawings SCREWLESS, SW,5P,5.0 PCB

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1986711-5\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1986711-5\_C.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1986711-5\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Agency Approvals VDE Certificate

English