

### Features :

- 4 x 2 x 1.34 Inches Form Factor
- 150 Watts with Forced Air Cooling & 110 Watts Convection Cooling
- No Load Power < 0.5 W
- - 40°C to + 70°C Operating Temperature
- 12 V / 0.5 A Fan Output, Thermal Shut-Down Feature
- Efficiencies up to 93 %
- Class II Option Available
- Medical ( BF ) Safety Approvals
- Approved to Household, ITAV and Medical standards

### SPECIFICATIONS:

MODEL		OPS2x4-150-12	OPS2x4-150-15	OPS2x4-150-24	OPS2x4-150-48
OUTPUT	NOMINAL DC VOLTAGE	12 V	15 V	24 V	48 V
	RATED CURRENT ( CONVECTION )	9.17 A	7.34 A	4.59 A	2.30A
	RATED CURRENT ( FORCED AIR )	12.5 A	10 A	6.25 A	3.13 A
	RATED POWER ( CONVECTION )	110 W	110 W	110 W	110 W
	RATED POWER ( FORCED AIR )	150 W	150 W	150 W	150 W
	RIPPLE & NOISE ( max )	< 1 % of Vout	< 1 % of Vout	< 1 % of Vout	< 1 % of Vout
	VOLTAGE ADJ. RANGE	12 to 13 V	15 to 16.5 V	24 to 26 V	48 to 56 V
	VOLTAGE TOLERANCE	± 1 %			
	LINE REGULATION	± 0.5 %			
	LOAD REGULATION	± 1 %			
	TURN ON TIME	< 2 sec at full load			
	HOLD UP TIME	> 20 msec at convection load & > 10 msec at full load for nominal Vout			
	RISE TIME	< 100 msec			
	FAN OUTPUT	A 12 V, 0.5 A output is available on a 2 pin connector header			
TRANSIENT RESPONSE	Max excursion 5 % for step load change from 50 % to 100 % at 0.1 A / μsec slew rate, 50 % duty cycle, 50 / 60 Hz. Recovery time < 5 msec				
INPUT	VOLTAGE RANGE *	90 - 264 VAC / 127 - 370 VDC <b>Note:</b> 90 - 305 VAC operation available on demand.			
	FREQUENCY RANGE	47 - 63 Hz			
	EFFICIENCY @ 230V AC	Up to 91 %	Up to 91 %	Up to 93 %	Up to 93 %
	AC CURRENT	1.6 A @ 115 VAC; 0.8 A @ 230 VAC			
	POWER FACTOR	> 0.93 at Full Load over entire input AC voltage range			
	INRUSH CURRENT	< 60 Amps; Measured at 264 VAC, 25°C Ambient, Cold start			
	LEAKAGE CURRENT	< 300 uA; 264 VAC input			
	TOUCH CURRENT	< 100 uA; 264 VAC input			
	NO LOAD POWER CONSUMPTION	< 0.5 W; 115 VAC input			
PROTECTION	OVERLOAD	110 % to 140 % of rated output current; Hiccup mode; Autorecovery type.			
	OVERVOLTAGE	14.5 VDC ± 1 VDC	19 VDC ± 1 VDC	29 VDC ± 1 VDC	58 VDC ± 2 VDC
	OUTPUT SHORT CIRCUIT	Latched type; Input AC power to be recycled to recover the power supply			
	OVER TEMPERATURE	Hiccup mode when output is shorted; Autorecovery type.			
ENVIRONMENT	OPERATING TEMP	Power supply shuts down when the temperature of PCB below main transformer reaches typically 120°C; Turns on only after the temperature falls below 90°C typically and AC power is recycled thereafter.			
	STORAGE TEMP	- 40°C to + 70°C; De-rate linearly above 50°C from 100 % load at 50°C to 50 % load at 70°C. <b>Note:</b> Only start up guaranteed at - 40°C with specification deterioration.			
	COOLING	- 40°C to + 85°C			
	HUMIDITY	Natural convection cooled or Forced Air cooled ( minimum 13 CFM ) as per power requirements.			
	ALTITUDE	5 to 95 % RH, Non condensing			
	VIBRATION	2000 m			
		Component: 10 ~ 500 Hz, 2 G 10 min. / 1 cycle, Period for 60 min. each along X, Y, Z axes			

**Note:** \*Although power supply will work for the specified DC input voltage range, UL approval is only for the specified AC input voltage range.

MODEL		OPS2x4-150-12	OPS2x4-150-15	OPS2x4-150-24	OPS2x4-150-48
DIELECTRIC WITHSTAND	TEST VOLTAGE	I/P to Earth: 1500 VAC, I/P to O/P: 4000 VAC, O/P to Earth: 1500 VAC			
	DIMENSION	Overall: 4" x 2" x 1.34" ( L x W x H ); Height above PCB: 1.18"			
MECHANICAL	WEIGHT	< 180 gms			
	MOUNTING	Open Frame			


Means of Protection		Category
Primary to Secondary	2 x MOPP ( Means of Patient Protection )	IEC 60601-1 Ed 3
Primary to Earth	1 x MOPP ( Means of Patient Protection )	
Secondary to Earth	1 x MOPP ( Means of Patient Protection )	

### Connectors details


Ref Des	Description	Type	Pin number	Function
J1	Input AC connector	Tyco: 640445-3; Mates with 647402-3; Pin: 3-647409-1	1	AC Neutral
			2	Not connected
			3	AC Line
J2	Output DC connector	Tyco: 640445-4; Mates with 647402-4; Pin: 3-647409-1	1, 2	V1 negative
			3, 4	V1 positive
J3	Fan connector	Molex: 22-04-1021; Mates with 22-01-1022; Pin: 08-50-0113	1	V2 positive
			2	V2 negative
-	Earth*	Molex: 19705-4301; Mates with 19003-0001	-	Earth

Note: \* All the mounting holes marked with Earth symbol must be Earthed.

### De-rating curve

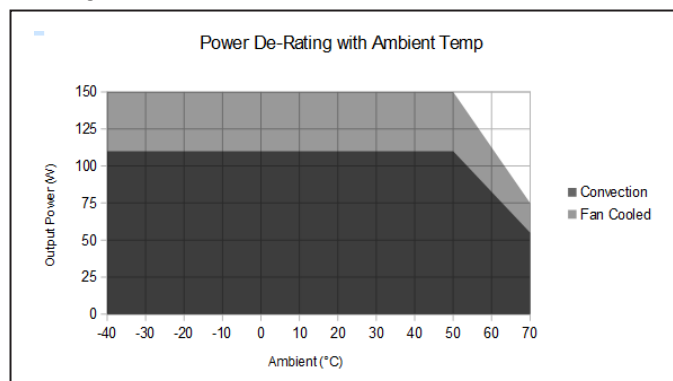

### Mechanical dimensions

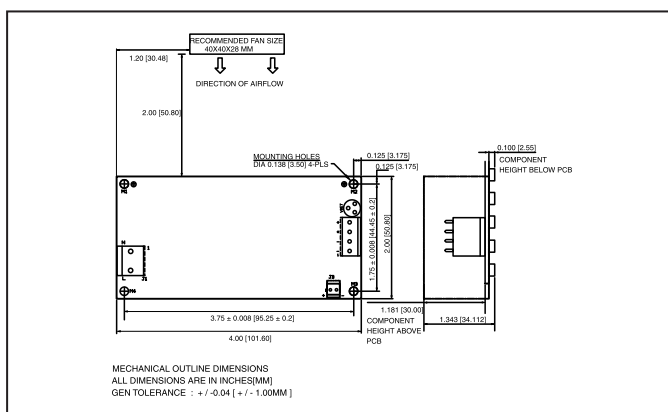

#### Note:

1. This open frame power supply should preferably be mounted horizontally on 4 metal stand-offs having diameter not more than 6 mm and height not less than 7 mm.
2. Screws used to fix PCB on stand-offs should not have head diameter more than 6 mm.
3. Washer used should not have diameter more than 6 mm.

## Compliance

Applicable EMI / EMC Standards		
Category	Reference Standards	Testing Level
Conducted Emission	CISPR32	CLASS B
Radiated Emission	CISPR32	CLASS A
Electrostatic Discharge	IEC 61000-4-2	Level 4, Criteria A Level 3, Criteria A
Radiated Susceptibility	IEC 61000-4-3	Level 3, Criteria B
Electrical Fast Transient / Burst	IEC 61000-4-4	Level 3, Criteria A
Surge	IEC 61000-4-5	Level 3, Criteria A
Conducted Susceptibility	IEC 61000-4-6	Level 3, Criteria B
Power Frequency Magnetic Field	IEC 61000-4-8	Level 4, Criteria A
Voltage Dips & Interruption	IEC 61000-4-11	Criteria A & B
Safety	Designed to Meet IEC / EN / UL 62368-1; IEC / EN 60601-1; IEC / EN 61558	

## Ordering information

Product Code	Description	Certification
<b>OPS2x4-150-12-A-1-CU</b>	Open Frame Power Supply with 4 x 2 x 1.34" Form factor, 12 V / 12.5 A, 150 Watts with Forced Air Cooling & 12 V / 9.17 A, 110 Watts Convection Cooling	
<b>OPS2x4-150-15-A-1-CU</b>	Open Frame Power Supply with 4 x 2 x 1.34" Form factor, 15 V / 10 A, 150 Watts with Forced Air Cooling & 15 V / 7.34 A, 110 Watts Convection Cooling	
<b>OPS2x4-150-24-A-1-CU</b>	Open Frame Power Supply with 4 x 2 x 1.34" Form factor, 24 V / 6.25 A, 150 Watts with Forced Air Cooling & 24 V / 4.59 A, 110 Watts Convection Cooling	
<b>OPS2x4-150-48-A-1-CU</b>	Open Frame Power Supply with 4 x 2 x 1.34" Form factor, 48 V / 3.13 A, 150 Watts with Forced Air Cooling & 48 V / 2.30 A, 110 Watts Convection Cooling	