



# **Technical Data Sheet**

## **PEWAN090-10SM**

#### **Features**

- 8.2 GHz to 12.4 GHz
- WR-90 Waveguide Band

- 10 dBi Nominal Gain
- SMA Male Connector

### **Applications**

- Antenna Measurements
- Wireless Communication
- Laboratory Use

- Microwave Radio Systems
- · Radome Testing
- Automotive Antenna Test
- Solutions
- · Radar Cross Section
- Satellite Antenna Testing

## **Description**

The PEWAN090-10SM standard gain horn antenna (also known as waveguide horn) from Pasternack is part of our comprehensive selection of waveguide antennas. This standard gain horn is mated with a WR-90 to SMA Male waveguide to coaxial adapter and operates from 8.2 GHz to 12.4 GHz.

Our PEWAN090-10SM standard gain horn antenna has a nominal gain of 10 dBi with a Horizontal and Vertical HPBW (Half Power Beam Width) of 52.1 dB and 51.6 dB respectively. Pasternack's SMA Male to WR-90 standard gain horns are available in 10, 15 and 20 dBi models with pyramidal shape and connectorized input.

Waveguide antennas, such as the PEWAN090-10SM are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our WR-90 waveguide antennas with SMA Male interface is part of over 40,000 RF, microwave and millimeter wave components from Pasternack available worldwide and Ship same day.

#### Configuration

Design Coaxial Interface WR-90 Standard Gain Horn

SMA Male

#### **Electrical Specifications**

| Description                      | Minimum | Typical | Maximum | Units   |
|----------------------------------|---------|---------|---------|---------|
| Frequency Range                  | 8.2     |         | 12.4    | GHz     |
| Waveguide Standard Gain Horn     |         |         |         |         |
| Gain                             |         | 10      |         | dBi     |
| Horizontal Half Power Beam Width |         | 52.1    |         | Degrees |
| Vertical Half Power Beam Width   |         | 51.6    |         | Degrees |
| Vaveguide to Coaxial Adapter     |         |         |         |         |
| Input VSWR                       |         |         | 1.25:1  |         |
|                                  |         |         |         |         |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-90 Standard Gain Horn with 10 dBi gain, SMA Male connector PEWAN090-10SM

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





# **Technical Data Sheet**

## **PEWAN090-10SM**

**Mechanical Specifications** 

Size

 Length
 3.351 in [85.12 mm]

 Width
 1.63 in [41.4 mm]

 Height
 1.63 in [41.4 mm]

 Weight
 0.1 lbs [45.36 g]

**RF Connector** 

Type SMA Male

**Waveguide Interface** 

Waveguide Size WR-90

**Environmental Specifications** 

Compliance Certifications (see product page for current document)

**Plotted and Other Data** 

Notes:






# **Technical Data Sheet**

# **PEWAN090-10SM**



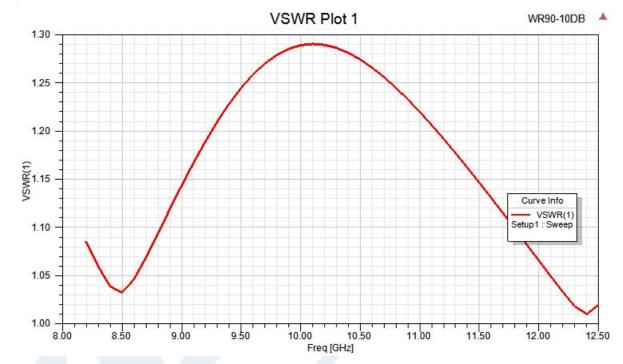






# **Technical Data Sheet**

# **PEWAN090-10SM**

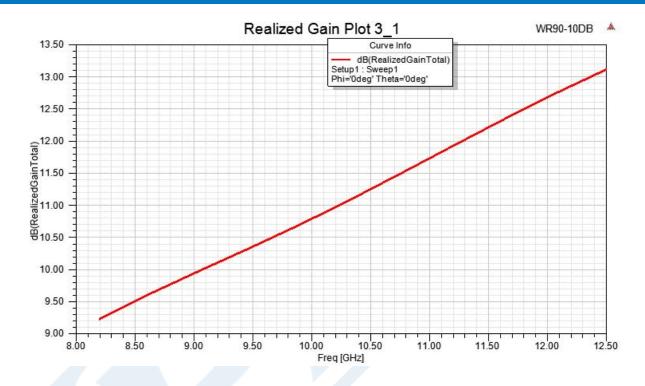






# **Technical Data Sheet**

# **PEWAN090-10SM**

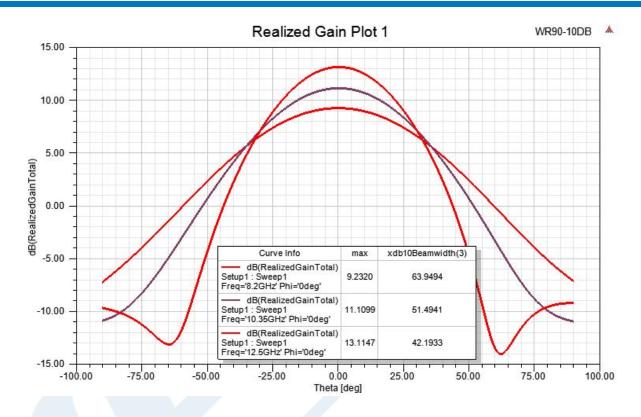






## **Technical Data Sheet**

## **PEWAN090-10SM**

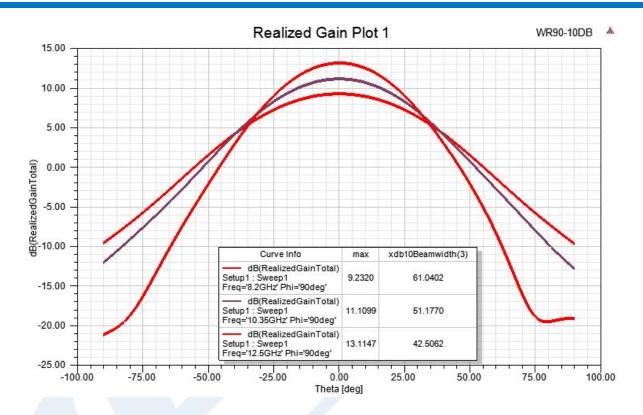

WR-90 Standard Gain Horn with 10 dBi gain, SMA Male connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-90 Standard Gain Horn with 10 dBi gain, SMA Male connector PEWAN090-10SM

#### URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PEWAN090-10SM CAD Drawing**WR-90 Standard Gain Horn with 10 dBi gain, SMA Male connector

