

Small Signal Product

500mW High Speed SMD Switching Diode

FEATURES

- Designed for mounting on small surface
- Extremely thin/leadless package
- High mounting capability, strong surge with stand, high reliability
- Pb free and RoHS compliant
- Halogen free



0805 (Ceramics)



MECHANICAL DATA

- Case: 0805 (Ceramics)
- High temperature soldering guaranteed: 260°C/10s
- Polarity: Indicated by white cathode band
- Weight: 0.006g (approximately)

| MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted) | | | |
|--|-----------------------------------|--------------|------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Power dissipation | P _D | 500 | mW |
| Non-repetitive peak reverse voltage | V _{RSM} | 100 | V |
| Repetitive peak reverse voltage | V _{RRM} | 75 | V |
| Repetitive peak forward current | I _{FRM} | 300 | mA |
| Mean forward current | I _O | 150 | mA |
| Non-repetitive peak forward surge current Tp = 1s square waveform Tp = 8.3ms single half sine waveform | I _{FSM} | 0.5 2.0 | A |
| Thermal resistance form junction ambient (Note 1) | R _{θJA} | 375 | °C/W |
| Junction and storage temperature range | T _J , T _{STG} | - 55 to +175 | °C |

| PARAMETER | SYMBOL | MIN | MAX | UNIT |
|---|-------------------|-----|-----|------|
| Reverse breakdown voltage (Note 2) | V _(BR) | - | 75 | V |
| Forward voltage I _F =100mA | V _F | - | 1 | V |
| Reverse leakage current V _R =20V V _R =75V | I _R | - | 25 | nA |
| | | - | 5 | μA |
| Junction capacitance V _R =0, f=1.0MHz | C _J | | 4 | pF |
| Reverse recovery time (Note 3) | t _{rr} | | 4 | ns |

Note: 1 Valid provided that electrodes are kept at ambient temperature

Note: 2 Test Condition: I_R=100μA

Note: 3 Test Condition: I_F=10mA, I_R=1mA, R_L=100Ω

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig. 1 Typical Forward Characteristics

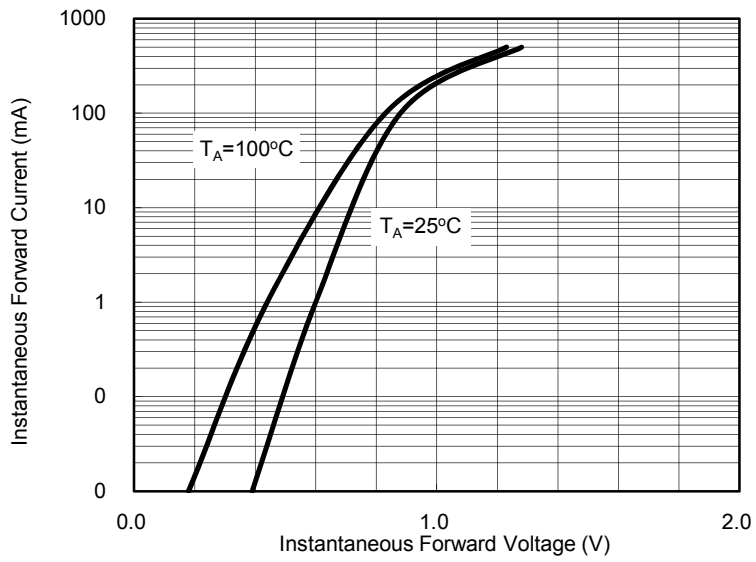


Fig. 2 Reverse Current VS. Reverse Voltage

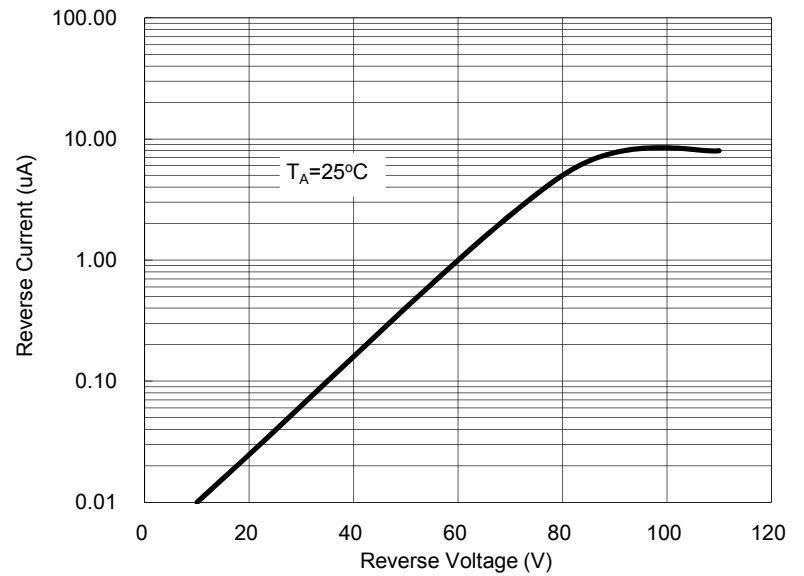


Fig. 3 Admissible Power Dissipation Curve

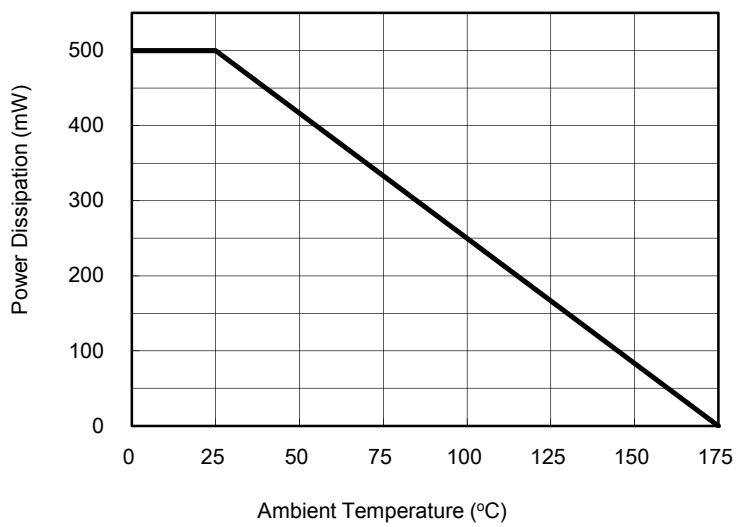


Fig. 4 Typical Junction Capacitance


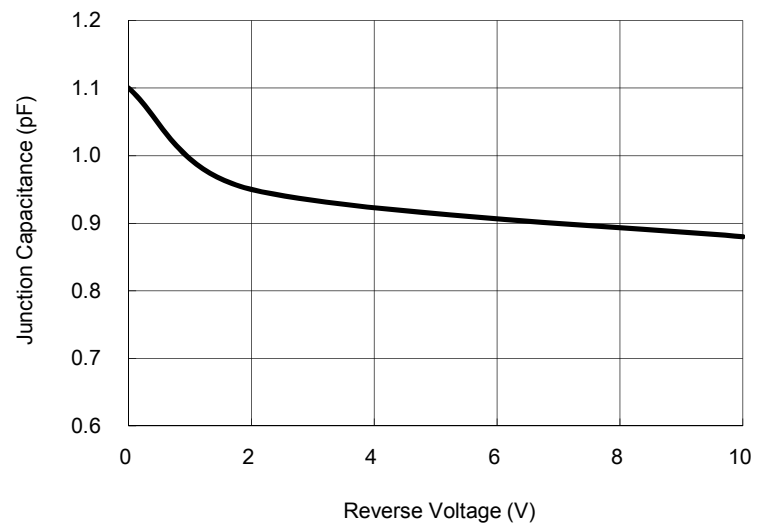


Fig. 5 Forward Resistance VS. Forward Current

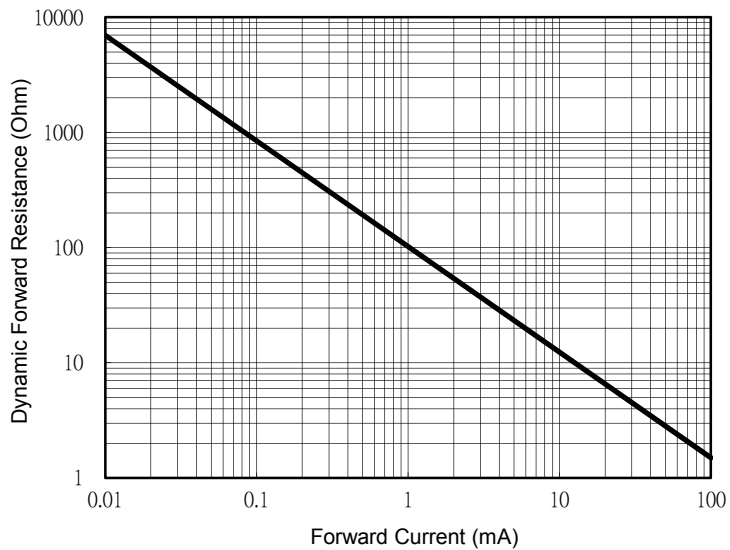


Small Signal Product

| ORDERING INFORMATION | | | | | |
|----------------------|-----------------|--------------|---------------------|--------------------|----------------|
| PART NO. | PART NO. SUFFIX | PACKING CODE | PACKING CODE SUFFIX | PACKAGE | PACKING |
| TS4148 RYG | -xx (Note1) | RY | G | 0805 (Ceramics) | 5K / 7" Reel |
| | | RB | | | 10K / 13" Reel |

Note 1: Part No. Suffix „-xx “ would be used for special requirement

| EXAMPLE | | | | | |
|--------------------|----------|-----------------|--------------|---------------------|---|
| PREFERRED PART NO. | PART NO. | PART NO. SUFFIX | PACKING CODE | PACKING CODE SUFFIX | DESCRIPTION |
| TS4148 RYG | TS4148 | | RY | G | Multiple manufacture source Green compound |
| TS4148-C0 RYG | TS4148 | -C0 | RY | G | Defined manufacture source Green compound |

PACKAGE OUTLINE DIMENSIONS
0805 (Ceramics)

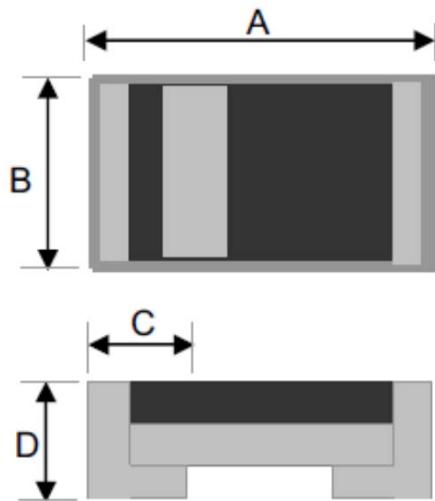

| DIM. | Unit (mm) | | Unit (inch) | |
|------|-----------|------|-------------|-------|
| | Min | Max | Min | Max |
| A | 1.80 | 2.20 | 0.071 | 0.087 |
| B | 1.05 | 1.45 | 0.041 | 0.057 |
| C | 0.25 | 0.65 | 0.010 | 0.026 |
| D | 0.75 | 0.95 | 0.030 | 0.037 |

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.