


SURFACE MOUNT FAST RECOVERY RECTIFIER

Features

- ◆ Glass passivated device
- ◆ Ideal for surface mounted applications
- ◆ Low reverse leakage
- ◆ Metallurgically bonded construction
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC UOD-123FL molded plastic body
 Terminals: Solderable per MIL-STD-750, Method 2026A
 Polarity: Polarity symbol marking on body
 Mounting Position: Any
 Weight: 0.007 ounce, 0.02 grams

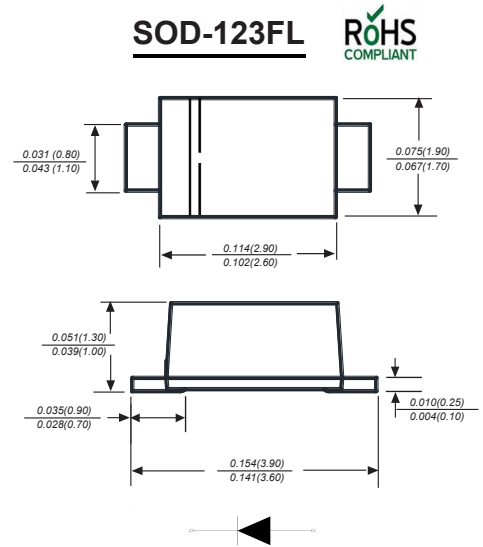

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| Parameter | SYMBOLS | RS2AW | RS2BW | RS2DW | RS2GW | RS2JW | RS2KW | RS2MW | UNITS |
|--------------------------------------------------------------------------------------------------|------------------------------------|-------------|-------|-------|-------|-------|-------|-------|-------|
| Marking Code | | 2F1 | 2F2 | 2F3 | 2F4 | 2F5 | 2F6 | 2F7 | |
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward rectified current at TL (see fig. 1) | I_{AV} | 2.0 | | | | | | | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 50 | | | | | | | A |
| Maximum instantaneous forward voltage at 2.0A | V_F | 1.3 | | | | | | | V |
| Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=125°C | I_R | 5 100 | | | | | | | mA |
| Typical junction capacitance (NOTE 1) | C_J | 40 | | | | | | | pF |
| Maximum Reverse Recovery Time | t_{rr} | 150 | | | 250 | | 500 | | ns |
| Typical thermal resistance (NOTE 2) | $R_{\theta JA}$ $R_{\theta JC}$ | 75 22 | | | | | | | °C/W |
| Operating junction temperature range | T_J | -55 to +150 | | | | | | | °C |
| Storage temperature range | T_{STG} | -55 to +150 | | | | | | | °C |

Note:

2. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.
3. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
4. P.C.B. mounted with 2.0x2.0" (5.0x5.0cm) copper pad areas

Typical Characteristics

Fig.1 Forward Current Derating Curve

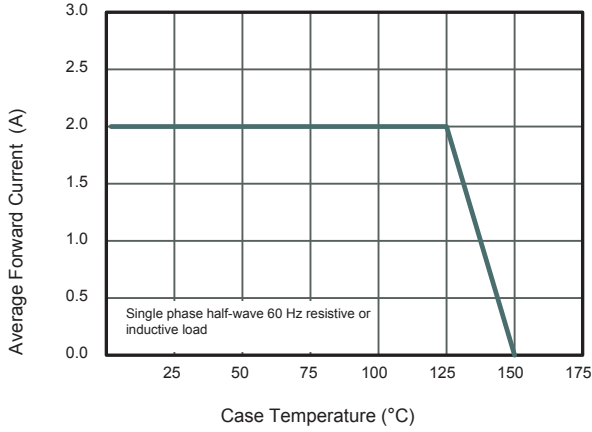


Fig.2 Typical Reverse Characteristics

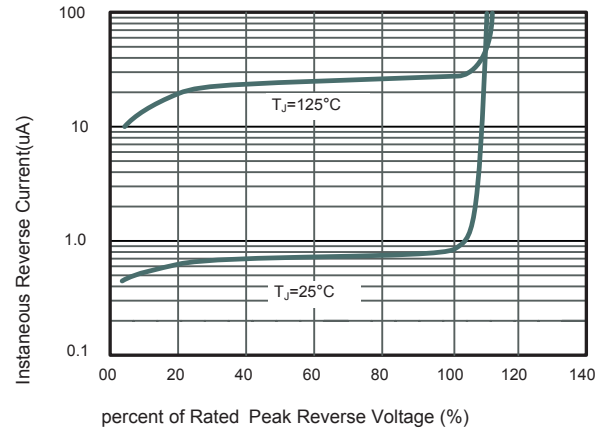


Fig.3 Typical Instantaneous Forward Characteristics

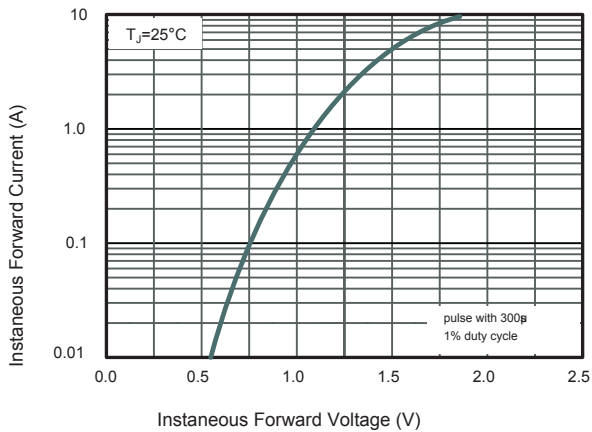


Fig.4 Typical Junction Capacitance



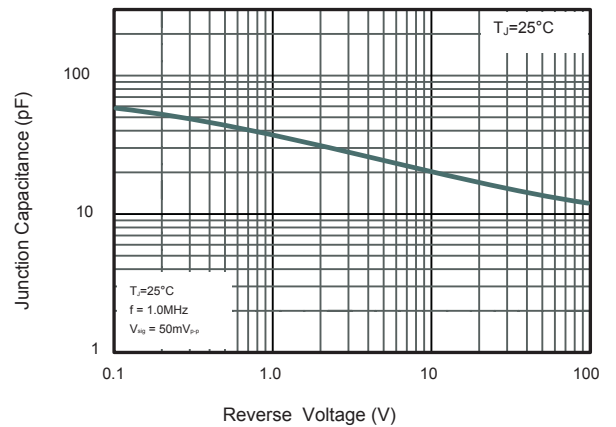


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

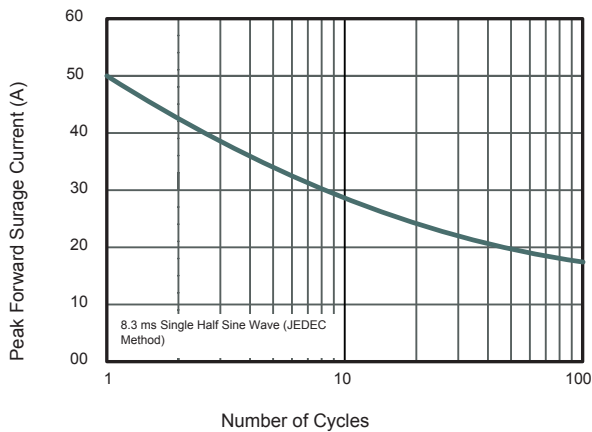

The curve above is for reference only.

Packing information

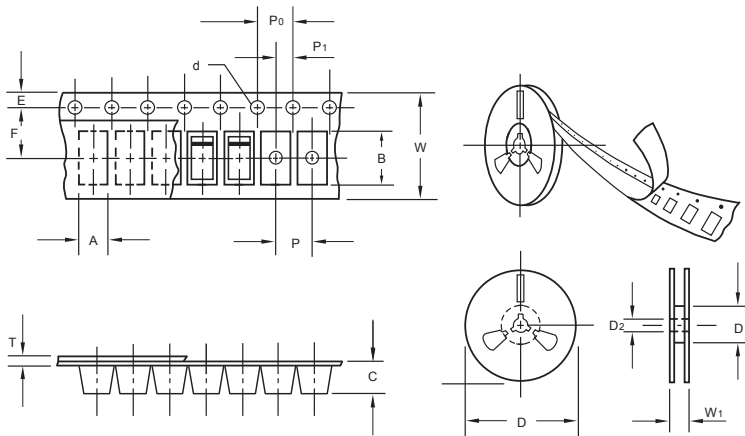

unit:mm


| Item | Symbol | Tolerance | SOD-123FL |
|--------------------------|--------|-----------|-----------|
| Carrier width | A | 0.1 | 2.1 |
| Carrier length | B | 0.1 | 4.0 |
| Carrier depth | C | 0.1 | 1.60 |
| Sprocket hole | d | 0.05 | 1.55 |
| 7" Reel outside diameter | D | 2.0 | 178.00 |
| 7" Reel inner diameter | D1 | min | 50.0 |
| Feed hole diameter | D2 | 0.5 | 13.00 |
| Sprocket hole position | E | 0.1 | 1.75 |
| Punch hole position | F | 0.1 | 3.50 |
| Punch hole pitch | P | 0.1 | 4.00 |
| Sprocket hole pitch | P0 | 0.1 | 4.00 |
| Embossment center | P1 | 0.1 | 2.00 |
| Overall tape thickness | T | 0.1 | 0.25 |
| Tape width | W | 0.3 | 8.15 |
| Reel width | W1 | 1.0 | 10.5 |

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

| PACKAGE | REEL SIZE | REEL (pcs) | COMPONENT SPACING (m/m) | BOX (pcs) | INNER BOX (m/m) | REEL DIA, (m/m) | CARTON SIZE (m/m) | CARTON (pcs) | APPROX. GROSS WEIGHT (kg) |
|-----------|-----------|------------|-------------------------|-----------|-----------------|-----------------|-------------------|--------------|---------------------------|
| SOD-123FL | 7" | 3,000 | 4.0 | 45,000 | 210*208*203 | 178 | 430*430*235 | 180,000 | 9.0 |

Suggested Pad Layout

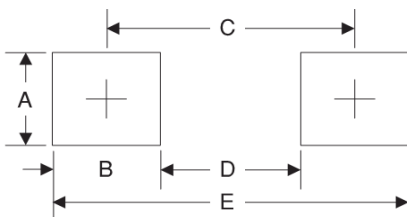

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A | 1.2 | 0.047 |
| B | 1.2 | 0.047 |
| C | 3.2 | 0.126 |
| D | 2 | 0.079 |
| E | 4.4 | 0.173 |