


## Part Numbering System

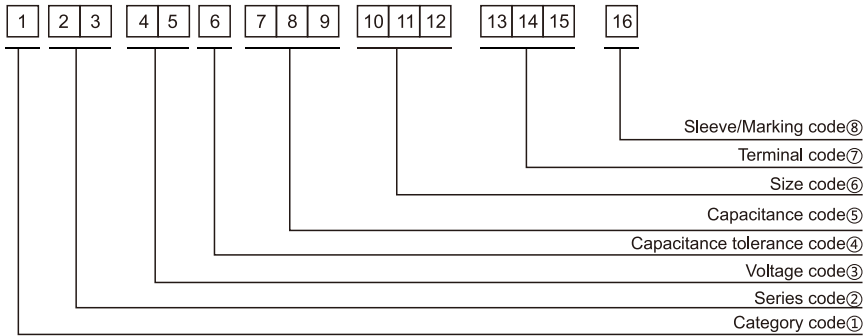

① Category code

Type	Code
	1
Electrolytic Capacitor	E
Conductive Polymer	S

② Series code

Series name	Code	
	2	3
WH	W	H
CD11GE	G	E
CD11GES	G	X
CD11GAS	G	W
CD11GHS	G	S
NR	N	R
PZ	P	Z

③ Voltage code

WV (V <sub>dc</sub> )	Code	
	4	5
2.5	0	E
3	0	D
4	0	G
6.3	0	J
6.8	0	C
7	0	Q
7.5	0	A
10	1	A
12	1	T
16	1	C
25	1	E
35	1	V
40	1	G
50	1	H
63	1	J
80	1	B
100	1	K
120	2	B
160	2	C
180	2	L
200	2	D
220	2	N
250	2	E
315	2	F
350	2	V
380	2	P
400	2	G
420	2	T
450	2	W
500	2	H
550	2	J
600	2	K

④ Capacitance tolerance code

Tol. (%)	Code
	6
-10~+10	K
-20~+20	M
-10~+30	Q
-10~+20	V
0~+20	A
-5~+20	C
-10~-20	B
-5~+5	D
0~+10	E
-5~-20	F
-15~+5	N

⑤ Capacitance code

Cap (μF)	Code		
	7	8	9
0.10	R	1	0
0.22	R	2	2
0.33	R	3	3
0.47	R	4	7
0.68	R	6	8
1	0	1	0
2.2	2	R	2
3.3	3	R	3
4.7	4	R	7
6.8	6	R	8
10	1	0	0
22	2	2	0
33	3	3	0
47	4	7	0
68	6	8	0
100	1	0	1
220	2	2	1
330	3	3	1
470	4	7	1
680	6	8	1
1000	1	0	2
2200	2	2	2
3300	3	3	2
4700	4	7	2
6800	6	8	2
10000	1	0	3
22000	2	2	3
33000	3	3	3
68000	6	8	3

⑥ Size code

ΦD (mm)	Code
4	C
5	D
6.3	E
8	F
10	G
11	H
12	J
12.5	W
13	K
14	X
16	L
18	M
19	Z
20	N
22	O
25	P
30	Q
35	R
40	Y
51.6	S
64.3	T
76.9	U
91	V
100	A

L (mm)	Code	
	11	12
5	0	5
7	0	7
11	1	1
12	1	2
16	1	6
20	2	0
25	2	5
30	3	0
35	3	5
40	4	0
46	4	6
50	5	0
60	6	0
80	8	0
100	A	0
115	B	5
120	C	0
130	D	0
140	E	0
160	G	0
200	K	0
220	M	0
236	N	6
250	P	0

⑦ Terminal code

Specification	Code	Size	
	13	14	15
Bulk packing	O	-	-
Taping (SMD Type)	D	0	0
Φ4~8 Taping F=5.0mm	P	5	0
Φ10~12.5 Taping F=5.0mm	B	5	0
Lead Cut L=3.5mm	C	3	5
Lead Cut L=11.0mm	C	B	0
Lead Forming & Cut L=4.5mm	F	-	-
Kink & Cut L=4.5mm	J	-	-
Snap-in type Terminal 4.0mm in length	K	-	-
Three Terminals	T	-	-
Ring clip mounting standard design	A	0	0
Ring clip mounting special design	S	-	-

⑧ Sleeve/Marking code

Sleeve/Marking	Code
	16
PVC	C
PET	T
Dark blue	B
Bright red	R
Sky-blue	S
Light blue	T
Pink	Z
Black	H
Purple-blue	V
Red	O

Lead Forming  
Taping Specifications

Fig.1 code: X



Fig.2 code: B



Fig.3 code: B



Fig.4 code: P



## Lead Forming

Specification Fig.1 & Fig.2 & Fig.3

Items	Symbol	Case size										Tolerance		
		4*5 4*7		5*5 5*7		5*11		6.3*5	6.3*7 6.3*9	6.3*11 6.3*12	8*5/7 8*9/11 8*11.5 8*12		8*16 8*20	10*9/12 10*12.5 10*13/16 10*20/25
Pin Code		X	B	X	B	X	B	B	B	B	B	B	B	
Lead wire diameter	Φd	0.45		0.45		0.5		0.45	0.5	0.5	0.45/0.5	0.6	0.6	±0.05
Pitch of body	P	12.7		12.7		12.7		12.7	12.7	12.7	12.7	12.7	12.7	±1.0
Feed hole pitch	P0	12.7		12.7		12.7		12.7	12.7	12.7	12.7	12.7	12.7	±0.2
Distance from hole center to lead	P1	5.1	5.6	5.1	5.35	5.1	5.35	5.1	5.1	5.1	4.6	4.6	3.85	±0.7
Distance from feed hole center to body center	P2	6.35		6.35		6.35		6.35	6.35	6.35	6.35	6.35	6.35	±1.0
Lead-to-lead distance	F	2.5	1.5	2.5	2.0	2.5	2.0	2.5	2.5	2.5	3.5	3.5	5.0	±0.5
Height of body from tape center	H	18.5		18.5		18.5		18.5	18.5	18.5	18.5	18.5	18.5	±0.75
Base tape width	W	18.0		18.0		18.0		18.0	18.0	18.0	18.0	18.0	18.0	±0.5
Adhesive tape width	W0	6.0		6.0		6.0		6.0	6.0	8.0	8.0	8.0	11.0	min
Hole position	W1	9.0		9.0		9.0		9.0	9.0	9.0	9.0	9.0	9.0	+0.75 -0.5
Hole down tape position	W2	3.0		3.0		3.0		3.0	3.0	3.0	3.0	3.0	3.0	max


Specification Fig.4

Items	Symbol	Case size									Tolerance
		4*5 4*7	5*5	5*7	5*11	6.3*5	6.3*7 6.3*9	6.3*11 6.3*12	8*5/7 8*9/11 8*11.5/12	8*16 8*20	
Pin Code		P	P	P	P	P	P	P	P	P	
Lead wire diameter	Φd	0.45	0.45	0.45	0.5	0.45	0.5	0.5	0.45/0.5	0.6	±0.05
Pitch of body	P	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	±1.0
Feed hole pitch	P0	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	±0.2
Distance from hole center to lead	P1	3.85	3.85	3.85	3.85	3.85	3.85	3.85	3.85	3.85	±0.7
Distance from feed hole center to body center	P2	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	±1.0
Lead-to-lead distance	F	1.5	2.0	2.0	2.0	2.5	2.5	2.5	3.5	3.5	±0.5
Lead to lead distance	F1	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	+0.8 -0.2
Height of body from tape center	H	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	±0.75
Lead wire clinch height	H0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	±0.5
Base tape width	W	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	±0.5
Adhesive tape width	W0	6.0	6.0	6.0	6.0	6.0	6.0	8.0	8.0	8.0	min
Hole position	W1	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	+0.75 -0.5
Hole down tape position	W2	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	max

**Lead Forming**

Lead Forming & Cut

Code:C  
RANGE:  $\Phi 4 \sim \Phi 18$

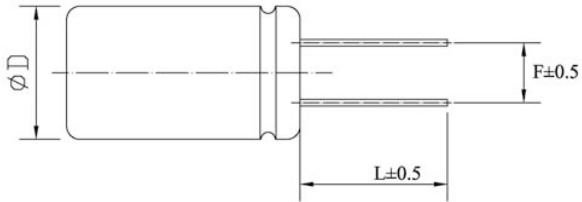

Code:F  
RANGE:  $\Phi 4 \sim \Phi 8$



$\Phi D$	F	L	$\Phi D$	F	L
4	1.5	3.0~12.0	4	5.0	3.5, 4.5, 5.0, 7.0
5	2.0	3.0~12.0	5	5.0	3.5, 4.5, 5.0, 7.0
6.3	2.5	3.0~12.0	6.3	5.0	3.5, 4.5, 5.0, 7.0
8	3.5	3.0~12.0	8	5.0	3.5, 4.5, 5.0, 7.0
10	5.0	3.0~12.0	-	-	-
12.5	5.0	3.0~12.0	-	-	-
16	7.5	3.0~12.0	-	-	-
18	7.5	3.0~12.0	-	-	-


Code:J  
RANGE:  $\Phi 10 \sim \Phi 18$



$\Phi D$	F	L
10	5.0	4.0, 4.5, 5.0
12.5	5.0	4.0, 4.5, 5.0
16	7.5	4.0, 4.5, 5.0
18	7.5	4.0, 4.5, 5.0

### Solering Recommendation


■ Flow Soldering(Radial Lead Type)

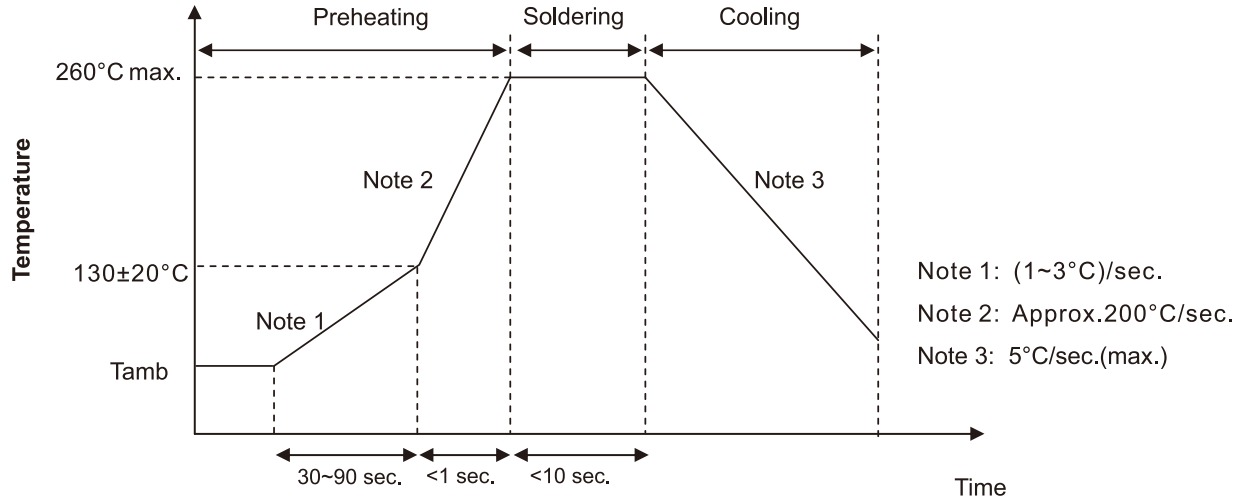

■ Reflow Soldering

- (For Polymer SMD Type)

#### Recommended Reflow Profile

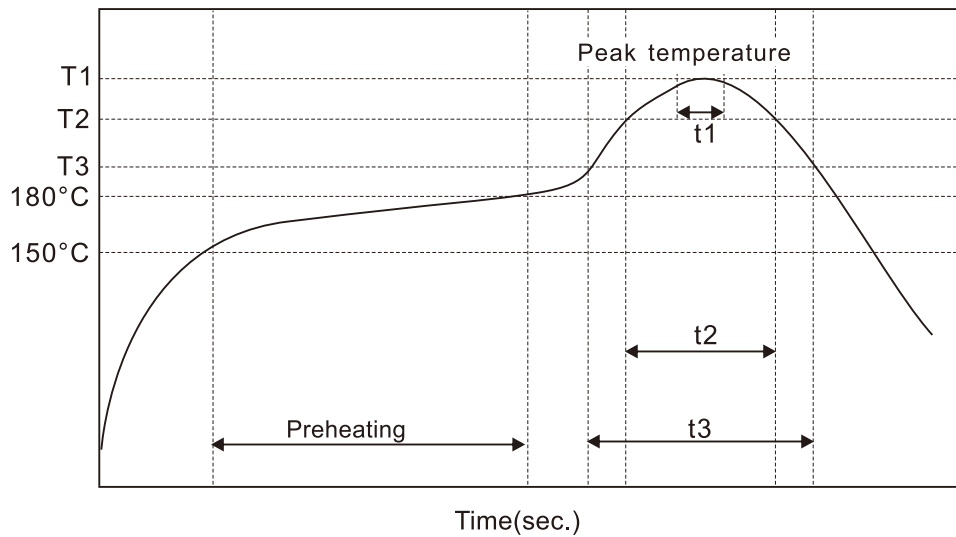


Item	Preheating	T1(°C)	T2(°C)	T3(°C)	t1(sec.)	t2(sec.)	t3(sec.)	Reflow cycle
Condition 1	150°C to 180°C Within 90sec.	≤260	230	200	≤10	≤40	≤60	1
Condition 2		≤250	230	200	≤10	≤40	≤60	2

● (For Liquid SMD Type)

Case size:  $\Phi 6.3$ – $\Phi 10$ mm:

- Temperature at surface of capacitor shall not exceed  $T^{\circ}\text{C}$ .
- The duration for over  $200^{\circ}\text{C}$  temperature and  $T_1^{\circ}\text{C}$  at surface of capacitor shall not exceed  $t$  and  $t_1$  seconds, respectively.
- Preheat shall be done at  $100^{\circ}\text{C}$  to  $200^{\circ}\text{C}$  and for Maximum 180 seconds.

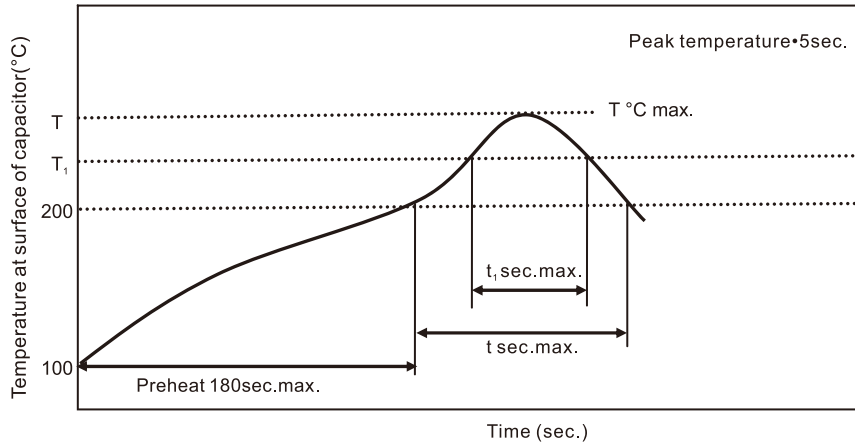


Case size (mm)	$T(^{\circ}\text{C})$ ①	$T_1(^{\circ}\text{C})$	$t(\text{sec.})$ ②	$t_1(\text{sec.})$ ③	Reflow cycle
$\Phi 6.3$	250	230	90	40	1
$\Phi 8$	240	230	90	30	1
$\Phi 10$	235	230	60	30	1

- ① Peak temperature
- ② The duration over  $200^{\circ}\text{C}$  (max.)
- ③ The duration over  $T_1^{\circ}\text{C}$
- Please contact us if capacitors are subject to the conditions other than the allowable range of reflow.

Case size:  $\Phi 12.5$ – $\Phi 18$ mm:

- Temperature at surface of capacitor shall not exceed  $T^{\circ}\text{C}$ .
- The duration for over  $200^{\circ}\text{C}$  temperature and  $T_1^{\circ}\text{C}$  at surface of capacitor shall not exceed  $t$  and  $t_1$  seconds, respectively.
- Preheat shall be done at  $100^{\circ}\text{C}$  to  $180^{\circ}\text{C}$  and for Maximum 150 seconds.

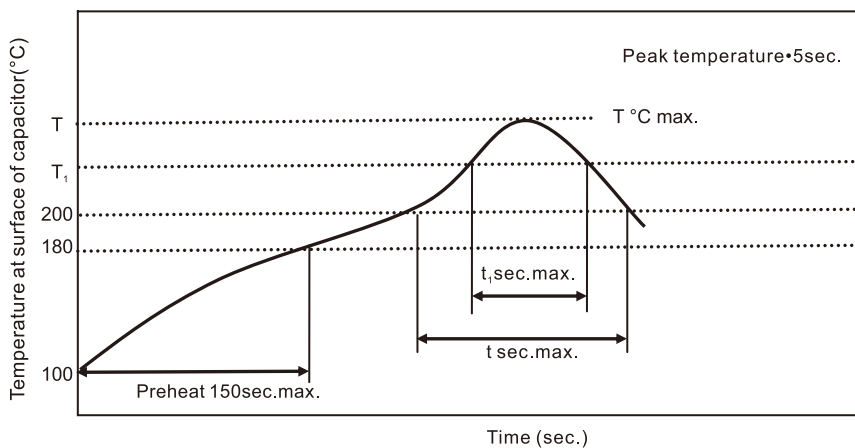

Case size (mm)	$T(^{\circ}\text{C})$ ①	$T_1(^{\circ}\text{C})$	$t(\text{sec.})$ ②	$t_1(\text{sec.})$ ③	Reflow cycle
$\Phi 12.5$ – $\Phi 18$	240	230	60	30	1

- ① Peak temperature
- ② The duration over  $200^{\circ}\text{C}$  (max.)
- ③ The duration over  $T_1^{\circ}\text{C}$
- Please contact us if capacitors are subject to the conditions other than the allowable range of reflow.

## LX series

- Extremely long life
- Endurance: 7,000 hours at 105°C
- RoHS Compliant




### SPECIFICATIONS


Items	Characteristics		
Category Temperature Range	-25~+105°C		
Rated Voltage Range	160~450V.DC		
Capacitance Tolerance	±20%(M) (at 20°C,120Hz)		
Leakage Current	$I \leq 3\sqrt{CV}$ Where, I:Max.leakage current (µA),C:Nominal capacitance (µF),V: Rated voltage (V) (at 20°C after 5 minutes)		
Dissipation Factor (tanδ)	Rated Voltage(V <sub>dc</sub> )	160~400	420~450
	tanδ (max.)	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated Voltage(V <sub>dc</sub> )	160~400	420~450
	Z(-25°C)/Z(+20°C)	4	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after DC voltage plus the rated ripple current is applied for 7,000 hours at 105 °C.		
	Capacitance Change	≤±20% of the initial value	
	D.F. (tanδ)	≤250% of the initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.		
	Capacitance Change	≤±15% of the initial value	
	D.F. (tanδ)	≤150% of the initial specified value	
Leakage Current	≤The initial specified value		
	≤150% of the initial specified value		

### DIMENSIONS[mm]


- Terminal Code : K (Φ22 to Φ35) : Standard

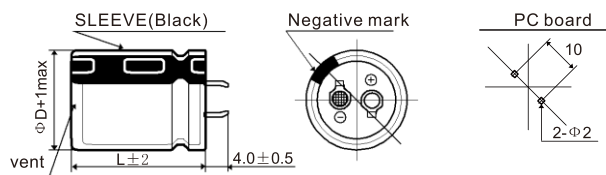

- Terminal Code : L (Φ35)

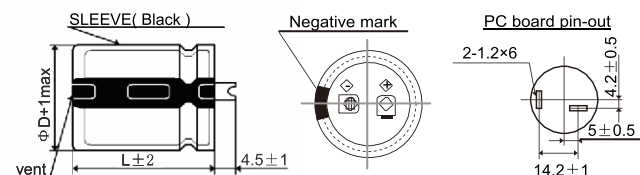

### PART NUMBERING SYSTEM

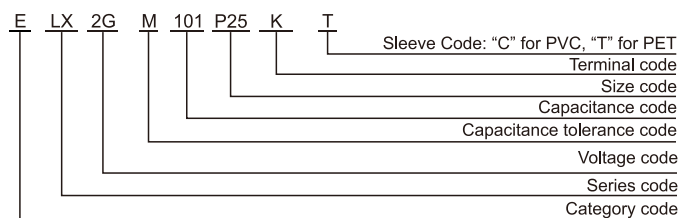

### RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current (Hz)

W.V	120	1k	10k	100k
160~250	1.00	1.32	1.45	1.50
315~450	1.00	1.30	1.41	1.43

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

LX series

■ STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (μF)	Size ΦDxL (mm)	tanδ	Rated ripple current (Arms/105°C, 120Hz)
160(2C)	330	22*25	0.15	1.11
	390	22*30	0.15	1.26
	470	22*30	0.15	1.39
		25*25	0.15	1.38
	560	22*35	0.15	1.55
		25*30	0.15	1.55
	680	22*40	0.15	1.75
		25*35	0.15	1.78
		30*25	0.15	1.74
	820	22*50	0.15	1.97
		25*40	0.15	2.01
		30*30	0.15	1.96
		25*45	0.15	2.27
	1000	30*35	0.15	2.26
		25*50	0.15	2.54
		30*40	0.15	2.56
	1200	35*30	0.15	2.52
		30*45	0.15	2.96
		35*35	0.15	2.89
	1500	30*50	0.15	3.32
35*40		0.15	3.30	
1800	35*40	0.15	3.30	
2200	35*50	0.15	3.87	
180(2L)	270	22*25	0.15	1.00
	330	22*30	0.15	1.16
	390	22*30	0.15	1.26
		25*25	0.15	1.26
	470	22*35	0.15	1.42
		25*30	0.15	1.42
	560	22*40	0.15	1.59
		25*30	0.15	1.55
		30*25	0.15	1.58
	680	22*45	0.15	1.79
		25*35	0.15	1.78
		30*30	0.15	1.79
		25*40	0.15	2.01
	820	30*35	0.15	2.04
		25*50	0.15	2.32
		30*35	0.15	2.26
	1000	35*30	0.15	2.30
		30*45	0.15	2.65
		35*35	0.15	2.58
	1200	30*50	0.15	3.03
35*40		0.15	3.01	
1500	35*45	0.15	3.41	
1800	35*50	0.15	3.87	
200(2D)	220	22*25	0.15	0.90
	270	22*30	0.15	1.05
	330	22*30	0.15	1.16
		25*25	0.15	1.16
	390	22*35	0.15	1.29
		25*30	0.15	1.29
	470	22*40	0.15	1.46
		25*30	0.15	1.42
		30*25	0.15	1.45
	560	22*45	0.15	1.63
		25*35	0.15	1.62
		30*30	0.15	1.62

WV (V <sub>dc</sub> )	Cap (μF)	Size ΦDxL (mm)	tanδ	Rated ripple current (Arms/105°C, 120Hz)
200(2D)	680	25*40	0.15	1.83
		30*30	0.15	1.79
	820	25*45	0.15	2.06
		30*35	0.15	2.04
	1000	30*45	0.15	2.42
		35*30	0.15	2.30
	1200	30*50	0.15	2.71
		35*40	0.15	2.70
		1500	35*45	0.15
	1800	35*50	0.15	3.50
220(2N)	220	22*25	0.15	0.90
	270	22*30	0.15	1.05
	330	22*35	0.15	1.19
		25*25	0.15	1.16
	390	22*40	0.15	1.33
		25*30	0.15	1.29
	470	22*45	0.15	1.49
		25*35	0.15	1.48
		30*25	0.15	1.45
		22*50	0.15	1.63
	560	25*40	0.15	1.71
		30*30	0.15	1.62
		25*45	0.15	1.87
		30*35	0.15	1.86
		25*50	0.15	2.10
	820	30*40	0.15	2.12
		35*30	0.15	2.08
		30*50	0.15	2.48
		35*40	0.15	2.46
	1000	35*45	0.15	2.78
35*50		0.15	3.20	
1500		35*50	0.15	3.20
250(2E)	180	22*25	0.15	0.82
	220	22*30	0.15	0.95
		22*35	0.15	1.08
	270	25*25	0.15	1.05
		22*40	0.15	1.22
	330	25*30	0.15	1.19
		22*45	0.15	1.36
	390	25*35	0.15	1.35
		30*25	0.15	1.32
		22*50	0.15	1.49
	470	25*40	0.15	1.52
		30*30	0.15	1.49
		25*45	0.15	1.70
		30*35	0.15	1.69
		25*50	0.15	1.91
	680	30*40	0.15	1.93
		35*30	0.15	1.90
		30*45	0.15	2.19
35*35		0.15	2.13	
820	35*40	0.15	2.46	
	35*50	0.15	2.86	
	1000	35*50	0.15	2.86
315(2F)	100	22*25	0.15	0.67
	120	22*30	0.15	0.77
	150	22*30	0.15	0.86
		25*25	0.15	0.85

Snap-in&Lug Terminal Type



## LX series

### STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (Arms/105°C, 120Hz)
315(2F)	180	22*35	0.15	0.96
		25*30	0.15	0.96
	220	22*40	0.15	1.09
		25*30	0.15	1.06
		30*25	0.15	1.08
	270	22*45	0.15	1.24
		25*35	0.15	1.23
		30*30	0.15	1.23
	330	25*40	0.15	1.40
		30*35	0.15	1.42
		35*30	0.15	1.45
	390	25*50	0.15	1.59
		30*35	0.15	1.54
	470	35*30	0.15	1.57
		30*45	0.15	1.81
	560	35*35	0.15	1.77
30*50		0.15	2.03	
680	35*40	0.15	2.02	
	35*45	0.15	2.29	
820	35*50	0.15	2.59	
350(2V)	100	22*25	0.15	0.67
	120	22*30	0.15	0.77
		25*25	0.15	0.76
	150	22*35	0.15	0.88
		25*30	0.15	0.88
	180	22*40	0.15	0.99
		25*30	0.15	0.96
		30*25	0.15	0.98
	220	22*45	0.15	1.12
		25*35	0.15	1.11
		30*30	0.15	1.11
	270	25*40	0.15	1.26
		30*35	0.15	1.28
	330	25*45	0.15	1.40
		30*35	0.15	1.42
		35*30	0.15	1.45
390	30*40	0.15	1.60	
	35*35	0.15	1.61	
470	30*50	0.15	1.86	
	35*40	0.15	1.85	
560	35*40	0.15	2.02	
680	35*50	0.15	2.36	
400(2G)	68	22*25	0.15	0.55
	82	22*30	0.15	0.63
		22*30	0.15	0.70
	100	25*25	0.15	0.70
		22*35	0.15	0.79
	120	25*30	0.15	0.79
		22*40	0.15	0.90
	150	25*30	0.15	0.88
		30*25	0.15	0.90
	180	22*45	0.15	0.99
		25*35	0.15	1.01
		30*30	0.15	1.01
220	25*40	0.15	1.14	
	30*35	0.15	1.16	

WV (V <sub>dc</sub> )	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (Arms/105°C, 120Hz)
400(2G)	270	25*50	0.15	1.32
		30*40	0.15	1.33
		35*30	0.15	1.31
	330	30*45	0.15	1.52
		35*35	0.15	1.48
		30*50	0.15	1.69
	390	35*40	0.15	1.68
		470	35*45	0.15
560	35*50	0.15	2.14	
420(2T)	56	22*25	0.20	0.50
	68	22*30	0.20	0.58
	82	22*30	0.20	0.63
		25*25	0.20	0.63
	100	22*35	0.20	0.72
		25*30	0.20	0.72
	120	22*40	0.20	0.81
		25*30	0.20	0.79
		30*25	0.20	0.80
	150	22*45	0.20	0.92
		25*35	0.20	0.92
		30*30	0.20	0.92
	180	25*40	0.20	1.03
		30*35	0.20	1.05
	220	25*50	0.20	1.19
		30*35	0.20	1.16
35*30		0.20	1.18	
270	30*45	0.20	1.38	
	35*35	0.20	1.34	
	330	30*50	0.20	1.56
390	35*40	0.20	1.55	
	35*45	0.20	1.74	
470	35*50	0.20	1.96	
450(2W)	47	22*25	0.20	0.46
	56	22*30	0.20	0.52
	68	22*30	0.20	0.58
		25*25	0.20	0.58
	82	22*35	0.20	0.65
		25*30	0.20	0.65
	100	22*40	0.20	0.74
		25*30	0.20	0.72
		30*25	0.20	0.73
	120	22*45	0.20	0.83
		25*35	0.20	0.82
		30*30	0.20	0.82
	150	25*40	0.20	0.94
		30*35	0.20	0.96
	180	25*45	0.20	1.06
		30*35	0.20	1.05
220	35*30	0.20	1.07	
	30*40	0.20	1.20	
270	35*35	0.20	1.21	
	30*50	0.20	1.41	
	35*40	0.20	1.40	
330	35*45	0.20	1.60	
390	35*50	0.20	1.79	