ROHS

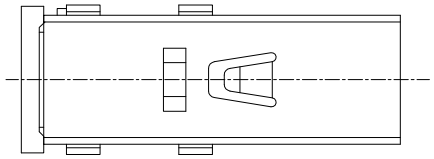

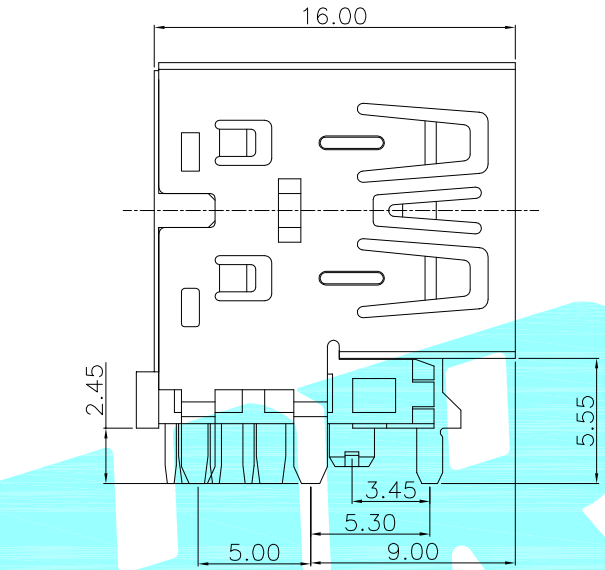

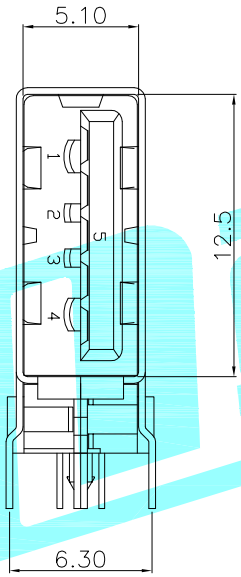

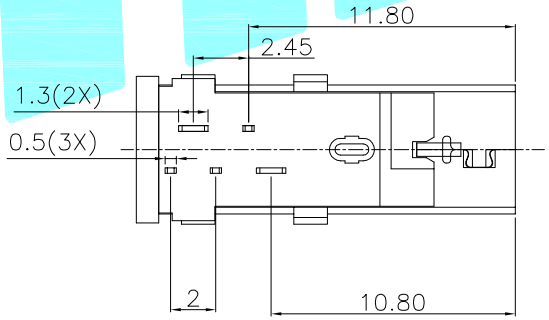

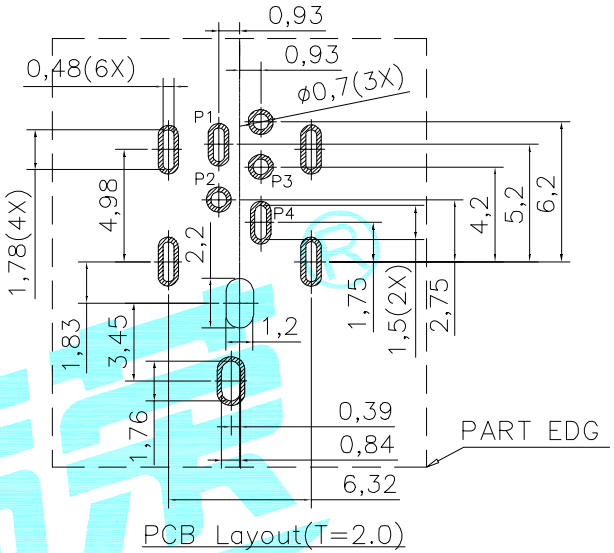

NOTES:

1. MATERIALS AND FINISHES:
   HOUSING MATERIAL:
   PIN MATERIAL:
   CONTACT AREA:
   SOLDER TAIL:
   SHELL MATERIAL: T=0.30mm
   PLATED Ni 50U" MIN

2. ELECTRICAL CHARACTERISTICS:
   CONTACT RESISTANCE:30mΩ Max.
   DIELECTRIC WITHSTANDING VOLTAGE : AC 500V R.M.S.
   INSULATION RESISTANCE: 1000MΩ MIN.
3. MECHANICAL CHARACTERISTICS:
   CONTACT INSERTION FORCE: 35 N MAX.
   CONTACT SEPARATION FORCE: 10 N MIN(AFTER CYCLE 1500).
4. MATERIAL MUST FULFILL GW14-11 SALCOMP HAZARDOUS SUBSTANCES MANAGEMENT STANDARD LATEST VERSION.

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD		
DRAWN	D.J.LV	2017/12/26			
CHECKED			TITLE:	USB CONNECTOR	
APPROVALS			PART NO.	U-A-25DD-W-1	
TOLERANCES ARE	30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1	PROJ:
			DRAWING NO.		SHEET 1 OF 1