

NISSEI

SPECIFICATION

METALLIZED POLYESTER FILM CAPACITOR

MMC, MMCF, MMCC, MMCV-100, 250, 400, 450, 630V. DC
TYPE MMC, MMCF, MMCC-1000, 1250V. DC

DRAWING No. PSC305000

PLEASE RETURN 1 COPY WITH RECEIVED STAMP.

DATE June 13, 2011

DESIGNED Y. Ootashiro

CHECKED M. Sasaki

APPROVED H. Kawagoe

NISSEI ELECTRIC CO., LTD.

No. **110086**



安全に関する注意

コンデンサを使用するに当たり、使用環境、及び取り付け環境を確認の上、納入仕様書に規定した定格性能の範囲内でご使用下さい。

納入仕様書、添付注意事項の範囲を越えて使用しますと、ショート、オープン、発煙、発火に至る場合がありますので、定格性能の範囲内であることを確認願います。

尚、納入仕様書に記載のない項目、不明な内容については、必ずお問い合わせ下さい。

又、生命に影響を与える可能性がある装置、機器（生命維持装置、航空機用制御装置、自動車用制御装置等）に使用される場合にも必ずお問い合わせ下さい。

※本仕様書は、発行日より 6 ヶ月を経過して返却されなかった場合は、受領いただけなかったものと判断し、無効とさせていただきます事ご了承願います。



Cautions About Safety In Use of Capacitors

When using a capacitor, please use one within the range of values specified in the specification after checking the environments of using and mounting.

If used beyond the range specified in the specification or the attached cautions, it may lead to short circuit, open, smoking and firing.

Be sure to inquire of us as to the items which are not specified in the specification or are unclear to you.

Also, in case of using capacitors for such equipment or apparatus as may possibly affect human lives like life-support system, aircraft and automotive control systems, etc., please never fail to inquire of us as to further details.

If this specification is not returned within six months, we consider it not to be accepted by you and will make it null and void.

Change Record

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0																					
1. SCOPE																							
This specification defines general requirements for metallized polyester film capacitor MMC type (hereinafter called capacitor).																							
2. PARTS NUMBER CODE SYSTEM																							
<table border="1"> <tr> <td>M</td><td>M</td><td>C</td><td></td> <td>*</td> <td>0</td><td>2</td><td>5</td><td>0</td> <td>J</td> <td>1</td><td>0</td><td>4</td> <td>0</td><td>0</td><td>0</td><td>0</td> <td>0</td><td>0</td><td>0</td><td>0</td> </tr> </table>			M	M	C		*	0	2	5	0	J	1	0	4	0	0	0	0	0	0	0	0
M	M	C		*	0	2	5	0	J	1	0	4	0	0	0	0	0	0	0	0			
Designation																							
MMC : Straight lead type																							
MMC F : Single-formed lead type																							
MMC C : Cutted lead type																							
MMC V : Automatic vertical insersion type (Formed lead type)																							
Internal use																							
Rated DC voltage																							
100, 250, 400, 450, 630, 1000, 1250 V.DC																							
Tolerance on capacitance																							
J : ± 5 %, K : ± 10 %																							
Capacitance Code																							
Capacitance value shall be given by 3-digit figure of which unit used is expressed in pF.																							
The first 2 digits are significant figures of the capacitance value, the third digit to indicate the number of additional zeros to follow the significant figure.																							
⑥Model code (Internal use)																							
REVISIONS																							
	SIGNATURE	DATE																					
	DESIGNED <i>Y. Ootashiro</i>	<i>April 1, 2011</i>																					
	CHECKED <i>M. Sasaki</i>	<i>April 1, 2011</i>																					
	APPROVED <i>H. Kawagoe</i>	<i>April 1, 2011</i>																					

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC PSC305000																																														
Lead dimension / Packing mode																																																
<table border="1"> <thead> <tr> <th>Designation</th> <th colspan="3">Code</th> </tr> </thead> <tbody> <tr> <td>MMC</td> <td colspan="3">0000</td> </tr> <tr> <td rowspan="4">MMC F</td> <td>Code</td> <td>Lead spacing</td> <td>Code</td> <td>Lead spacing</td> </tr> <tr> <td>0050</td> <td>5.0 mm</td> <td>0150</td> <td>15.0 mm</td> </tr> <tr> <td>0075</td> <td>7.5 mm</td> <td>0175</td> <td>17.5 mm</td> </tr> <tr> <td>0100</td> <td>10.0 mm</td> <td>0225</td> <td>22.5 mm</td> </tr> <tr> <td>0125</td> <td>12.5 mm</td> <td>0275</td> <td>27.5 mm</td> </tr> <tr> <td>MMCC</td> <td colspan="3">0050</td> </tr> <tr> <td rowspan="4">MMC V</td> <td>Code</td> <td colspan="2">Style</td> </tr> <tr> <td>0200</td> <td colspan="2">1, 5, 6</td> </tr> <tr> <td>D200</td> <td colspan="2">2</td> </tr> <tr> <td>D210</td> <td colspan="2">3</td> </tr> </tbody> </table>			Designation	Code			MMC	0000			MMC F	Code	Lead spacing	Code	Lead spacing	0050	5.0 mm	0150	15.0 mm	0075	7.5 mm	0175	17.5 mm	0100	10.0 mm	0225	22.5 mm	0125	12.5 mm	0275	27.5 mm	MMCC	0050			MMC V	Code	Style		0200	1, 5, 6		D200	2		D210	3	
Designation	Code																																															
MMC	0000																																															
MMC F	Code	Lead spacing	Code	Lead spacing																																												
	0050	5.0 mm	0150	15.0 mm																																												
	0075	7.5 mm	0175	17.5 mm																																												
	0100	10.0 mm	0225	22.5 mm																																												
0125	12.5 mm	0275	27.5 mm																																													
MMCC	0050																																															
MMC V	Code	Style																																														
	0200	1, 5, 6																																														
	D200	2																																														
	D210	3																																														
<p>3. RATING</p> <p>3.1 Operating Temperature Range : Operating temperature range to capacitors shall be $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ (Voltage derating in case of over 85).</p> <p>3.1.1 Maximum Operating Temperature : Maximum value of capacitor's surface temperature (ambient temperature+self heating temperature rise+radiation and conduction heat from other electric supply sources) at which capacitors shall be capable of applying continuously.</p> <p>3.1.2 Minimum Operating Temperature : Minimum temperature range at which capacitors shall be capable of applying continuously.</p> <p>3.2 Rated voltage : The rated voltage shall be continuously usable within a working temperature range, and there are 7 kinds of rated voltages - 100, 250, 400, 450, 630, 1000 and 1250V.DC. However, in the $+85$ to $+105^{\circ}\text{C}$ range, there is the need for voltage derating of $1.5\%/\text{ }^{\circ}\text{C}$ as shown in the following graph.</p>																																																
<table border="1"> <caption>Data points estimated from the graph</caption> <thead> <tr> <th>Temperature (°C)</th> <th>Rated voltage derating ratio (%)</th> </tr> </thead> <tbody> <tr><td>85</td><td>100</td></tr> <tr><td>90</td><td>90</td></tr> <tr><td>95</td><td>82</td></tr> <tr><td>100</td><td>75</td></tr> <tr><td>105</td><td>70</td></tr> </tbody> </table>			Temperature (°C)	Rated voltage derating ratio (%)	85	100	90	90	95	82	100	75	105	70																																		
Temperature (°C)	Rated voltage derating ratio (%)																																															
85	100																																															
90	90																																															
95	82																																															
100	75																																															
105	70																																															

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC PSC305000																					
3.3 Capacitance range																							
<table border="1"> <tr><td>100V. DC</td><td>0.033 ~ 4.7 μF</td><td>E-12</td></tr> <tr><td>250V. DC</td><td>0.0010 ~ 10.0 μF</td><td>E-12</td></tr> <tr><td>400V. DC</td><td>0.0010 ~ 4.7 μF</td><td>E-12</td></tr> <tr><td>450V. DC</td><td>0.0010 ~ 3.3 μF</td><td>E-12</td></tr> <tr><td>630V. DC</td><td>0.0010 ~ 2.2 μF</td><td>E-12</td></tr> <tr><td>1000V. DC</td><td>0.0010 ~ 0.47 μF</td><td>E-12</td></tr> <tr><td>1250V. DC</td><td>0.0010 ~ 0.22 μF</td><td>E-12</td></tr> </table>			100V. DC	0.033 ~ 4.7 μ F	E-12	250V. DC	0.0010 ~ 10.0 μ F	E-12	400V. DC	0.0010 ~ 4.7 μ F	E-12	450V. DC	0.0010 ~ 3.3 μ F	E-12	630V. DC	0.0010 ~ 2.2 μ F	E-12	1000V. DC	0.0010 ~ 0.47 μ F	E-12	1250V. DC	0.0010 ~ 0.22 μ F	E-12
100V. DC	0.033 ~ 4.7 μ F	E-12																					
250V. DC	0.0010 ~ 10.0 μ F	E-12																					
400V. DC	0.0010 ~ 4.7 μ F	E-12																					
450V. DC	0.0010 ~ 3.3 μ F	E-12																					
630V. DC	0.0010 ~ 2.2 μ F	E-12																					
1000V. DC	0.0010 ~ 0.47 μ F	E-12																					
1250V. DC	0.0010 ~ 0.22 μ F	E-12																					
3.4 Tolerance on capacitance																							
$\pm 5\%$, $\pm 10\%$																							
4. CONSTRUCTION OF CAPACITOR																							
<p>Construction shall satisfy the provision of CF922 type of JIS C 5101-1 : 1998. Capacitor shall be non-inductive wound construction with dielectric of metallized polyester film, and tinned copper wire or Sn-Cu plated copper wire shall be connected to capacitor element.</p> <p>An exterior coating shall be given damp-proofing and insulation treatments by using a flame-retardant epoxy resin (Recognized UL94V-0).</p> <p>For the products of capacitance range 333~105, at 100V, tinned copper-covered steel wire shall be used.</p>																							
<p>The diagram illustrates the cross-section of a capacitor. It shows a central rectangular component labeled 'Capacitor element (Metallized Polyester film)'. This is surrounded by a layer of 'Metal Spray (Sn base alloy)'. Two 'Lead wire' leads extend from the top and bottom of the central element. The entire assembly is embedded in 'Epoxy resin', which is further coated with 'Flame retardant epoxy resin' on the outer edges.</p>																							
5. DIMENSIONS																							
Dimensions are specified in the attached sheet.																							

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0																																					
<p>6. MARKING</p> <p>6.1 Marking item</p> <p>The capacitors shall be marked clearly by an indelible way.</p> <p>1) Rated capacitance Shall be marked with 3-digit code. Exp) 333 , 104</p> <p>2) Tolerance on rated capacitance J or K</p> <p>3) Production date code</p> <table border="1"> <thead> <tr> <th>Month Year</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11</th> <th>12</th> </tr> </thead> <tbody> <tr> <td>Odd year</td> <td>A</td> <td>B</td> <td>C</td> <td>D</td> <td>E</td> <td>F</td> <td>G</td> <td>H</td> <td></td> <td></td> <td>L</td> <td></td> </tr> <tr> <td>Even year</td> <td>N</td> <td>P</td> <td>Q</td> <td>R</td> <td>S</td> <td>T</td> <td>U</td> <td>V</td> <td>W</td> <td>X</td> <td>Y</td> <td>Z</td> </tr> </tbody> </table> <p>4) Rated DC voltage Unit code V is omitted.</p> <p>5) Manufacturer's Identification N I S</p> <p>6.2 Marking position</p> <p>(Example)</p> <p>105K250 N I S A</p>	Month Year	1	2	3	4	5	6	7	8	9	10	11	12	Odd year	A	B	C	D	E	F	G	H			L		Even year	N	P	Q	R	S	T	U	V	W	X	Y	Z
Month Year	1	2	3	4	5	6	7	8	9	10	11	12																											
Odd year	A	B	C	D	E	F	G	H			L																												
Even year	N	P	Q	R	S	T	U	V	W	X	Y	Z																											

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC PSC305000																								
7. PACKING																										
1) Straight leads, formed leads, double formed leads and cutted leads type. The capacitors shall be put in poly-bag and packed in box marked with necessary information.																										
Inside packing case																										
<table border="1"> <thead> <tr> <th colspan="3">Dimension (mm)</th> </tr> <tr> <th>W</th> <th>L</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>198</td> <td>176</td> <td>74</td> </tr> </tbody> </table>			Dimension (mm)			W	L	H	198	176	74															
Dimension (mm)																										
W	L	H																								
198	176	74																								
External packing case																										
<table border="1"> <thead> <tr> <th colspan="3">Dimension (mm)</th> </tr> <tr> <th>Inside packing case quantity</th> <th>W</th> <th>L</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>165</td> <td>210</td> </tr> <tr> <td>4</td> <td>210</td> <td>310</td> </tr> <tr> <td>6</td> <td>235</td> <td>410</td> </tr> <tr> <td>8</td> <td>310</td> <td>410</td> </tr> <tr> <td>12</td> <td>410</td> <td>450</td> </tr> <tr> <td></td> <td></td> <td>"</td> </tr> </tbody> </table>			Dimension (mm)			Inside packing case quantity	W	L	2	165	210	4	210	310	6	235	410	8	310	410	12	410	450			"
Dimension (mm)																										
Inside packing case quantity	W	L																								
2	165	210																								
4	210	310																								
6	235	410																								
8	310	410																								
12	410	450																								
		"																								
Example) Example)																										
<table border="1"> <tr> <td>CODE CUSTOMER</td> <td>INSP DATE</td> <td>PKG NO</td> </tr> <tr> <td>PARTS NO</td> <td>MACH NO</td> <td>QTY/PKG</td> </tr> <tr> <td>ORDER NO ⑤</td> <td>LOT NO ⑥</td> <td>ROHS ⑦</td> </tr> <tr> <td>TYPE</td> <td>TOL</td> <td>CAP</td> <td>EDP CODE</td> <td>QT (PCS)</td> </tr> <tr> <td>WV</td> <td>CAP</td> <td>W V</td> <td></td> <td></td> </tr> </table>			CODE CUSTOMER	INSP DATE	PKG NO	PARTS NO	MACH NO	QTY/PKG	ORDER NO ⑤	LOT NO ⑥	ROHS ⑦	TYPE	TOL	CAP	EDP CODE	QT (PCS)	WV	CAP	W V							
CODE CUSTOMER	INSP DATE	PKG NO																								
PARTS NO	MACH NO	QTY/PKG																								
ORDER NO ⑤	LOT NO ⑥	ROHS ⑦																								
TYPE	TOL	CAP	EDP CODE	QT (PCS)																						
WV	CAP	W V																								
<table> <tr> <td>CODE CUSTOMER</td> <td>MACH NO</td> <td>PRODUCTION COUNTRY</td> <td>TOL(%)</td> </tr> <tr> <td>INSP DATE</td> <td>ORDER NO</td> <td>TYPE</td> <td>CAP</td> </tr> <tr> <td>PARTS NO</td> <td>LOT NO</td> <td>W V</td> <td>EDP CODE</td> </tr> <tr> <td></td> <td></td> <td></td> <td>QT(PCS)</td> </tr> </table>			CODE CUSTOMER	MACH NO	PRODUCTION COUNTRY	TOL(%)	INSP DATE	ORDER NO	TYPE	CAP	PARTS NO	LOT NO	W V	EDP CODE				QT(PCS)								
CODE CUSTOMER	MACH NO	PRODUCTION COUNTRY	TOL(%)																							
INSP DATE	ORDER NO	TYPE	CAP																							
PARTS NO	LOT NO	W V	EDP CODE																							
			QT(PCS)																							
2) Automatic vertical insertion type. This is specified by the specification of automatic vertical insertion type.																										

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0

8. APPLICABLE STANDARD

Unless otherwise specified, performance and a testing method shall comply with JIS C 5101-1:1998.

9. DISUSE OF O.D.C.

No ozone depleting chemicals are used at any stage of the manufacturing process.

10. DISUSE OF PBBO, PBDPO, PBDPE, PBBs

This products does not contain PBBO, PBDPO, PBDPE, PBBs.

11. CERTAIN HAZARDOUS SUBSTANCES RESTRICTED BY RoHS DIRECTIVE

In the product, materials to which certain hazardous substances restricted by RoHS Directive (2002/95/EC) (cadmium, hexavalent chromium, mercury, lead, PBB and PBDE) are added on purpose aren't used.

12. PRODUCTION COUNTRY

- JAPAN
- CHINA

Production country shall be distinguished in the column .

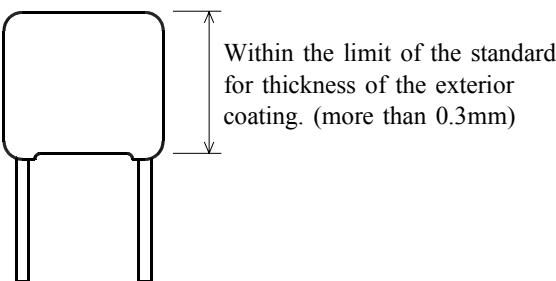
Example) JP : JAPAN
 blank : CHINA

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0
13. CHARACTERISTICS AND TEST CONDITIONS		
13.1 TEST CONDITIONS		
The test and measurement, unless otherwise specified, the standard range of atmospheric conditions for marking measurements and test is as follows		
Dielectric strength	Ambient temperature : 5 to 35°C	
	Relative humidity : 45 to 85%	
If there may be anydoubt on the results, measurements shall be made within the following limits,		
13.2 Electrical characteristics test	Ambient temperature : $20 \pm 2^\circ\text{C}$	
	Relative humidity : 60 to 75%	
Item	Characteristics	Test conditions
Dielectric strength	Between terminations No breakdown. However momentary breakdown is permissible.	Capacitors shall withstand 150% of rated DC voltage for 1 minute or 175% of rated DC voltage for 1~5 seconds. (Charge or discharge current : 1A max)
	Between termination and case No breakdown.	Capacitors shall withstand 200% of rated DC voltage for 1~5 seconds.
Insulation resistance (Between terminations)	C $\leq 0.33 \mu\text{F}$ 15,000M or more ----- C $> 0.33 \mu\text{F}$ 5,000 F or more	DC voltage specified below shall be applied for 1 minute, after which measurement shall be made. Test voltage : 100V. DC
Capacitance	Within the nominal tolerance.	Capacitance shall be measured with 1kHz $\pm 20\%$, 5Vrms max.
Tangent of loss angle	0.008 or less	

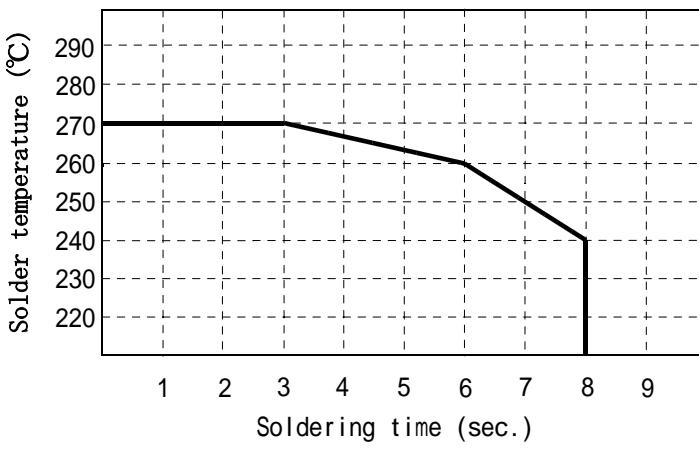
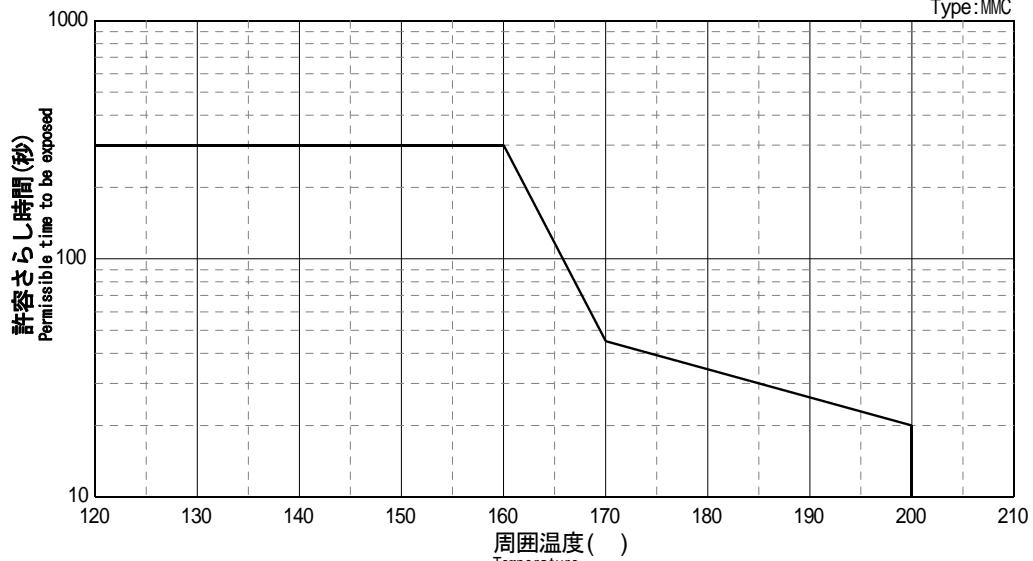
SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0
Item	Characteristics	Test conditions
Connection of element	<p>There shall be no intermittent contacts or open circuiting which would result in any needle deflection on the voltage detector.</p>	<p>As in the diagramed circuit measure the variation of terminal voltage for the series resistor(R) while a weak impact is made on the test capacitor to check the bonding strength of the terminals to the capacitor.</p> <p>C : Capacitor R : Series resistor $R() = 150/C(\mu F)$ C=Nominal capacitance μF ④ : Detector Internal impedance shall be large enough as compared with c. E : 100mV (peak value) Max at 10k~1MHz</p>
13.3 Mechanical characteristics test		
Item	Characteristics	Test conditions
Termination strength	Tensile strength	Test capacitors shall be fixed, and unless otherwise specified, a tensile force of 10N shall be gradually applied to the axial of the leads, and then maintained for 30 ± 5 seconds.
	Bending strength	<p>Without mechanical damage, such as break of terminal damage.</p> <p>The bend test shall consist of hanging a weight of 5N to the end of the leads and then rotating the capacitors 90° in one direction, then to the starting point. This test shall be applied for 2.5 seconds per each time.</p> <p>At the same test speed, the capacitors shall be rotated 90° in alternating direction, then return to the starting point.</p>

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0
Item	Characteristics	Test conditions
Vibration resistance	No electrical discontinuity such as opening, short-circuit of 0.5ms or more. Also, no abnormality on appearance after test.	Capacitors shall be capable of withstanding without malfunctioning such as short, open circuit or a damage to a vibration test in three directions against perpendicularity at a frequency range from 10Hz to 55Hz. The frequency shall be varied uniformiy from 10Hz to 55Hz at 1.5mm amplitude and back to 10Hz in approximately 1 minute intervals. This test shall be applied 2 hours per each direction, total 6 hours.
Solderability	At least 3/4 of the circumferential face of termination up to immersed level shall be covered with new solder.	Capacitor's leads shall be immersed into Flux (10% rosin) for 5~10 seconds using sheltering board from radial test, then immersed into soldering bath at 230 ± 5 for 2 ± 0.5 seconds up to the depth of to the depth of 1.5~2mm from the bottom of the body. Immersed and removing speed shall be 25 ± 2.5 mm/sec.
Resistance to soldering heat	Appearance	No visible damage.
	Dielectric strength (Between terminations)	No breakdown.
	Capacitance change	Within $\pm 3\%$ of the initial value.
		Using sheltering board from the radial heat, capacitor's leads shall be immersed into soldering bath at 260 ± 5 for 10 ± 1 seconds up to the depth of 1.5~2mm from the bottom of the body. The capacitors shall withstand 150% of rated DC voltage for 1 minute.
13.4 Climatic test		
Item	Characteristics	Test conditions
Cold	Capacitance change	Within +0, -7% of the initial value. Measured at $-40 \pm 2^\circ\text{C}$.
Dry heat	Insulation resistance	$C \leq 0.33 \mu\text{F}$ 900M or more $C > 0.33 \mu\text{F}$ 300 F or more Measured at 85 ± 2 .
	Capacitance change	Within +5, -2% of the initial value.

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0
Item	Characteristics	Test conditions
Humidity resistance (steady state)	Appearance	No visible damage.
	Dielectric strength (Between terminations)	No breakdown.
	Insulation resistance	$C \leq 0.33 \mu F$ 2,700M or more $C > 0.33 \mu F$ 900 F or more
	Tangent of loss angle	0.01 or less
	Capacitance change	Within $\pm 7\%$ of the initial value.
Endurance test for humidity	Appearance	No visible damage.
	Dielectric strength (Between terminations)	No breakdown.
	Insulation resistance	$C \leq 0.33 \mu F$ 2,700M or more $C > 0.33 \mu F$ 900 F or more
	Tangent of loss angle	0.01 or less
	Capacitance change	Within $\pm 7\%$ of the initial value.
Endurance test for high temperature	Appearance	No visible damage.
	Insulation resistance	$C \leq 0.33 \mu F$ 2,700M or more $C > 0.33 \mu F$ 900 F or more
	Tangent of loss angle	0.01 or less
	Capacitance change	Within $\pm 5\%$ of the initial value.
		The voltage of 125% of rated voltage shall be continuously applied to the capacitor through a series of 20~1,000 per 1 voltage in the test chamber at 85 ± 3 for $1,000 \pm 4$ hours.

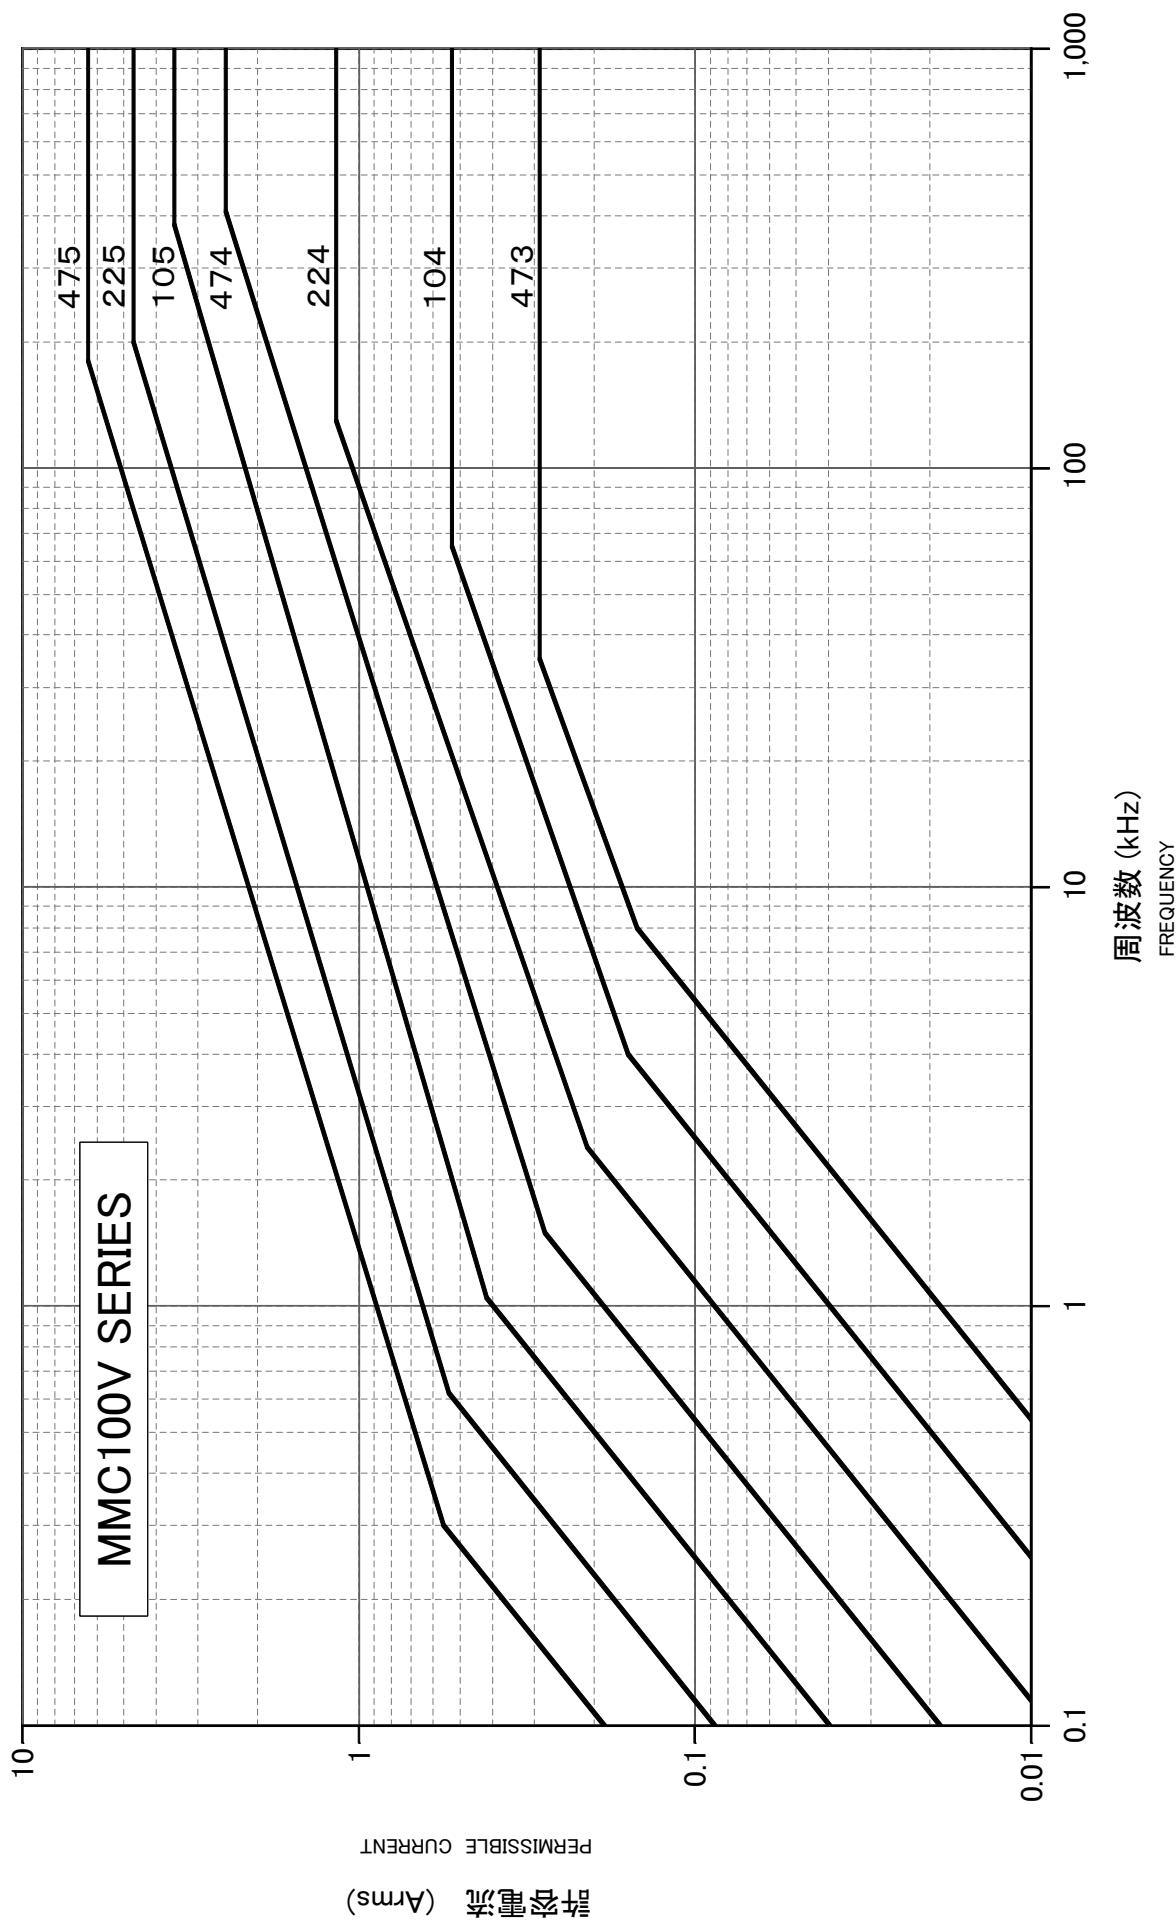
SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC PSC305000
14. SPECIAL STANDARD		
For rated voltage 1,000V and 1,250V, special standard described below shall be followed.		
14.1 Minimum thickness of the exterior coating		
For rated voltage 1,000V and 1,250V, thickness of the exterior coating shall be more than 0.3mm.		
The limit of the standard for the exterior coating of capacitors is shown below.		
 <p>Within the limit of the standard for thickness of the exterior coating. (more than 0.3mm)</p>		
14.2 Damp - proof insulation test :		
Capacitors shall be put in 40°C & 90~95%RH for 8 hours and then lest at room temperature for 16 hours.		
After 5 cycles test, capacitors shall meet the requirements of the following test.		
(1) Dielectric Strength		
Between terminations : Applied 1,000V.AC for 1 minute. After the test, there shall be no dielectric breakdown or other damage.		
Between termination and case : Applied 1,500V.AC for 1 minute. After the test, there shall be no dielectric breakdown or other damage.		
(2) Insulation resistance		
Between terminations : More than 2,000M Between termination and case : More than 500M		
14.3 Dielectric Strength		
Between terminations : Applied 1,000V.AC for 1 minute. After the test, there shall be no dielectric breakdown or other damage.		
Between termination and case : Applied 1,500V.AC for 1 minute. After the test, there shall be no dielectric breakdown or other damage.		

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0																
15. REGULATION IN USAGE																		
15.1 Voltage derating for frequency																		
15.1.1 A.C.maximum operating voltage in case of operating with commercial frequency (50 or 60Hz) is as shown in the table below. However, it can not be used for "Across-the-line" application.																		
<table border="1"> <thead> <tr> <th>Rated voltage</th><th>A.C.maximum operating voltage</th></tr> </thead> <tbody> <tr> <td>100 V. DC</td><td>63 V rms</td></tr> <tr> <td>250 V. DC</td><td>125 V rms</td></tr> <tr> <td>400 V. DC</td><td>200 V rms</td></tr> <tr> <td>450 V. DC</td><td>200 V rms</td></tr> <tr> <td>630 V. DC</td><td>250 V rms</td></tr> <tr> <td>1000 V. DC</td><td>400 V rms</td></tr> <tr> <td>1250 V. DC</td><td>500 V rms</td></tr> </tbody> </table>			Rated voltage	A.C.maximum operating voltage	100 V. DC	63 V rms	250 V. DC	125 V rms	400 V. DC	200 V rms	450 V. DC	200 V rms	630 V. DC	250 V rms	1000 V. DC	400 V rms	1250 V. DC	500 V rms
Rated voltage	A.C.maximum operating voltage																	
100 V. DC	63 V rms																	
250 V. DC	125 V rms																	
400 V. DC	200 V rms																	
450 V. DC	200 V rms																	
630 V. DC	250 V rms																	
1000 V. DC	400 V rms																	
1250 V. DC	500 V rms																	
15.1.2 When containing a portion of D.C.Bias, the crasy value (peak voltage V_{o-p}) waveform shall not exceed the rated voltage.																		
15.2 Permissible current to frequency																		
A permissible current is regilated by both a root-mean-square value current and a peak current. A root-mean-square value current is to be a permissible current value to frequency attached. A permissible peak current is determined by a permissible peak current value attached.																		
The values of continuous peak current in the allowable peak current shall be those of continuous current, and the values of single peak current shall be those of discontinuous current such as rush current in switching on or off. The highest number of times of single peak current shall be limited to 10,000 times. (In case of exceeding 10,000 times, please contact us.)																		
15.3 Permissible current to temperature																		
When operating in the range of $+85^{\circ}\text{C} \sim +105^{\circ}\text{C}$ with waveform except direct current, the value for characteristic of permissible current to frequency shown in Fig. shall be derated 1.5% at each 1°C .																		

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC PSC305000
15.4 Soldering		
When soldering a capacitor, heat in soldering is conducted to the elements of the capacitor from lead wire and an enclosure, and hence it should be noted that soldering under high temperature and a long period may cause deterioration of characteristic or breakdown of capacitors.		
Be sure to solder within the following temperature condition range.		
(1) Flow soldering		
 <p>Preheating condition : 120°C, for 90 seconds</p>		
(2) When using soldering iron		
<p>Iron tip temperature less than 350 Soldering time (sec.) within 5 seconds</p>		
(3) When soldering a capacitor mounted on the board with chip-type components		
<p>When applying the curing heat for fixing the chip components, the duration for which a capacitor is exposed to heat shall be within the permissible time, which changes according to the ambient temperature of the capacitor as shown in the annex.</p>		
<p style="text-align: center;">周囲温度による許容さらし時間 Permissible time to be exposed to the ambient temperature</p>  <p>Type: MMC</p>		

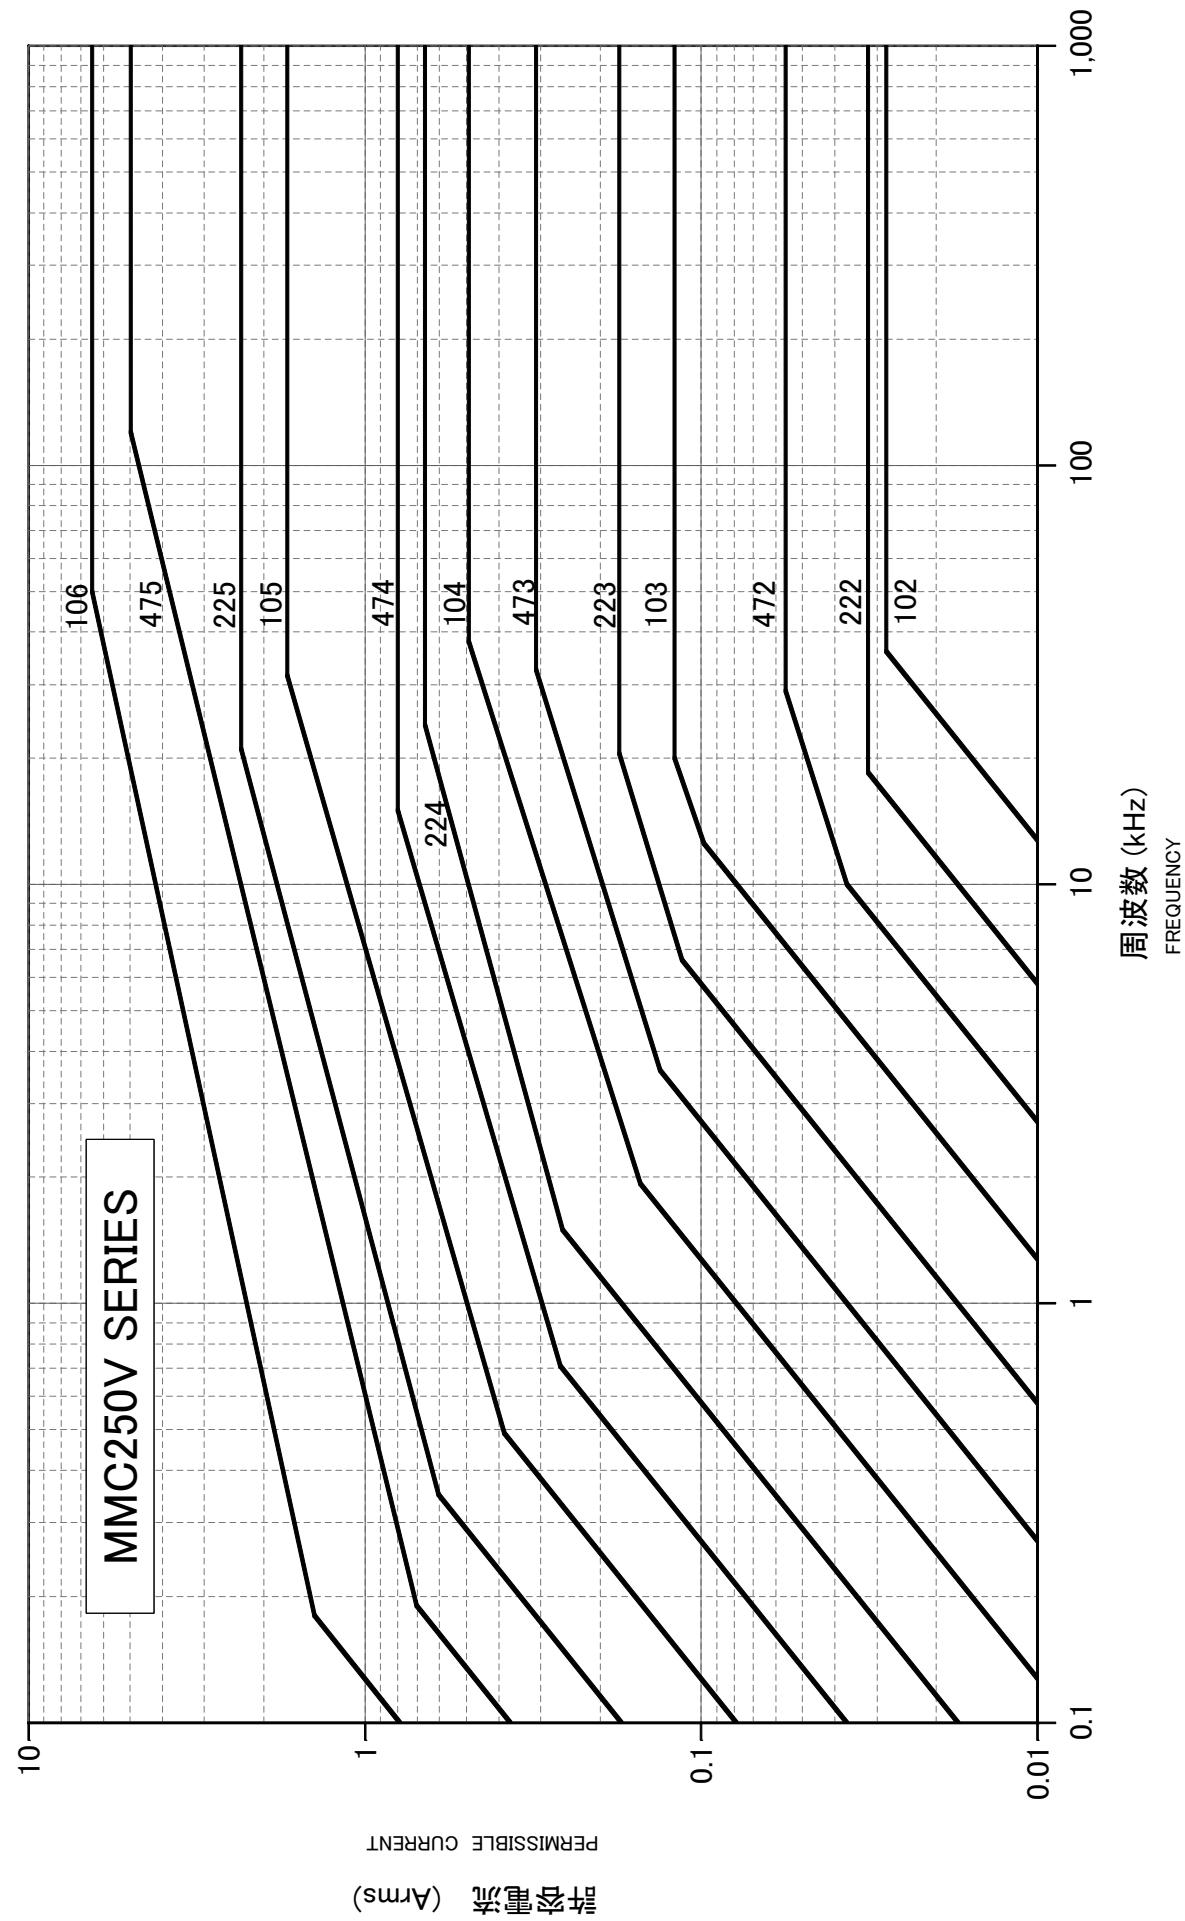
周波数に対する許容電流特性（正弦波）

CHARACTERISTICS OF PERMISSIBLE CURRENT TO FREQUENCY (SINUSOIDAL WAVE)



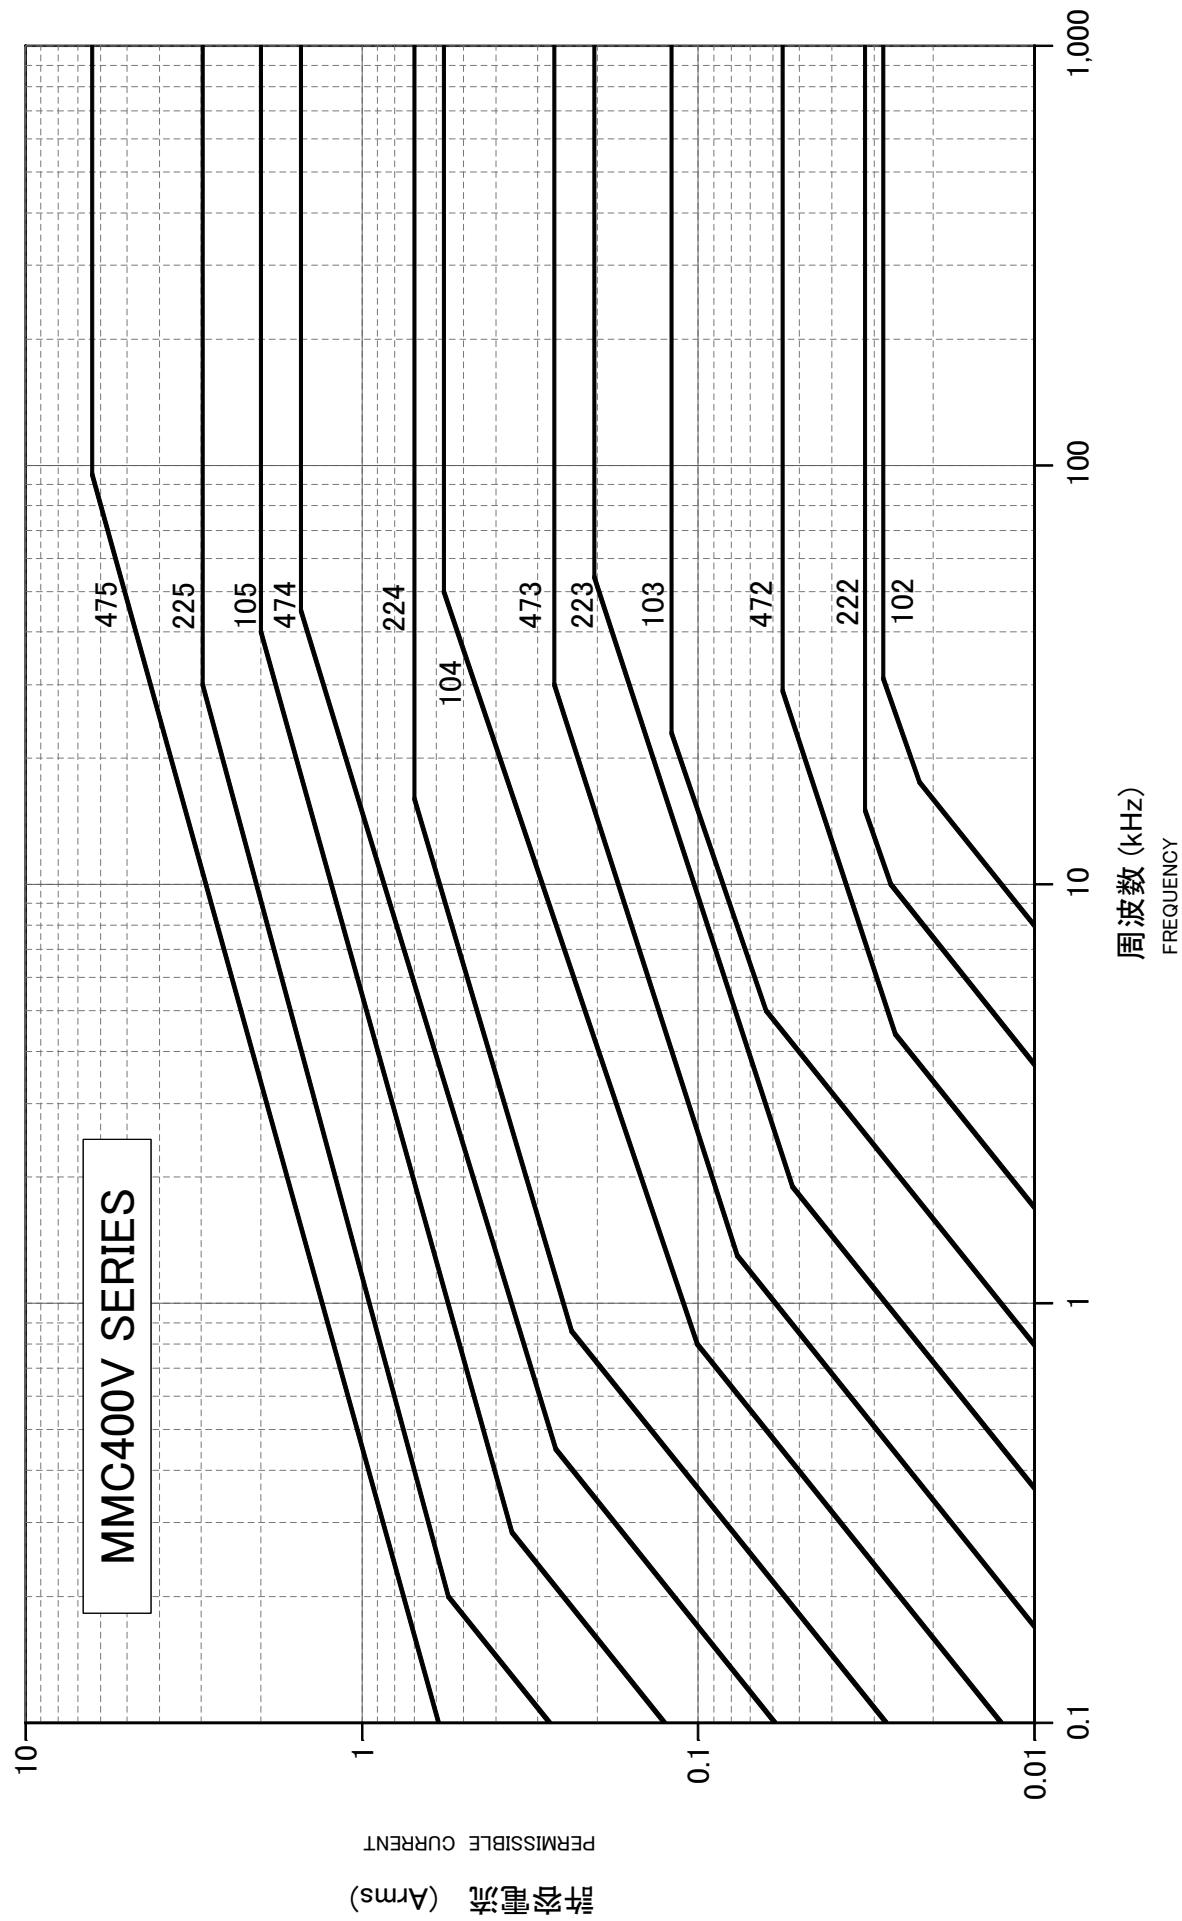
周波数に対する許容電流特性（正弦波）

CHARACTERISTICS OF PERMISSIBLE CURRENT TO FREQUENCY (SINUSOIDAL WAVE)



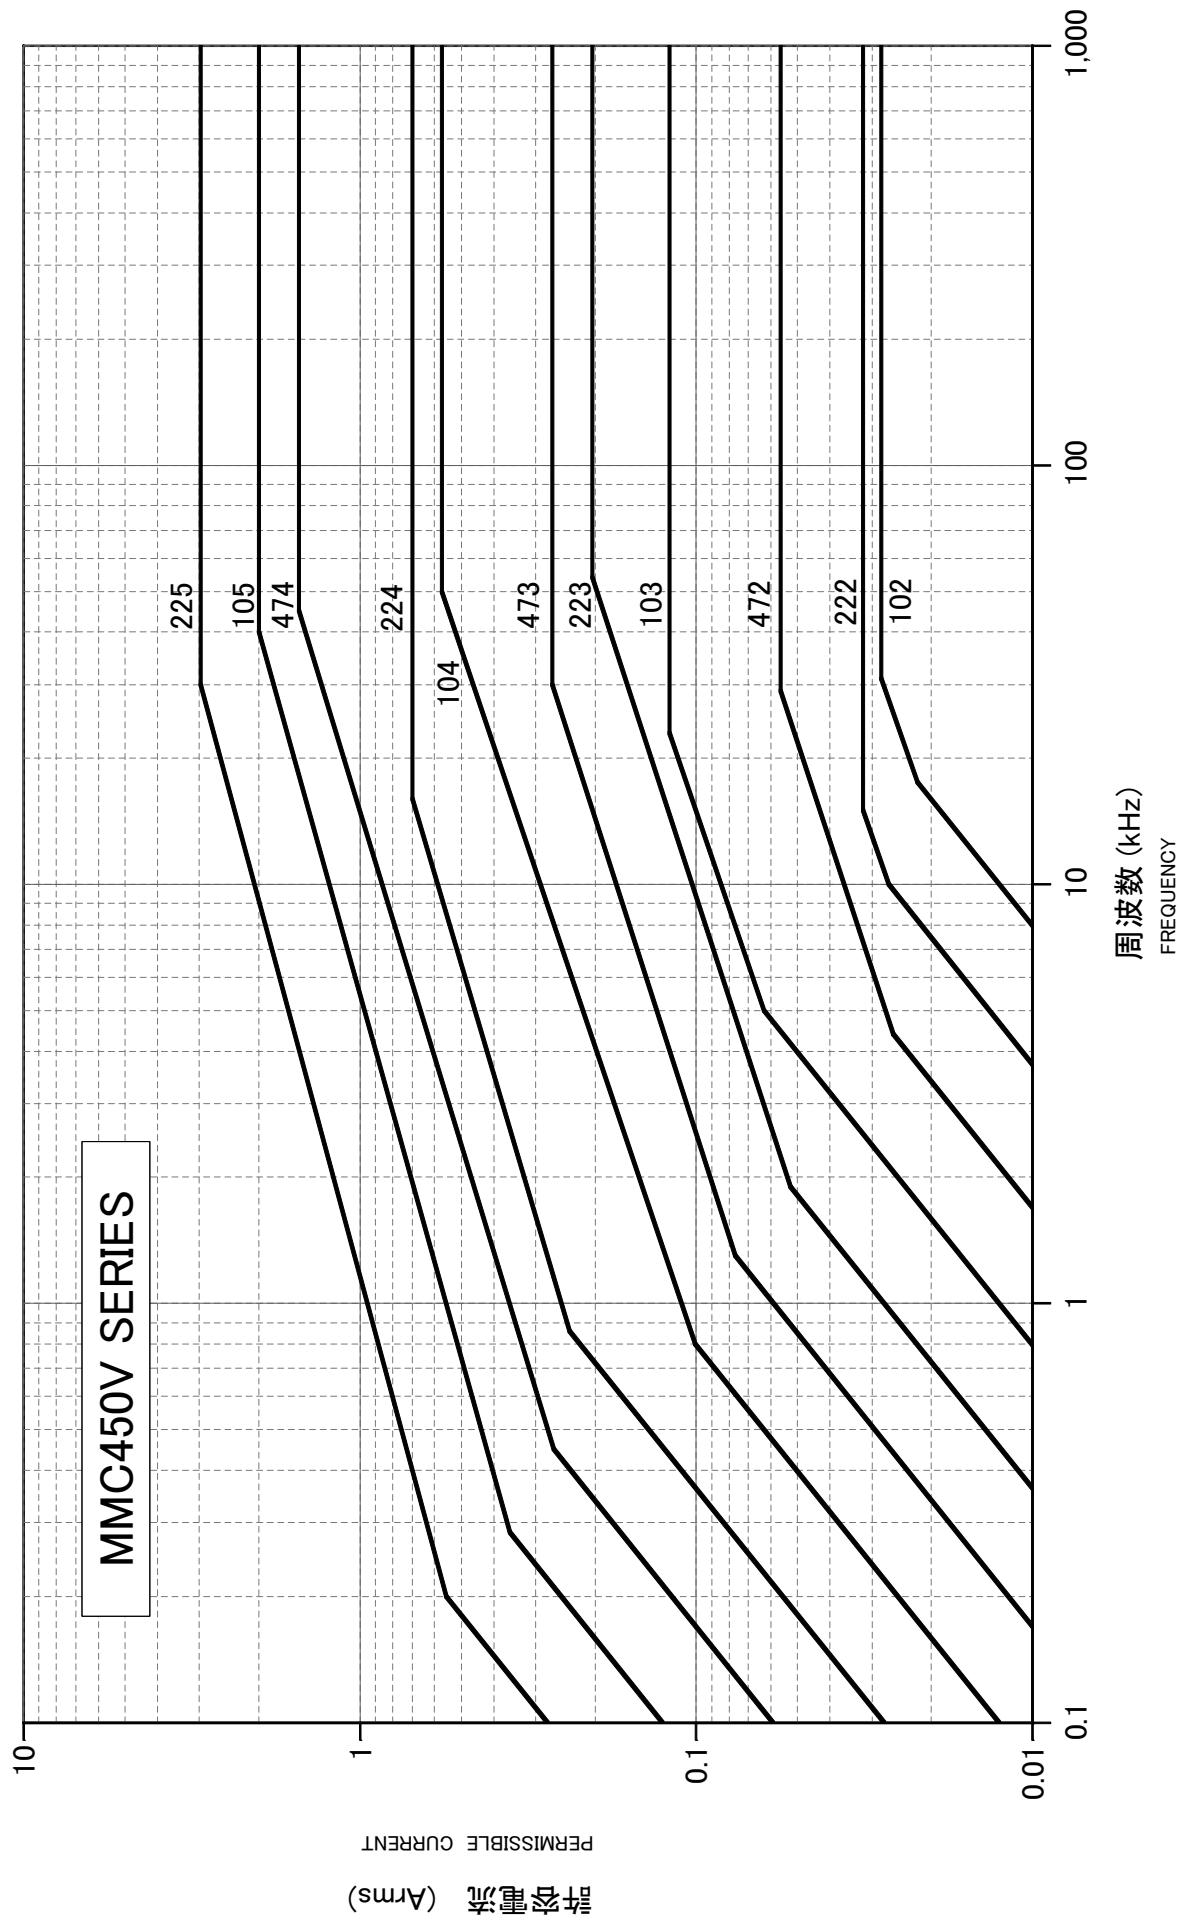
周波数に対する許容電流特性（正弦波）

CHARACTERISTICS OF PERMISSIBLE CURRENT TO FREQUENCY (SINUSOIDAL WAVE)



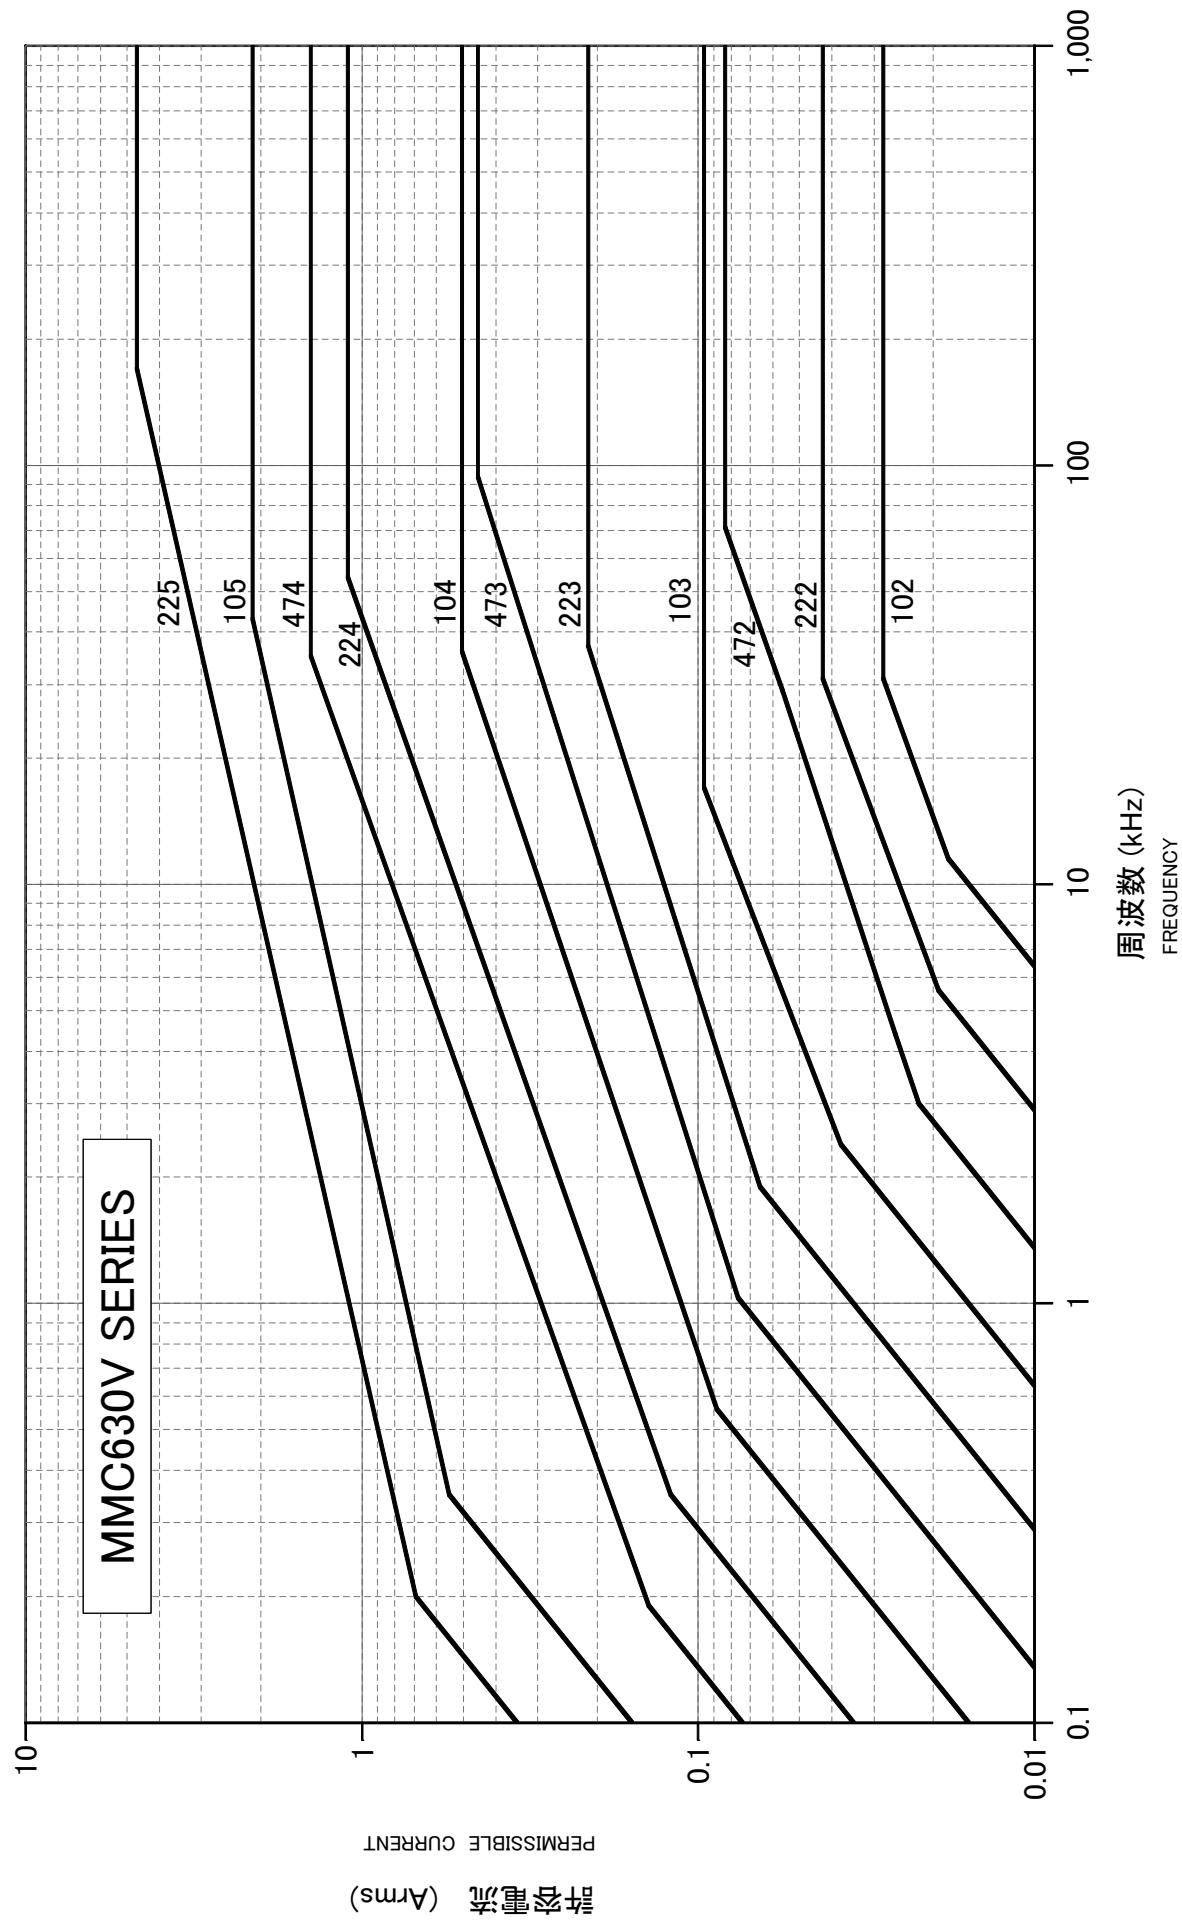
周波数に対する許容電流特性（正弦波）

CHARACTERISTICS OF PERMISSIBLE CURRENT TO FREQUENCY (SINUSOIDAL WAVE)



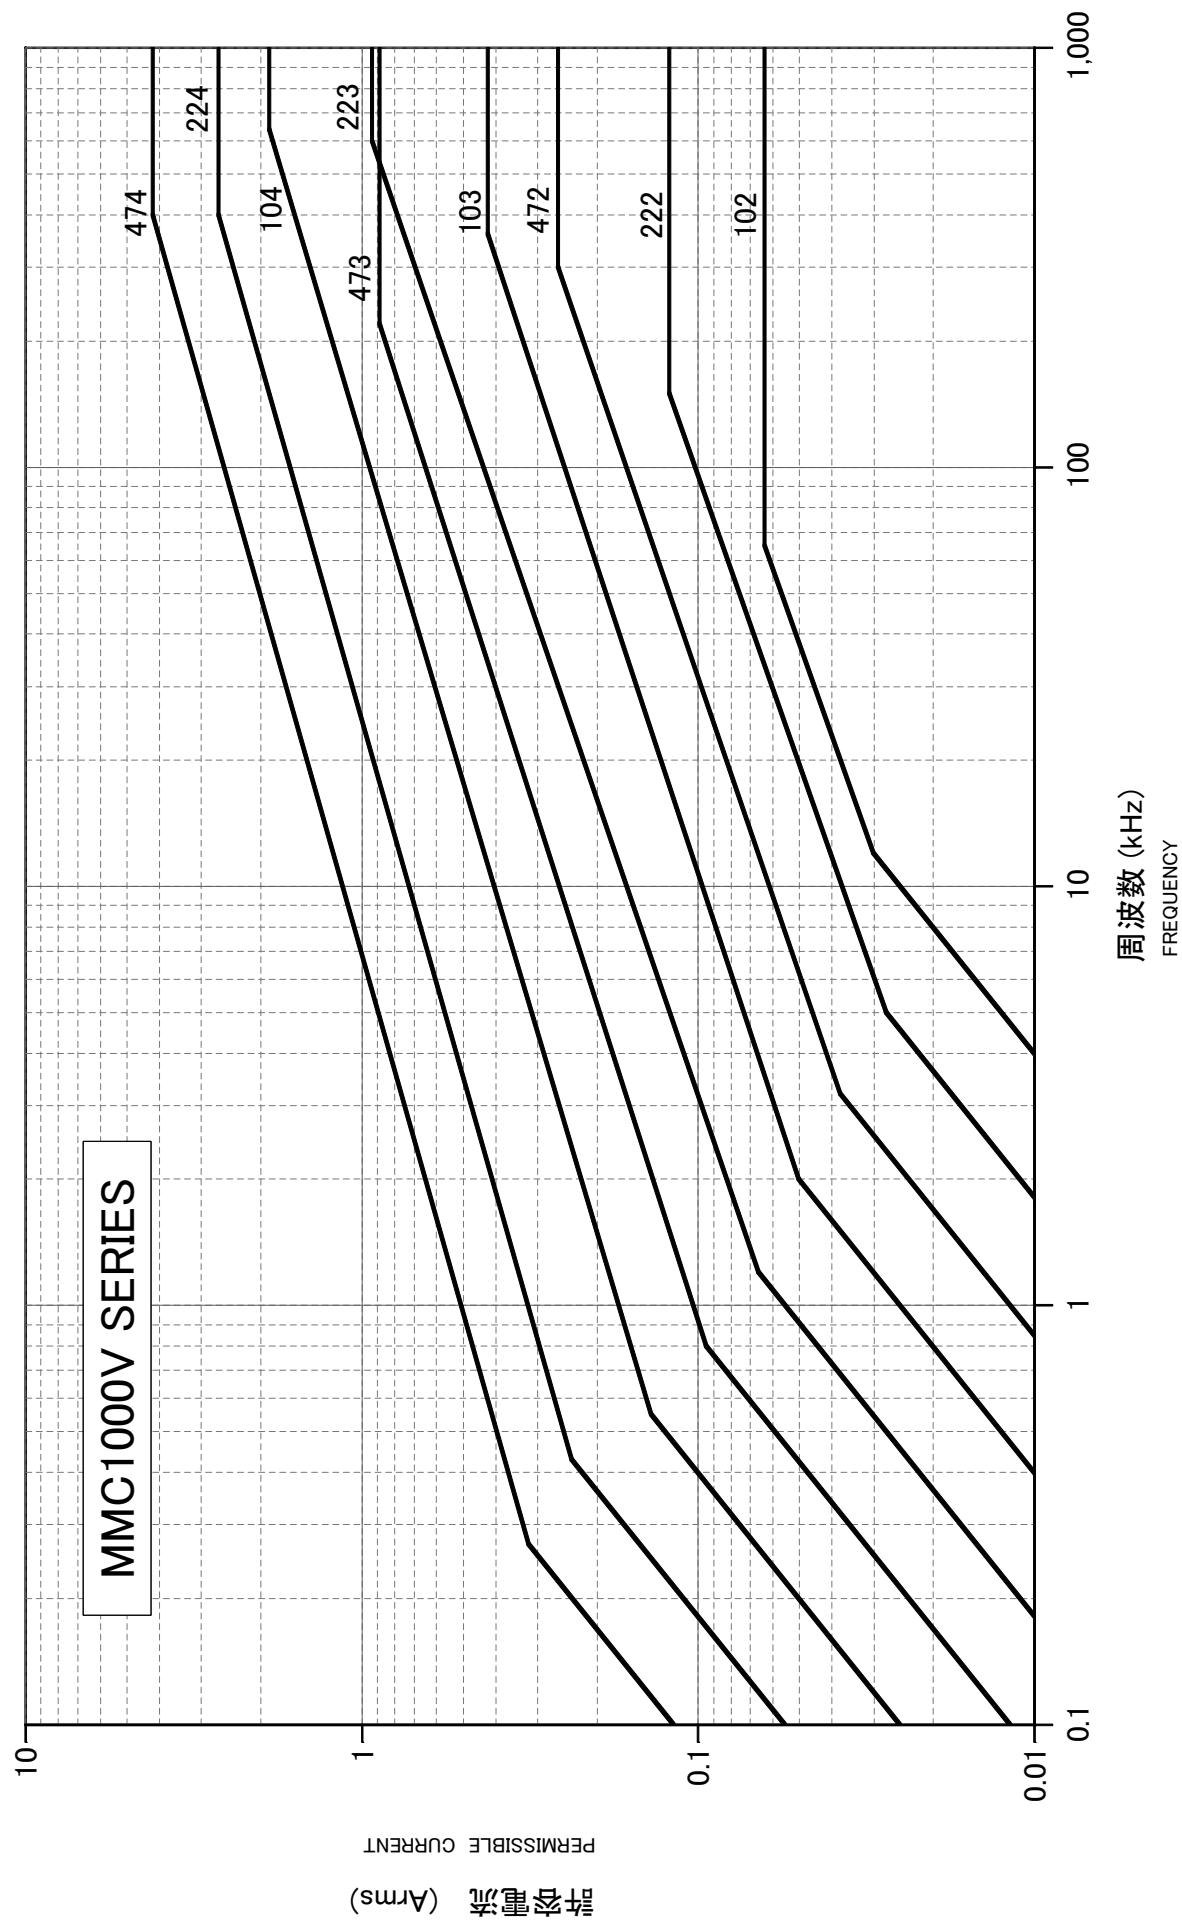
周波数に対する許容電流特性（正弦波）

CHARACTERISTICS OF PERMISSIBLE CURRENT TO FREQUENCY (SINUSOIDAL WAVE)



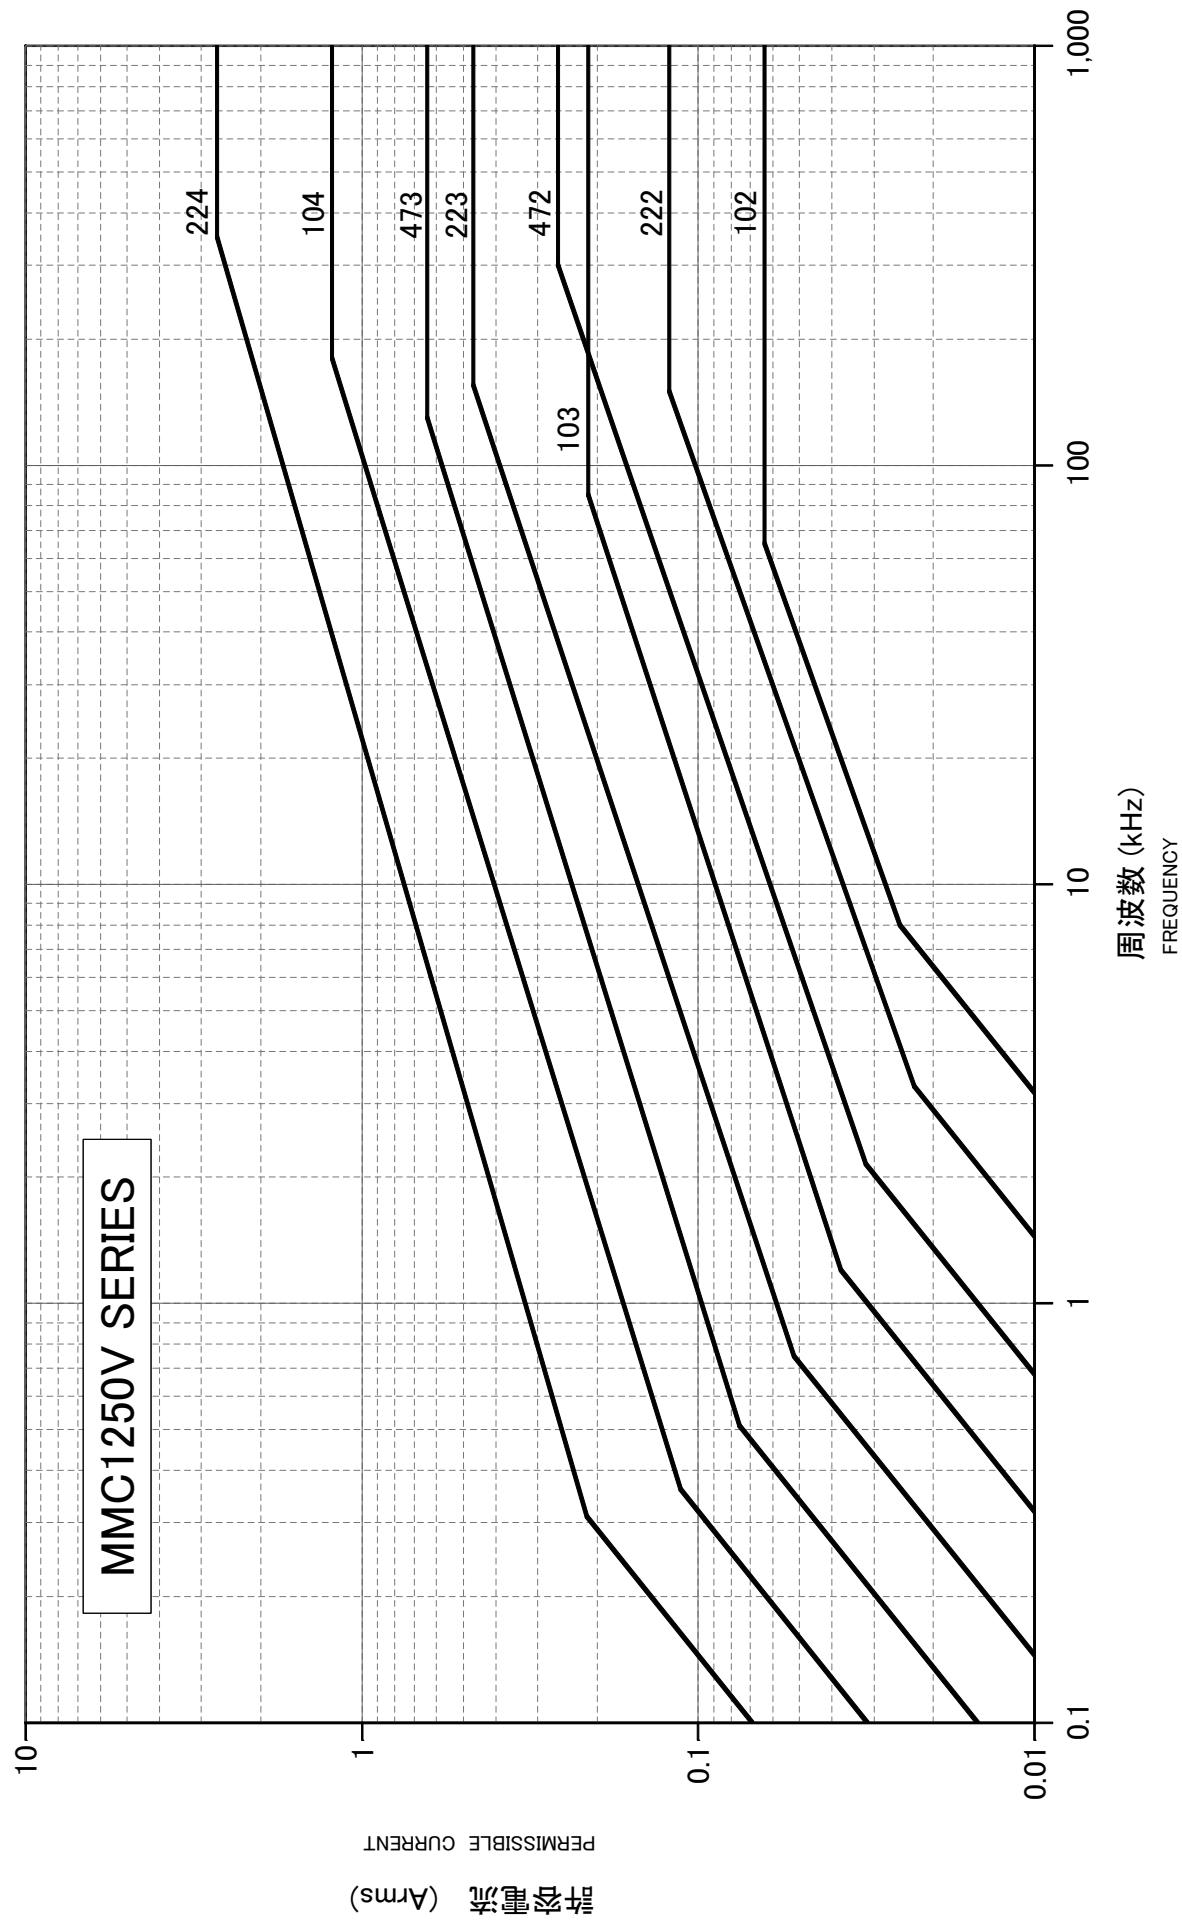
周波数に対する許容電流特性（正弦波）

CHARACTERISTICS OF PERMISSIBLE CURRENT TO FREQUENCY (SINUSOIDAL WAVE)



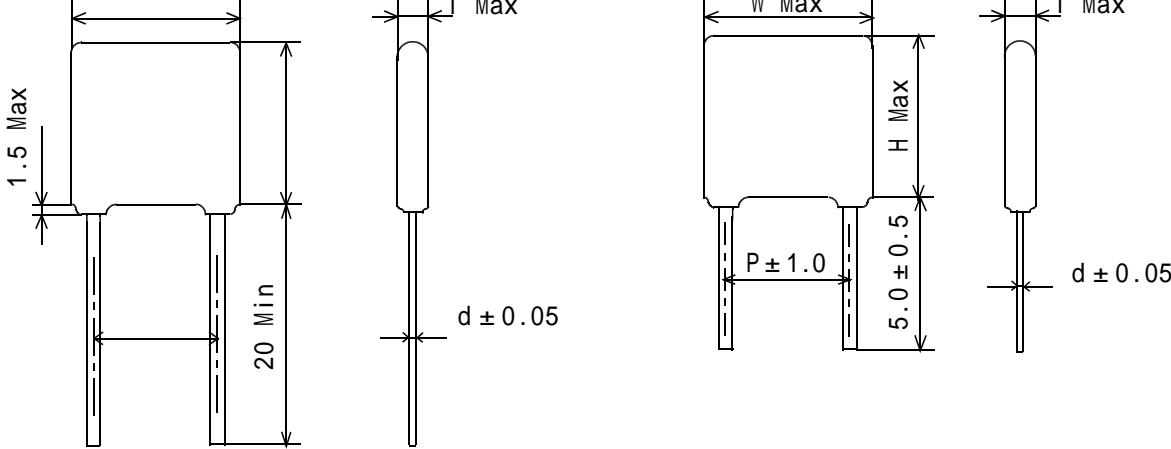
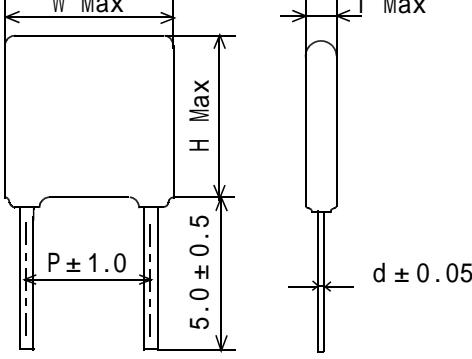
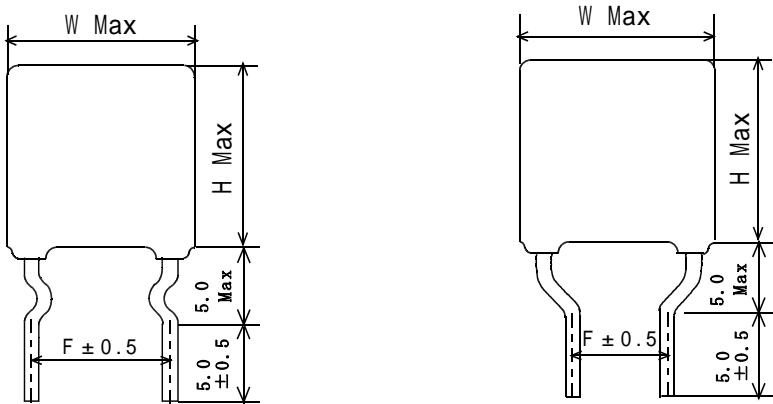
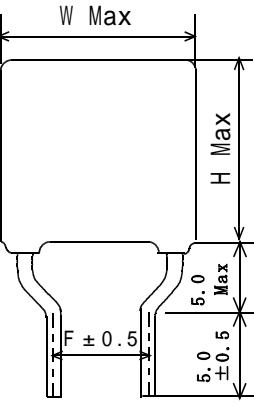
周波数に対する許容電流特性（正弦波）

CHARACTERISTICS OF PERMISSIBLE CURRENT TO FREQUENCY (SINUSOIDAL WAVE)



許容ピーク電流値 (パルス電流) Permissible Peak Current (Pulse Current)

Type MMC

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC
		P S C 3 0 5 0 0 0
Drawing of direction		
<ul style="list-style-type: none"> MMC : Straight lead type 		
<ul style="list-style-type: none"> MMC C : Cutted lead type 		
<p>※ 2.0mmMax, when dimension of H are more than 20mm.</p> <p>※※ 1000, 1250V. DC : P±1.5mm</p>		
<ul style="list-style-type: none"> MMC F : シングルフォーミング <p>《Type A》</p>  <p>《Type B》</p> 		
<p>※※※ 1000, 1250V. DC : F±0.8mm</p>		

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR								SPEC								
									P S C 3 0 5 0 0 0								
MMC, MMCF, MMCC-100V.DC																	
Parts	Capacitance (μ F)	Dimensions (mm)															
		W	H	T	P	F	F	F	d								
MMC 0100 3330000	0.033	9.5	5.5	3.5	7.5	5.0	A	7.5	A								
MMC 0100 3930000	0.039	"	"	"	"	"	"	"	"								
MMC 0100 4730000	0.047	"	"	"	"	"	"	"	"								
MMC 0100 5630000	0.056	"	"	"	"	"	"	"	"								
MMC 0100 6830000	0.068	"	"	"	"	"	"	"	"								
MMC 0100 8230000	0.082	"	"	"	"	"	"	"	"								
MMC 0100 1040000	0.10	10.0	7.0	3.8	"	"	"	"	"								
MMC 0100 1240000	0.12	"	7.5	"	"	"	"	"	"								
MMC 0100 1540000	0.15	"	8.0	4.0	"	"	"	"	"								
MMC 0100 1840000	0.18	"	"	4.3	"	"	"	"	"								
MMC 0100 2240000	0.22	"	"	4.5	"	"	"	"	"								
MMC 0100 2740000	0.27	"	9.8	"	"	"	"	"	"								
MMC 0100 3340000	0.33	"	11.0	"	"	"	"	"	"								
MMC 0100 3940000	0.39	"	11.5	5.0	"	"	"	"	"								
MMC 0100 4740000	0.47	"	12.0	5.3	"	"	"	"	"								
MMC 0100 5640000	0.56	12.5	10.5	"	10.0	"	B	"	10.0								
MMC 0100 6840000	0.68	"	"	6.4	"	"	"	"	"								
MMC 0100 8240000	0.82	"	13.5	5.7	"	"	"	"	"								
MMC 0100 1050000	1.0	"	14.0	6.0	"	"	"	"	"								
MMC 0100 1250000	1.2	18.0	12.0	5.5	15.0	"	"	B	15.0								
MMC 0100 1550000	1.5	"	13.0	6.0	"	"	"	"	"								
MMC 0100 1850000	1.8	"	13.5	6.5	"	"	"	"	"								
MMC 0100 2250000	2.2	"	14.0	7.3	"	"	"	"	"								
MMC 0100 2750000	2.7	25.0	13.5	6.5	22.5				22.5								
MMC 0100 3350000	3.3	"	15.0	7.0	"				"								
MMC 0100 3950000	3.9	"	16.0	7.5	"				"								
MMC 0100 4750000	4.7	"	17.0	8.0	"				"								

Tinned copper-covered steel wire

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR							SPEC								
									P S C 3 0 5 0 0 0							
MMC, MMCF, MMCC-250V.DC																
Parts No.	Capacitance (μ F)	Dimensions (mm)														
		W	H	T	P	F	F	F	d							
MMC 0250 1020000	0.0010	10.3	7.0	4.0	7.5	5.0	A	7.5	A							
MMC 0250 1220000	0.0012	"	"	"	"	"	"	"	"							
MMC 0250 1520000	0.0015	"	"	"	"	"	"	"	"							
MMC 0250 1820000	0.0018	"	"	"	"	"	"	"	"							
MMC 0250 2220000	0.0022	"	"	"	"	"	"	"	"							
MMC 0250 2720000	0.0027	"	"	"	"	"	"	"	"							
MMC 0250 3320000	0.0033	"	"	"	"	"	"	"	"							
MMC 0250 3920000	0.0039	"	"	"	"	"	"	"	"							
MMC 0250 4720000	0.0047	"	"	"	"	"	"	"	"							
MMC 0250 5620000	0.0056	"	"	"	"	"	"	"	"							
MMC 0250 6820000	0.0068	"	"	"	"	"	"	"	"							
MMC 0250 8220000	0.0082	"	"	"	"	"	"	"	"							
MMC 0250 1030000	0.010	"	7.4	4.3	"	"	"	"	"							
MMC 0250 1230000	0.012	"	"	4.4	"	"	"	"	"							
MMC 0250 1530000	0.015	"	7.5	"	"	"	"	"	"							
MMC 0250 1830000	0.018	"	"	"	"	"	"	"	"							
MMC 0250 2230000	0.022	"	"	"	"	"	"	"	"							
MMC 0250 2730000	0.027	"	"	"	"	"	"	"	"							
MMC 0250 3330000	0.033	"	"	"	"	"	"	"	"							
MMC 0250 3930000	0.039	"	"	4.5	"	"	"	"	"							
MMC 0250 4730000	0.047	"	7.9	4.4	"	"	"	"	"							
MMC 0250 5630000	0.056	"	"	4.8	"	"	"	"	"							
MMC 0250 6830000	0.068	"	7.5	4.5	"	"	"	"	"							
MMC 0250 8230000	0.082	"	8.0	4.8	"	"	"	"	"							
MMC 0250 1040000	0.10	"	8.4	5.8	"	"	"	"	"							
MMC 0250 1240000	0.12	"	9.0	6.0	"	"	"	"	"							
MMC 0250 1540000	0.15	"	10.8	"	"	"	"	"	"							
MMC 0250 1840000	0.18	12.5	10.0	5.0	10.0	"	B	"	10.0 A							
MMC 0250 2240000	0.22	"	10.3	5.5	"	"	"	"	"							
MMC 0250 2740000	0.27	"	11.0	6.0	"	"	"	"	"							
MMC 0250 3340000	0.33	"	11.5	6.5	"	"	"	"	"							
MMC 0250 3940000	0.39	18.0	12.0	4.9	15.0	"	"	B	15.0 "							
MMC 0250 4740000	0.47	"	12.5	5.3	"	"	"	"	"							
MMC 0250 5640000	0.56	"	13.0	5.5	"	"	"	"	"							
MMC 0250 6840000	0.68	"	13.5	6.0	"	"	"	"	"							
MMC 0250 8240000	0.82	"	14.5	6.5	"	"	"	"	"							
MMC 0250 9040000	0.90	"	"	7.0	"	"	"	"	"							

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR						SPEC					
MMC, MMCF, MMCC-250V.DC												
Parts No.	Capacitance (μ F)	Dimensions (mm)										
		W	H	T	P	F	F	F	d			
MMC 0250 1050000	1.0	18.0	15.0	7.4	15.0	5.0	B	7.5	B	15.0	A	0.8
MMC 0250 1250000	1.2	"	15.9	8.0	"	"	"	"	"	"	"	"
MMC 0250 1550000	1.5	"	16.8	9.0	"			"	"	"	"	"
MMC 0250 1850000	1.8	25.0	15.5	7.5	22.5					22.5	"	"
MMC 0250 2250000	2.2	"	16.3	8.5	"			"	"	"	"	"
MMC 0250 2750000	2.7	"	17.1	9.4	"			"	"	"	"	"
MMC 0250 3350000	3.3	"	18.0	10.3	"			"	"	"	"	"
MMC 0250 3950000	3.9	"	20.5	11.0	"			"	"	"	"	"
MMC 0250 4750000	4.7	"	21.5	12.0	"			"	"	"	"	"
MMC 0250 5650000	5.6	30.0	21.0	11.8	27.5					27.5	"	"
MMC 0250 6850000	6.8	"	22.4	13.0	"			"	"	"	"	"
MMC 0250 8250000	8.2	"	23.5	14.3	"			"	"	"	"	"
MMC 0250 1060000	10.0	"	25.8	15.9	"			"	"	"	"	"

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR							SPEC							
								P S C 3 0 5 0 0 0							
MMC, MMCF, MMCC-400V.DC															
Parts No.	Capacitance (μ F)	Dimensions (mm)													
		W	H	T	P	F	F	F							
MMC 0400 1020000	0.0010	10.3	7.0	4.0	7.5	5.0	A	7.5							
MMC 0400 1220000	0.0012	"	"	"	"	"	"	"							
MMC 0400 1520000	0.0015	"	"	"	"	"	"	"							
MMC 0400 1820000	0.0018	"	"	"	"	"	"	"							
MMC 0400 2220000	0.0022	"	"	"	"	"	"	"							
MMC 0400 2720000	0.0027	"	"	"	"	"	"	"							
MMC 0400 3320000	0.0033	"	"	"	"	"	"	"							
MMC 0400 3920000	0.0039	"	"	"	"	"	"	"							
MMC 0400 4720000	0.0047	"	"	"	"	"	"	"							
MMC 0400 5620000	0.0056	"	"	"	"	"	"	"							
MMC 0400 6820000	0.0068	"	"	"	"	"	"	"							
MMC 0400 8220000	0.0082	"	"	"	"	"	"	"							
MMC 0400 1030000	0.010	"	7.6	4.4	"	"	"	"							
MMC 0400 1230000	0.012	"	7.8	"	"	"	"	"							
MMC 0400 1530000	0.015	"	"	"	"	"	"	"							
MMC 0400 1830000	0.018	"	7.6	"	"	"	"	"							
MMC 0400 2230000	0.022	"	7.9	4.5	"	"	"	"							
MMC 0400 2730000	0.027	"	8.2	4.8	"	"	"	"							
MMC 0400 3330000	0.033	"	9.0	5.5	"	"	"	"							
MMC 0400 3930000	0.039	12.5	8.0	4.9	10.0	"	B	"							
MMC 0400 4730000	0.047	"	8.3	5.2	"	"	"	"							
MMC 0400 5630000	0.056	"	10.0	"	"	"	"	"							
MMC 0400 6830000	0.068	"	10.5	5.5	"	"	"	"							
MMC 0400 8230000	0.082	"	11.0	6.0	"	"	"	"							
MMC 0400 1040000	0.10	"	12.0	"	"	"	"	"							
MMC 0400 1240000	0.12	18.0	10.2	5.5	15.0	"	"	B							
MMC 0400 1540000	0.15	"	12.0	"	"	"	"	"							
MMC 0400 1840000	0.18	"	12.5	6.0	"	"	"	"							
MMC 0400 2240000	0.22	"	13.0	6.5	"	"	"	"							
MMC 0400 2740000	0.27	"	13.5	7.0	"	"	"	"							
MMC 0400 3340000	0.33	"	14.0	7.7	"	"	"	"							
MMC 0400 3940000	0.39	"	15.0	8.5	"	"	"	"							
MMC 0400 4740000	0.47	"	16.5	"	"	"	"	"							
MMC 0400 5640000	0.56	25.0	15.3	7.5	22.5			22.5							
MMC 0400 6840000	0.68	"	16.0	8.2	"			"							
MMC 0400 8240000	0.82	"	16.8	9.0	"			"							

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR						SPEC		
MMC, MMCF, MMCC-400V.DC									
Parts No.	Capacitance (μ F)	Dimensions (mm)							
		W	H	T	P	F	F	F	
MMC 0400 1050000	1.0	25.0	17.7	10.0	22.5			22.5	
MMC 0400 1250000	1.2	"	18.8	11.0	"			"	
MMC 0400 1550000	1.5	30.0	19.5	10.0	27.5			27.5	
MMC 0400 1850000	1.8	"	18.7	9.3	"			"	
MMC 0400 2250000	2.2	"	19.8	10.4	"			"	
MMC 0400 2750000	2.7	"	21.0	11.6	"			"	
MMC 0400 3350000	3.3	"	22.3	13.0	"			"	
MMC 0400 3950000	3.9	"	23.6	14.2	"			"	
MMC 0400 4750000	4.7	"	25.2	15.8	"			"	

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR							SPEC							
								P S C 3 0 5 0 0 0							
MMC, MMCF, MMCC-450V.DC															
Parts No.	Capacitance (μ F)	Dimensions (mm)													
		W	H	T	P	F	F	F							
MMC 0450 1020000	0.0010	10.3	7.0	4.0	7.5	5.0	A	7.5							
MMC 0450 1220000	0.0012	"	"	"	"	"	"	"							
MMC 0450 1520000	0.0015	"	"	"	"	"	"	"							
MMC 0450 1820000	0.0018	"	"	"	"	"	"	"							
MMC 0450 2220000	0.0022	"	"	"	"	"	"	"							
MMC 0450 2720000	0.0027	"	"	"	"	"	"	"							
MMC 0450 3320000	0.0033	"	"	"	"	"	"	"							
MMC 0450 3920000	0.0039	"	"	"	"	"	"	"							
MMC 0450 4720000	0.0047	"	"	"	"	"	"	"							
MMC 0450 5620000	0.0056	"	"	"	"	"	"	"							
MMC 0450 6820000	0.0068	"	"	"	"	"	"	"							
MMC 0450 8220000	0.0082	"	"	"	"	"	"	"							
MMC 0450 1030000	0.010	"	7.6	4.4	"	"	"	"							
MMC 0450 1230000	0.012	"	7.8	"	"	"	"	"							
MMC 0450 1530000	0.015	"	"	"	"	"	"	"							
MMC 0450 1830000	0.018	"	7.6	"	"	"	"	"							
MMC 0450 2230000	0.022	"	7.9	4.5	"	"	"	"							
MMC 0450 2730000	0.027	"	8.2	4.8	"	"	"	"							
MMC 0450 3330000	0.033	"	9.0	5.5	"	"	"	"							
MMC 0450 3930000	0.039	12.5	8.0	4.9	10.0	"	B	"							
MMC 0450 4730000	0.047	"	8.3	5.2	"	"	"	"							
MMC 0450 5630000	0.056	"	10.0	"	"	"	"	"							
MMC 0450 6830000	0.068	"	10.5	5.5	"	"	"	"							
MMC 0450 8230000	0.082	"	11.0	6.0	"	"	"	"							
MMC 0450 1040000	0.10	"	12.0	"	"	"	"	"							
MMC 0450 1240000	0.12	18.0	10.2	5.5	15.0	"	"	B							
MMC 0450 1540000	0.15	"	12.0	"	"	"	"	"							
MMC 0450 1840000	0.18	"	12.5	6.0	"	"	"	15.0							
MMC 0450 2240000	0.22	"	13.0	6.5	"	"	"	"							
MMC 0450 2740000	0.27	"	13.5	7.0	"	"	"	"							
MMC 0450 3340000	0.33	"	14.0	7.7	"	"	"	"							
MMC 0450 3940000	0.39	"	15.0	8.5	"	"	"	"							
MMC 0450 4740000	0.47	"	16.5	"	"	"	"	"							
MMC 0450 5640000	0.56	25.0	15.3	7.5	22.5			22.5							
MMC 0450 6840000	0.68	"	16.0	8.2	"			"							
MMC 0450 8240000	0.82	"	16.8	9.0	"			"							

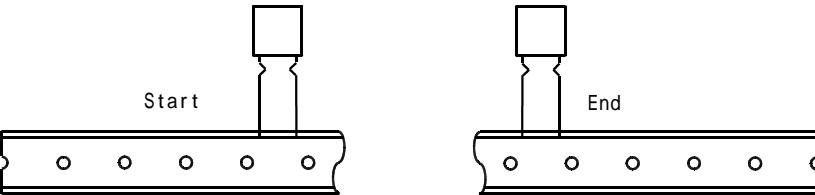


SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR						SPEC		
MMC, MMCF, MMCC-450V.DC									
Parts No.	Capacitance (μ F)	Dimensions (mm)							
		W	H	T	P	F	F	d	
MMC 0450 1050000	1.0	25.0	17.7	10.0	22.5			22.5 A 0.8	
MMC 0450 1250000	1.2	"	18.8	11.0	"			" "	
MMC 0450 1550000	1.5	30.0	19.5	10.0	27.5			27.5 "	
MMC 0450 1850000	1.8	"	21.5	11.0	"			" "	
MMC 0450 2250000	2.2	"	23.0	12.5	"			" "	
MMC 0450 2750000	2.7	"	25.0	14.0	"			" "	
MMC 0450 3350000	3.3	"	26.5	15.5	"			" "	

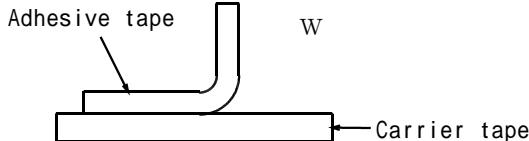

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR							SPEC								
									P S C 3 0 5 0 0 0							
MMC, MMCF, MMCC-630V.DC																
Parts No.	Capacitance (μ F)	Dimensions (mm)														
		W	H	T	P	F	F	F	d							
MMC 0630 1020000	0.0010	10.3	7.5	4.5	7.5	5.0	A	7.5	A							
MMC 0630 1220000	0.0012	"	"	"	"	"	"	"	"							
MMC 0630 1520000	0.0015	"	"	"	"	"	"	"	"							
MMC 0630 1820000	0.0018	"	"	"	"	"	"	"	"							
MMC 0630 2220000	0.0022	"	"	"	"	"	"	"	"							
MMC 0630 2720000	0.0027	"	"	"	"	"	"	"	"							
MMC 0630 3320000	0.0033	"	"	"	"	"	"	"	"							
MMC 0630 3920000	0.0039	"	"	"	"	"	"	"	"							
MMC 0630 4720000	0.0047	"	"	"	"	"	"	"	"							
MMC 0630 5620000	0.0056	"	"	"	"	"	"	"	"							
MMC 0630 6820000	0.0068	"	"	"	"	"	"	"	"							
MMC 0630 8220000	0.0082	"	"	"	"	"	"	"	"							
MMC 0630 1030000	0.010	12.5	"	4.0	10.0	"	B	"	10.0							
MMC 0630 1230000	0.012	"	"	4.5	"	"	"	"	"							
MMC 0630 1530000	0.015	"	8.2	5.0	"	"	"	"	"							
MMC 0630 1830000	0.018	"	10.0	"	"	"	"	"	"							
MMC 0630 2230000	0.022	"	10.5	5.3	"	"	"	"	"							
MMC 0630 2730000	0.027	"	"	5.5	"	"	"	"	"							
MMC 0630 3330000	0.033	"	11.0	6.0	"	"	"	"	"							
MMC 0630 3930000	0.039	"	12.5	"	"	"	"	"	"							
MMC 0630 4730000	0.047	"	13.0	6.5	"	"	"	"	"							
MMC 0630 5630000	0.056	18.0	10.5	5.5	15.0	"	"	B	15.0							
MMC 0630 6830000	0.068	"	11.0	6.0	"	"	"	"	"							
MMC 0630 8230000	0.082	"	11.5	6.5	"	"	"	"	"							
MMC 0630 1040000	0.10	"	13.0	"	"	"	"	"	"							
MMC 0630 1240000	0.12	"	13.5	7.0	"	"	"	"	"							
MMC 0630 1540000	0.15	"	14.5	8.0	"	"	"	"	"							
MMC 0630 1840000	0.18	"	16.0	"	"	"	"	"	"							
MMC 0630 2240000	0.22	"	16.5	9.0	"	"	"	"	"							
MMC 0630 2740000	0.27	25.0	16.8	7.5	22.5				22.5							
MMC 0630 3340000	0.33	"	17.5	8.0	"			"	"							
MMC 0630 3940000	0.39	"	18.0	8.7	"			"	"							
MMC 0630 4740000	0.47	"	19.0	9.5	"			"	"							
MMC 0630 5640000	0.56	"	20.0	10.5	"			"	"							
MMC 0630 6840000	0.68	"	21.5	11.5	"			"	"							
MMC 0630 8240000	0.82	30.0	20.0	10.5	27.5				27.5							

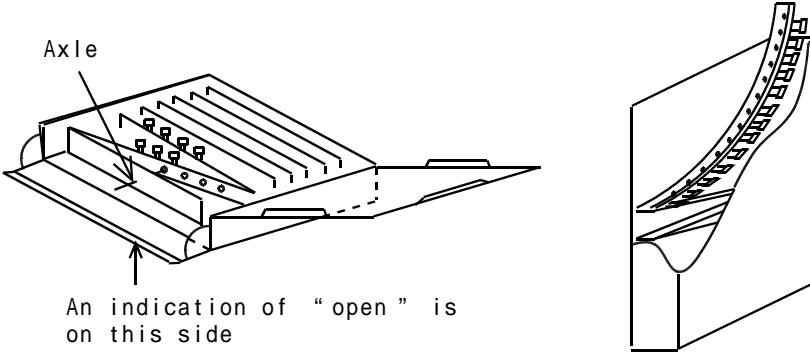
SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR						SPEC																																																																			
									P S C 3 0 5 0 0 0																																																																	
MMC, MMCF, MMCC-630V.DC																																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Parts No.</th> <th rowspan="2">Capacitance (μ F)</th> <th colspan="7">Dimensions (mm)</th> <th rowspan="2">d</th> </tr> <tr> <th>W</th> <th>H</th> <th>T</th> <th>P</th> <th>F</th> <th>F</th> <th>F</th> </tr> </thead> <tbody> <tr> <td>MMC 0630 1050000</td> <td>1.0</td> <td>30.0</td> <td>21.0</td> <td>11.5</td> <td>27.5</td> <td></td> <td></td> <td>27.5</td> <td>A 0.8</td> </tr> <tr> <td>MMC 0630 1250000</td> <td>1.2</td> <td>"</td> <td>22.0</td> <td>12.5</td> <td>"</td> <td></td> <td></td> <td>"</td> <td>"</td> </tr> <tr> <td>MMC 0630 1550000</td> <td>1.5</td> <td>"</td> <td>24.0</td> <td>14.3</td> <td>"</td> <td></td> <td></td> <td>"</td> <td>"</td> </tr> <tr> <td>MMC 0630 1850000</td> <td>1.8</td> <td>"</td> <td>25.5</td> <td>15.5</td> <td>"</td> <td></td> <td></td> <td>"</td> <td>"</td> </tr> <tr> <td>MMC 0630 2250000</td> <td>2.2</td> <td>"</td> <td>27.3</td> <td>17.5</td> <td>"</td> <td></td> <td></td> <td>"</td> <td>"</td> </tr> </tbody> </table>								Parts No.	Capacitance (μ F)	Dimensions (mm)							d	W	H	T	P	F	F	F	MMC 0630 1050000	1.0	30.0	21.0	11.5	27.5			27.5	A 0.8	MMC 0630 1250000	1.2	"	22.0	12.5	"			"	"	MMC 0630 1550000	1.5	"	24.0	14.3	"			"	"	MMC 0630 1850000	1.8	"	25.5	15.5	"			"	"	MMC 0630 2250000	2.2	"	27.3	17.5	"			"	"
Parts No.	Capacitance (μ F)	Dimensions (mm)								d																																																																
		W	H	T	P	F	F	F																																																																		
MMC 0630 1050000	1.0	30.0	21.0	11.5	27.5			27.5	A 0.8																																																																	
MMC 0630 1250000	1.2	"	22.0	12.5	"			"	"																																																																	
MMC 0630 1550000	1.5	"	24.0	14.3	"			"	"																																																																	
MMC 0630 1850000	1.8	"	25.5	15.5	"			"	"																																																																	
MMC 0630 2250000	2.2	"	27.3	17.5	"			"	"																																																																	

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR						SPEC						
							P S C 3 0 5 0 0 0						
MMC, MMCF, MMCC-1000V.DC													
Dimensions (mm)													
Parts No.	Capacitance (μ F)												
		W	H	T	P	F	d						
MMC 1000 1020000	0.0010	15.5	11.0	6.0	12.5	10.0	A 0.6						
MMC 1000 1220000	0.0012	"	"	"	"	"	"						
MMC 1000 1520000	0.0015	"	"	"	"	"	"						
MMC 1000 1820000	0.0018	"	"	"	"	"	"						
MMC 1000 2220000	0.0022	"	11.5	"	"	"	"						
MMC 1000 2720000	0.0027	"	12.0	6.5	"	"	"						
MMC 1000 3320000	0.0033	"	11.5	6.0	"	"	"						
MMC 1000 3920000	0.0039	"	12.0	6.5	"	"	"						
MMC 1000 4720000	0.0047	"	12.5	7.0	"	"	"						
MMC 1000 5620000	0.0056	"	13.0	7.5	"	"	"						
MMC 1000 6820000	0.0068	"	11.0	6.0	"	"	"						
MMC 1000 8220000	0.0082	"	"	"	"	12.5	"						
MMC 1000 1030000	0.010	"	"	"	"	"	"						
MMC 1000 1230000	0.012	"	12.0	"	"	"	"						
MMC 1000 1530000	0.015	"	12.5	7.0	"	"	"						
MMC 1000 1830000	0.018	"	13.0	7.5	"	"	0.8						
MMC 1000 2230000	0.022	"	15.5	"	"	"	"						
MMC 1000 2730000	0.027	21.0	13.0	6.0	17.5	"	B "						
MMC 1000 3330000	0.033	"	14.0	6.5	"	"	"						
MMC 1000 3930000	0.039	"	14.5	7.0	"	"	"						
MMC 1000 4730000	0.047	"	15.5	7.5	"	"	"						
MMC 1000 5630000	0.056	"	17.0	"	"	"	"						
MMC 1000 6830000	0.068	"	18.0	8.5	"	"	"						
MMC 1000 8230000	0.082	"	18.5	9.0	"	"	"						
MMC 1000 1040000	0.10	"	20.0	10.0	"	"	"						
MMC 1000 1240000	0.12	26.0	18.5	9.0	22.5	17.5	"						
MMC 1000 1540000	0.15	"	20.0	10.0	"	"	"						
MMC 1000 1840000	0.18	"	22.0	10.5	"	"	"						
MMC 1000 2240000	0.22	"	23.0	12.0	"	"	"						
MMC 1000 2740000	0.27	"	25.0	13.5	"	"	"						
MMC 1000 3340000	0.33	31.0	24.0	13.0	27.5	22.5	"						
MMC 1000 3940000	0.39	"	26.0	14.0	"	"	"						
MMC 1000 4740000	0.47	"	27.5	15.5	"	"	"						

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR						SPEC						
							P S C 3 0 5 0 0 0						
MMC, MMCF, MMCC-1250V.DC													
Parts No.													
Parts No.	Capacitance (μ F)	Dimensions (mm)											
		W	H	T	P	F	d						
MMC 1250 1020000	0.0010	15.5	11.0	6.0	12.5	10.0	A 0.6						
MMC 1250 1220000	0.0012	"	"	"	"	"	"						
MMC 1250 1520000	0.0015	"	"	"	"	"	"						
MMC 1250 1820000	0.0018	"	"	"	"	"	"						
MMC 1250 2220000	0.0022	"	11.5	"	"	"	"						
MMC 1250 2720000	0.0027	"	12.0	6.5	"	"	"						
MMC 1250 3320000	0.0033	"	11.5	6.0	"	"	"						
MMC 1250 3920000	0.0039	"	12.0	6.5	"	"	"						
MMC 1250 4720000	0.0047	"	12.5	7.0	"	"	"						
MMC 1250 5620000	0.0056	"	13.0	7.5	"	"	"						
MMC 1250 6820000	0.0068	"	15.0	"	"	"	"						
MMC 1250 8220000	0.0082	21.0	12.0	5.0	17.5	12.5	B "						
MMC 1250 1030000	0.010	"	12.5	"	"	"	"						
MMC 1250 1230000	0.012	"	13.0	5.5	"	"	"						
MMC 1250 1530000	0.015	"	13.5	6.0	"	"	"						
MMC 1250 1830000	0.018	"	14.5	6.5	"	"	0.8						
MMC 1250 2230000	0.022	"	15.0	7.0	"	"	"						
MMC 1250 2730000	0.027	26.0	15.5	6.0	22.5	17.5	B "						
MMC 1250 3330000	0.033	"	16.0	6.5	"	"	"						
MMC 1250 3930000	0.039	"	16.5	7.0	"	"	"						
MMC 1250 4730000	0.047	"	17.0	8.0	"	"	"						
MMC 1250 5630000	0.056	31.0	"	7.5	27.5	22.5	"						
MMC 1250 6830000	0.068	"	17.5	8.0	"	"	"						
MMC 1250 8230000	0.082	"	18.5	9.0	"	"	"						
MMC 1250 1040000	0.10	"	19.5	10.0	"	"	"						
MMC 1250 1240000	0.12	"	20.5	11.5	"	"	"						
MMC 1250 1540000	0.15	"	23.0	12.0	"	"	"						
MMC 1250 1840000	0.18	"	24.5	13.0	"	"	"						
MMC 1250 2240000	0.22	"	26.5	14.5	"	"	"						

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITORS	SPEC																																				
		P S C 3 0 5 0 0 0																																				
SPECIFICATION OF TAPING FOR AUTOMATIC INSERTION (Type MMCV)																																						
1. SCOPE																																						
This specification applies to the taping dimensions and performance required for film capacitors used in the automatic radial insertion system.																																						
Style of packing : Ammo pack																																						
2. TAPING DIMENSIONS																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Type</th> <th>Taping style Rated voltage</th> <th>STYLE-1</th> <th>STYLE-2</th> <th>STYLE-3</th> <th>STYLE-5</th> <th>STYLE-6</th> </tr> </thead> <tbody> <tr> <td rowspan="5">MMC V</td><td>100V. DC</td><td>333~474</td><td>564~105</td><td>125~225</td><td>564~105</td><td>125~225</td></tr> <tr> <td>250V. DC</td><td>102~154</td><td>184~334</td><td>394~125</td><td>184~334</td><td>394~155</td></tr> <tr> <td>400V. DC</td><td>102~333</td><td>393~104</td><td>124~474</td><td>393~104</td><td>124~474</td></tr> <tr> <td>450V. DC</td><td>102~333</td><td>393~104</td><td>124~474</td><td>393~104</td><td>124~474</td></tr> <tr> <td>630V. DC</td><td>102~822</td><td>103~473</td><td>563~224</td><td>103~473</td><td>563~224</td></tr> </tbody> </table>	Type	Taping style Rated voltage	STYLE-1	STYLE-2	STYLE-3	STYLE-5	STYLE-6	MMC V	100V. DC	333~474	564~105	125~225	564~105	125~225	250V. DC	102~154	184~334	394~125	184~334	394~155	400V. DC	102~333	393~104	124~474	393~104	124~474	450V. DC	102~333	393~104	124~474	393~104	124~474	630V. DC	102~822	103~473	563~224	103~473	563~224
Type	Taping style Rated voltage	STYLE-1	STYLE-2	STYLE-3	STYLE-5	STYLE-6																																
MMC V	100V. DC	333~474	564~105	125~225	564~105	125~225																																
	250V. DC	102~154	184~334	394~125	184~334	394~155																																
	400V. DC	102~333	393~104	124~474	393~104	124~474																																
	450V. DC	102~333	393~104	124~474	393~104	124~474																																
	630V. DC	102~822	103~473	563~224	103~473	563~224																																
3. TAPING PERFORMANCE (to be satisfied with the following point)																																						
3-1. Appearance : To be no damages or cracks on components and the tape.																																						
3-2. Missing components : A maximum of 3 consecutive components may be missing.																																						
3-3. Tip of the tape : To leave the blank tape more than 4.5 feed hole pitch from the start, and the end of the tape.																																						
																																						
3-4. Tape splicing : Tape splicing may be done with (1) or (2).																																						
(1) The carrier tape (include hold-down tape) shall be cut at the center of hole and hole, and spliced with tape.																																						
(2) The carrier tape (include hold down tape) shall be cut at the center of hole, and spliced with splicing tape.																																						
																																						

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC PSC305000																
3-5. Adhesive strength : When pulling an adhesive tape in W direction (upward) using a push-and-pull scale, adhesive strength shall be 3N or more																		
																		
3-6. Tensile test : When pulling a test sample by the force 10N, there shall be no gaps or breakdowns.																		
																		
3-7. Moisture resistance : A taped test sample shall be left in a chamber with a temperature of 40°C and RH95% for 96 hours. Then after being left for one hour at room temperature the test sample shall be submitted to a tensile test of item 3.6.																		
3-8. Temperature cycling test : A test sample shall be submitted to 5 cycles of temperature cycling test. One cycle consists of : 2 hours at -40°C 2 hours at +85°C Then after being left for one hour at room temperature, the test sample shall be submitted to a tensile test of item 3.6.																		
4. BOX DIMENSIONS																		
(Unit : mm)																		
<table border="1"> <thead> <tr> <th>Type</th> <th>A</th> <th>B</th> <th>T</th> </tr> </thead> <tbody> <tr> <td>c</td> <td>330 ± 7</td> <td>330 ± 7</td> <td>45 ± 5</td> </tr> <tr> <td>d</td> <td>330 ± 7</td> <td>330 ± 7</td> <td>50 ± 5</td> </tr> <tr> <td>e</td> <td>330 ± 7</td> <td>330 ± 7</td> <td>55 ± 5</td> </tr> </tbody> </table>			Type	A	B	T	c	330 ± 7	330 ± 7	45 ± 5	d	330 ± 7	330 ± 7	50 ± 5	e	330 ± 7	330 ± 7	55 ± 5
Type	A	B	T															
c	330 ± 7	330 ± 7	45 ± 5															
d	330 ± 7	330 ± 7	50 ± 5															
e	330 ± 7	330 ± 7	55 ± 5															

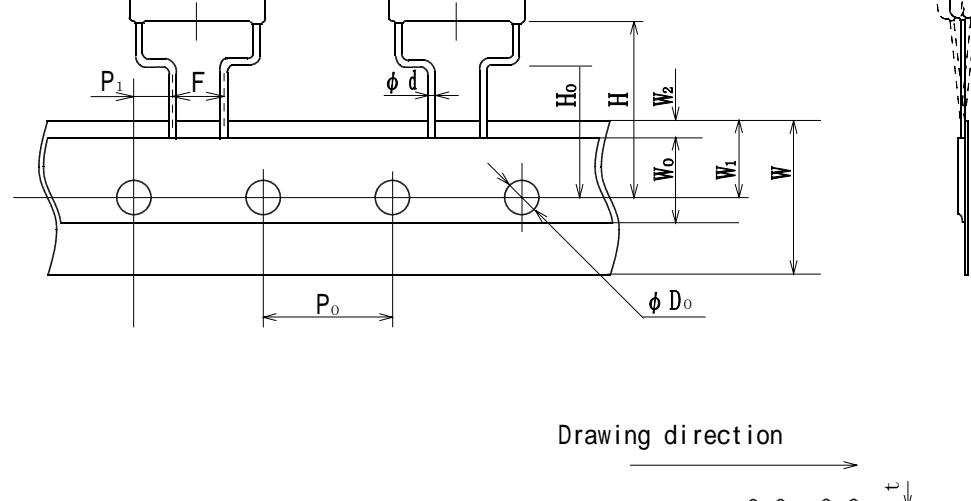
SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC PSC305000																												
5. STYLE OF PACKING (Ammo pack)																														
5-1. Packaging																														
<ul style="list-style-type: none"> * Fold the tape in the cardboard box, with hold-down tape turning up against an outlet opening. * Thread the feed hole with a axle and fix the tape. 																														
																														
5-2. Marking																														
The following particulars shall be labelled on the surface of a box.																														
Example)																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="5" style="padding: 2px;">CODE CUSTOMER</td> <td style="padding: 2px;">INSP DATE</td> <td style="padding: 2px;">PKG NO</td> </tr> <tr> <td colspan="5" style="padding: 2px;">PARTS NO</td> <td style="padding: 2px;">MACH NO</td> <td style="padding: 2px;">QTY/PKG</td> </tr> <tr> <td colspan="2" style="padding: 2px;">ORDER NO</td> <td style="padding: 2px;">LOT NO</td> <td style="padding: 2px;">(5)</td> <td style="padding: 2px;">(6)</td> <td style="padding: 2px;">ROHS</td> <td style="padding: 2px;">(7)</td> </tr> <tr> <td style="padding: 2px;">TYPE</td> <td style="padding: 2px;">WV</td> <td style="padding: 2px;">TOL</td> <td style="padding: 2px;">CAP</td> <td style="padding: 2px;">EDP CODE</td> <td colspan="2" style="padding: 2px;">QT (PCS)</td> </tr> </table>			CODE CUSTOMER					INSP DATE	PKG NO	PARTS NO					MACH NO	QTY/PKG	ORDER NO		LOT NO	(5)	(6)	ROHS	(7)	TYPE	WV	TOL	CAP	EDP CODE	QT (PCS)	
CODE CUSTOMER					INSP DATE	PKG NO																								
PARTS NO					MACH NO	QTY/PKG																								
ORDER NO		LOT NO	(5)	(6)	ROHS	(7)																								
TYPE	WV	TOL	CAP	EDP CODE	QT (PCS)																									
CODE CUSTOMER	MACH NO	PRODUCTION COUNTRY	TOL(%)																											
INSP DATE	ORDER NO	TYPE	CAP																											
PARTS NO	LOT NO	W V	EDP CODE																											
			QT(PCS)																											

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR								SPEC					
									P S C 3 0 5 0 0 0					
Type MMC V	333 ~ 474		100V. DC											
S T Y L E - 1	102 ~ 154		250V. DC											
(0 2 0 0)	102 ~ 333		400V. DC											
	102 ~ 333		450V. DC											
	102 ~ 822		630V. DC											
Drawing direction →														
(Unit : mm)														
P	P _o	(1) P ₁	P ₂	d	(1) F	(2) h	W	W _o	W ₁	(3) W ₂	H	(1) H _o	D _o	t
12.7	12.7	3.85	6.35	0.5 or 0.6	5.0	0	18.0	5.0	9.0	3.0 Max	21.25 Max	16.0	4.0	0.7
± 1.0	± 0.3	± 0.7	± 1.3	± 0.05	+0.8 -0.2	± 2.0	+1.0 -0.5	—	± 0.5	—	—	± 0.5	± 0.2	± 0.2

- (1) To be measured under the clinch-position.
- (2) To be measured the top of component.
- (3) Hold-down tape is not to exceed over the carrier tape.

SPECIFICATION		METALLIZED POLYESTER FILM CAPACITOR										SPEC		
												P S C 3 0 5 0 0 0		
Type	MMC V	564	~	105		100V. DC								
S T Y L E - 2		184	~	334		250V. DC								
(D 2 0 0)		393	~	104		400V. DC								
		393	~	104		450V. DC								
		103	~	473		630V. DC								
(Unit : mm)														
P	P ₀	(1) P ₁	P ₂	d	(1) F	(2) h	W	W ₀	W ₁	(3) W ₂	H	(1) H ₀	D ₀	t
15.0	15.0	5.0	7.5	0.6 or 0.8	5.0	0	18.0	5.0	9.0	3.0 Max	22.0 Max	16.0	4.0	0.7
±1.0	±0.3	±0.7	±1.3	±0.05	±0.8	±2.0	±1.0	—	±0.5	—	—	±0.5	±0.2	±0.2

(1) To be measured under the clinch-position.
 (2) To be measured the top of component.
 (3) Hold-down tape is not to exceed over the carrier tape.

SPECIFICATION		METALLIZED POLYESTER FILM CAPACITOR										SPEC		
												P S C 3 0 5 0 0 0		
Type	MMC V	125	~	225	100V. DC									
S T Y L E - 3		394	~	125	250V. DC									
(D 2 1 0)		124	~	474	400V. DC									
		124	~	474	450V. DC									
		563	~	224	630V. DC									
														
(Unit : mm)														
P	P _o	(1) P ₁	P ₂	d	(1) F	(2) h	W	W _o	W ₁	(3) W ₂	H	(1) H _o	D _o	t
25.4	12.7	3.85	6.35	0.6 or 0.8	5.0	0	18.0	5.0	9.0	3.0 Max	22.0 Max	16.0	4.0	0.7
±1.0	±0.3	±0.7	±1.3	±0.05	±0.8 -0.2	±2.0	±1.0 -0.5	—	±0.5	—	—	±0.5	±0.2	±0.2

(1) To be measured under the clinch-position.
 (2) To be measured the top of component.
 (3) Hold-down tape is not to exceed over the carrier tape.

SPECIFICATION		METALLIZED POLYESTER FILM CAPACITOR										SPEC		
												P S C 3 0 5 0 0 0		
Type	MMC V	564	~	105	100V. DC									
S T Y L E - 5	(0 2 0 0)	184	~	334	250V. DC									
		393	~	104	400V. DC									
		393	~	104	450V. DC									
		103	~	473	630V. DC									
<p style="text-align: center;">Drawing direction →</p>														
(Unit : mm)														
P	P _o	(1) P ₁	P ₂	d	(1) F	(2) h	W	W _o	W _i	(3) W _z	H	(1) H _o	D _o	t
15.0	15.0	3.75	7.5	0.6 or 0.8	7.5	0	18.0	5.0	9.0	3.0 Max	22.0 Max	16.0	4.0	0.7
±1.0	±0.3	±0.7	±1.3	±0.05	±0.8	±2.0	±1.0	—	±0.5	—	—	±0.5	±0.2	±0.2

(1) To be measured under the clinch-position.
 (2) To be measured the top of component.
 (3) Hold-down tape is not to exceed over the carrier tape.

SPECIFICATION		METALLIZED POLYESTER FILM CAPACITOR										SPEC		
												P S C 3 0 5 0 0 0		
Type	MMC V	125	~	225	100V. DC									
S T Y L E - 6	(0 2 0 0)	394	~	155	250V. DC									
		124	~	474	400V. DC									
		124	~	474	450V. DC									
		563	~	224	630V. DC									
(Unit : mm)														
P	P ₀	(1) P ₁	P ₂	d	(1) F	(2) h	W	W ₀	W ₁	(3) W ₂	H	(1) H ₀	D ₀	t
30.0	15.0	3.75	7.5	0.6 or 0.8	7.5	0	18.0	5.0	9.0	3.0 Max	22.0 Max	16.0	4.0	0.7
±1.0	±0.3	±0.7	±1.3	±0.05	±0.8	±2.0	±1.0	—	±0.5	—	—	±0.5	±0.2	±0.2

(1) To be measured under the clinch-position.
 (2) To be measured the top of component.
 (3) Hold-down tape is not to exceed over the carrier tape.

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR				SPEC P S C 3 0 5 0 0 0				
Packing quantity									
MMCV-100V. DC									
(Unit : pcs)									
Capacitance (μ F)	STYLE-1 (0200)	STYLE-2 (D200)	STYLE-3 (D210)	STYLE-5 (0200)	STYLE-6 (0200)				
0.033	2,000								
0.039	"								
0.047	"								
0.056	"								
0.068	"								
0.082	"								
0.10	"								
0.12	"								
0.15	"								
0.18	1,000								
0.22	"								
0.27	"								
0.33	"								
0.39	"								
0.47	"								
0.56		1,000		1,000					
0.68		500		500					
0.82		"		"					
1.0		"		"					
1.2			500		500				
1.5			"		"				
1.8			"		400				
2.2			400		"				

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR					SPEC					
						P S C 3 0 5 0 0 0					
Packing quantity											
MMCV-250V. DC											
Capacitance (μ F)	STYLE-1 (0200)	STYLE-2 (D200)	STYLE-3 (D210)	STYLE-5 (0200)	STYLE-6 (0200)	(Unit : pcs)					
0.0010	1,000										
0.0012	"										
0.0015	"										
0.0018	"										
0.0022	"										
0.0027	"										
0.0033	"										
0.0039	"										
0.0047	"										
0.0056	"										
0.0068	"										
0.0082	"										
0.010	"										
0.012	"										
0.015	"										
0.018	"										
0.022	"										
0.027	"										
0.033	"										
0.039	"										
0.047	"										
0.056	"										
0.068	"										
0.082	"										
0.10	"										
0.12	"										
0.15	"										
0.18		1,000		1,000							
0.22		"		"							
0.27		"		"							
0.33		500		500							
0.39			500		500						
0.47			"		"						
0.56			"		"						
0.68			"		"						
0.82			"		400						
0.90			"		"						
1.0			400		"						
1.2			"		"						
1.5					300						

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0
---------------	-------------------------------------	---------------------------

Packing quantity

MMCV-400V. DC (Unit : pcs)

Capacitance (μ F)	STYLE-1 (0200)	STYLE-2 (D200)	STYLE-3 (D210)	STYLE-5 (0200)	STYLE-6 (0200)
0.0010	1,000				
0.0012	"				
0.0015	"				
0.0018	"				
0.0022	"				
0.0027	"				
0.0033	"				
0.0039	"				
0.0047	"				
0.0056	"				
0.0068	"				
0.0082	"				
0.010	"				
0.012	"				
0.015	"				
0.018	"				
0.022	"				
0.027	"				
0.033	"				
0.039		1,000		1,000	
0.047		"		"	
0.056		"		"	
0.068		"		"	
0.082		"		"	
0.10		"		"	
0.12			500		500
0.15			"		"
0.18			"		"
0.22			"		400
0.27			"		"
0.33			400		300
0.39			"		"
0.47			"		"

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0
---------------	-------------------------------------	---------------------------

Packing quantity

MMCV-450V. DC (Unit : pcs)

Capacitance (μ F)	STYLE-1 (0200)	STYLE-2 (D200)	STYLE-3 (D210)	STYLE-5 (0200)	STYLE-6 (0200)
0.0010	1,000				
0.0012	"				
0.0015	"				
0.0018	"				
0.0022	"				
0.0027	"				
0.0033	"				
0.0039	"				
0.0047	"				
0.0056	"				
0.0068	"				
0.0082	"				
0.010	"				
0.012	"				
0.015	"				
0.018	"				
0.022	"				
0.027	"				
0.033	"				
0.039		1,000		1,000	
0.047		"		"	
0.056		"		"	
0.068		"		"	
0.082		"		"	
0.10		"		"	
0.12			500		500
0.15			"		"
0.18			"		"
0.22			"		400
0.27			"		"
0.33			400		300
0.39			"		"
0.47			"		"

SPECIFICATION	METALLIZED POLYESTER FILM CAPACITOR	SPEC P S C 3 0 5 0 0 0
---------------	-------------------------------------	---------------------------

Packing quantity

MMCV-630V. DC (Unit : pcs)

Capacitance (μ F)	STYLE-1 (0200)	STYLE-2 (D200)	STYLE-3 (D210)	STYLE-5 (0200)	STYLE-6 (0200)
0.0010	1,000				
0.0012	"				
0.0015	"				
0.0018	"				
0.0022	"				
0.0027	"				
0.0033	"				
0.0039	"				
0.0047	"				
0.0056	"				
0.0068	"				
0.0082	"				
0.010		1,000		1,000	
0.012		"		"	
0.015		"		"	
0.018		"		"	
0.022		"		"	
0.027		"		"	
0.033		"		"	
0.039		"		"	
0.047		500		500	
0.056			500		500
0.068			"		"
0.082			"		400
0.10			"		"
0.12			"		"
0.15			400		300
0.18			"		"
0.22			"		"



Cautions about safety In use of Capacitors

(MMC type)

Registry

HWC 305000

Rev.

0 2

Sheet

1 / 2

When using a capacitor, please use one within the range of the specified values in the specification after checking the environments of using and mounting.

If used beyond the range specified in the specification or the attached cautions, it may lead to short circuit, open, smoking and firing.

Be sure to inquire of us as to the items which are not specified in the specification or are unclear to you.

Also, in case of using capacitors for such equipment or apparatus as may possibly affect human lives like life-support systems, aircraft and automotive control system, etc., please never fail to inquire of us as to further details.

1. Operating temperature and humidity

- (1) In actual use, make sure that the operating temperature is within the range specified in the specification.
- (2) Even if the operating temperature is within the specified range, sudden change in the operating temperature may lead to cracks on the enclosure and result in deterioration of the insulation resistance or the increase in tangent of loss angle by absorbing moisture through cracks on the enclosure. Please take good care of the operating temperature.
- (3) Please avoid using a capacitor in high humidity which may lead to the condensation as much as possible.

Even if there are no cracks or damage on an enclosure, deterioration of the insulation resistance or the increase in tangent of loss angle, etc. may be caused by absorbing moisture. Therefore, please be careful when using a capacitor.

2. When using a capacitor in a circuit except a d.c. one

When using a capacitor in a circuit except a d.c. one, a capacitor shall be used below the permissible current to frequency.

When used beyond the specified values, the capacitor surface temperature may rise due to the occurrence of corona charge or self heat generation of a capacitor and it may result in a short life, the destruction of the dielectric or the lowering of the insulation resistance.

At worst smoking or firing may be led.

3. Soldering

When soldering a capacitor, heat in soldering is conducted to the inside of the capacitor through lead wires and an enclosure.

Therefore soldering at high temperature and for hours may cause deterioration of characteristics or breakdown of a capacitor.

Be sure to solder a capacitor within the range specified in the specification when soldering.

In case of soldering beyond the range recommended by us, please inquire of us as to the details in advance.

- (1) Avoid soldering over again in a short time.

When dipping again in order to correct, dipping must be applied after the temperature of a capacitor comes down to a room temperature and within twice.

- (2) Avoid any work that puts the stress on lead wires of a capacitor such as correction of the position right after soldering.

- (3) When soldering with a soldering iron, please see to it lest a soldering iron should touch the body of a capacitor directly.



Cautions about safety In use of Capacitors

(MMC type)

Registry

HWC 305000

Rev.

0 2

Sheet

2 / 2

4. Mounting

- (1) When inserting a lead wire into the printed circuit board, the stress put on a lead wire shall be within the following range.

Bending of lead wire

When bending a lead wire vertically and then restoring straight, bending of a lead wire in the same place shall be less than two cycles. (One cycle -- bending at 90° and restoring straight)

Twisting of lead wire

Twisting of a lead wire should be carried out within a turn (a 360° turn) in total.

Pulling of lead wire

The load in pulling of a lead wire shall be less than 20N.

In case that the above stress is combined together, the value in application should be set less than half of each value.

- (2) When mounting a capacitor by force owing to the difference of the space between lead wires of a capacitor from the space between the holes on the printed circuit board, be careful.

It may cause breakage of a lead wire or cracks on coating resin.

- (3) When mounting a capacitor of large size or a capacitor on the equipment affected by vibrations, fix the body of a capacitor with resin etc. which has no effect on a capacitor.

However, resin used for fixing shall be a flame retardant and minimum.

- (4) Mount a capacitor lest it should touch other parts.

Especially in case of touching a part with self heat generation, a capacitor may deteriorate due to heat and short circuit may be easily caused owing to lowering of dielectric strength or deterioration of the insulation resistance, etc..

5. Cleaning

- (1) When using the solvents for cleaning, use alcohol derivative cleaning solvents (isopropyl alcohol, etc.).

- (2) Since a small amount of ingredient contained in flux may lead to corrosion of terminations of the capacitor or chemical change of the capacitor element, be sure to clean a printed circuit board right after soldering.

- (3) The temperature for drying after cleaning shall be less than the maximum operating temperature.

- (4) When cleaning with solvents but alcohol derivatives, please inquire of us in advance.

6. Storing and waste

- (1) Store under the conditions not exceeding -10 °C ~ +40 °C, 75%RH in the room and avoid storing in the place filled with a sudden change in the temperature, the direct sunlight or corrosive gases (hydrogen sulfide, sulfuric acid, chlorine and ammonia, etc.).

- (2) A long-term storage may cause deterioration of characteristics of a capacitor due to absorbing moisture little by little.

Therefore, be sure to use after checking its characteristics and solderability if stored for over one year.

- (3) As capacitors are classified into industrial waste, please ask experts to dispose of them.

7. The others

Please refer to "Guideline of notabilia for fixed plastic film capacitors for use in electronic equipment" published by Electronic Industries Association of Japan (EIAJ RCR-2350) unless specified in the specification.