


**150mW SOT-523 SURFACE MOUNT  
Plastic Package  
N-Channel MOSFET**

**Green Product**

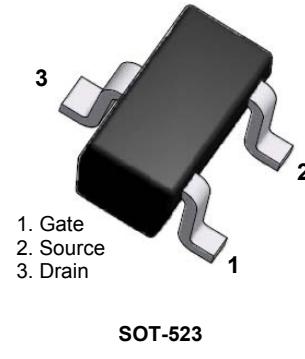

**Absolute Maximum Ratings**  $T_A = 25^\circ\text{C}$  unless otherwise noted


Symbol	Parameter	Value	Units
$V_{DS}$	Drain-Source Voltage	60	V
$V_{GS}$	Continuous Gate-Source Voltage	$\pm 20\text{V}$	V
$I_D$	Continuous Drain Current	115	mA
$P_D$	Power Dissipation	150	mW
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	833	$^\circ\text{C}/\text{W}$
$T_{STG}$	Storage Temperature Range	-55 to +150	$^\circ\text{C}$
$T_J$	Operating Junction Temperature	+150	$^\circ\text{C}$

These ratings are limiting values above which the serviceability of the device may be impaired.


**Specification Features:**

- Low On-resistance
- Low Gate Threshold Voltage
- Low Input capacitance
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Weight: approx. 0.002g

**Electrical Symbol:**

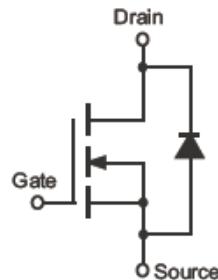

**Device Marking Code:**





SEMICONDUCTOR

**Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Off Characteristics**

Symbol	Parameter	Test Condition	Limits			Unit
			Min	Typ	Max	
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=10\text{uA}$	60			Volts
$I_{\text{GSS}}$	Gate-Body Leakage	$V_{\text{DS}}=0\text{V}, V_{\text{GS}}=\pm 20\text{V}$			$\pm 1$	$\text{uA}$
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current	$V_{\text{DS}}=60\text{V}, V_{\text{GS}}=0\text{V}$			100	$\text{nA}$

**On Characteristics**



Symbol	Parameter	Test Condition	Limits			Unit
			Min	Typ	Max	
$V_{\text{th(GS)}}$	Gate-Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\text{uA}$	1			Volts
$I_{\text{D(ON)}}$	On-state Drain Current	$V_{\text{GS}}=10\text{V}, V_{\text{DS}}=7\text{V}$	500			$\text{mA}$
$R_{\text{DS(on)}}$	Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=500\text{mA}$			7.5	$\Omega$
		$V_{\text{GS}}=5\text{V}, I_{\text{D}}=50\text{mA}$			7.5	$\Omega$
$g_{\text{fs}}$	Forward Trans Conductance	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=200\text{mA}$	80		500	$\text{ms}$
$V_{\text{DS(on)}}$	Drain-Source On-Voltage	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=500\text{mA}$			3.75	$\text{V}$
		$V_{\text{GS}}=5\text{V}, I_{\text{D}}=50\text{mA}$			0.375	$\text{V}$
$V_{\text{SD}}$	Diode Forward Voltage	$I_{\text{S}}=250\text{mA}, V_{\text{GS}}=0\text{V}$			1	$\text{V}$

**Dynamic Characteristics**

Symbol	Parameter	Test Condition	Limits			Unit
			Min	Typ	Max	
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}} = 25\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0\text{MHz}$	--	--	50	pF
$C_{\text{oss}}$	Output Capacitance		--	--	25	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance		--	--	5.0	pF

**Switching Characteristics**

Symbol	Parameter	Test Condition	Limits			Unit
			Min	Typ	Max	
$t_{\text{D(on)}}$	Turn-on Time	$V_{\text{DD}}=10\text{V}, R_{\text{L}}=20\Omega, I_{\text{D}}=500\text{mA}, V_{\text{GEN}}=10\text{V}, R_{\text{G}} = 10\Omega$	--	5.6	--	nS
$t_{\text{D(off)}}$	Turn-off Time		--	25	--	nS

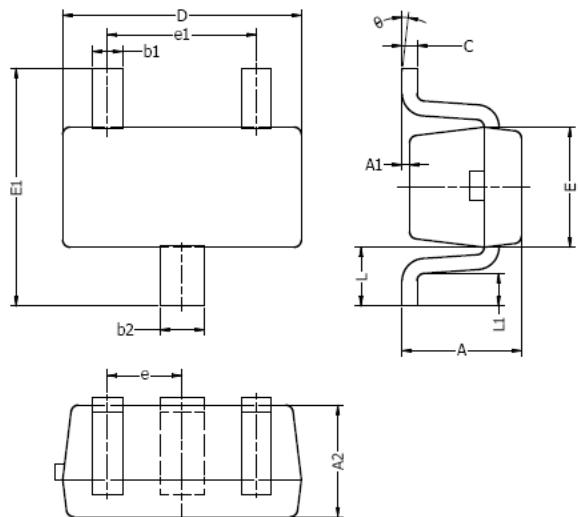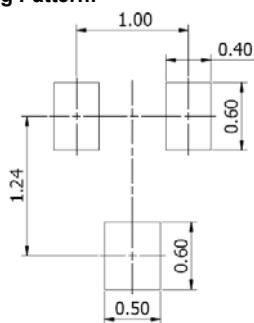**SOT-523 Package Outline**

**Typical Soldering Pattern:**


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.70	0.90	0.028	0.035
A1	0.00	0.10	0.000	0.004
A2	0.70	0.80	0.028	0.031
b1	0.15	0.25	0.006	0.010
b2	0.25	0.35	0.010	0.014
c	0.10	0.20	0.004	0.008
D	1.50	1.70	0.059	0.067
E	0.70	0.90	0.028	0.035
E1	1.45	1.75	0.057	0.069
e	0.50 TYP.		0.020 TYP.	
e1	0.90	1.10	0.035	0.043
L	0.40 REF.		0.016 REF.	
L1	0.10	0.30	0.004	0.012
θ	0°	8°	0°	8°

**NOTES:**

1. Above package outline conforms to JEITA EAIJ ED-7500A SC-75A.
2. Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.



---

## DISCLAIMER NOTICE

### NOTICE

The information presented in this document is for reference only. Tak Cheong reserves the right to make changes without notice for the specification of the products displayed herein.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices). Tak Cheong Semiconductor Co., Ltd., or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.takcheong.com>, or consult your nearest Tak Cheong's sales office for further assistance.