EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

1206 Package Chip LED (1.1 mm Height)

15-21/GHC-YR1S2/2T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version.

Descriptions

- The 15-21 SMD Taping is m uch sm aller than lead fram e type com ponents, thus enable sm aller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight m akes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

DADTEN	Ch		
PART No.	Material Emi	tted Color	Lens Color
15-21/GHC-YR1S2/2T	InGaN	Brilliant Green	Water Clear




Everlight Electronics Co., Ltd. http://www.everlight.com Page:

Device No: SZDSE-151-G01 Prepared date: 20-Aug-2005 Prepared by: Meng Yali


Rev 2

1 of 10


Package Outline Dimensions

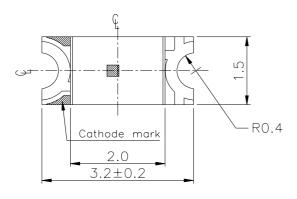






For reflow soldering (propose)



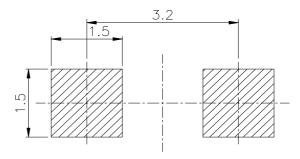

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 2 of 10



Absolute Maximum Ratings (Ta=25°C)

Parameter Sym	bol	Rating	Unit	
Reverse Voltage	Vr 5		V	
Forward Current	IF 25		mA	
Operating Temperature	Topr	- 40 ∼ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\mathbb{C}$	
Electrostatic Discharge(HBM)	ESD	150	V	
Power Dissipation	Pd	110	mW	
Peak Forward Current (Duty 1/10 @1KHz)	If 100		mA	
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

		,	- /			
Parameter Sym	n bol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	112		225	mcd	
Viewing Angle	2 \theta 1/2		140		deg	
Peak Wavelength	λp	-	518		nm	
Dominant Wavelength	λ d 520)		535	nm	I _F =20mA
Spectrum Radiation Bandwidth	△λ		35		nm	
Forward Voltage	V_{F}	3.5		3.7	V	
Reverse Current	I _R			50	μΑ	$V_R=5V$

Notes:

1. Tolerance of Luminous Intensity ±10%

2. Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 3 of 10



Bin Range Of Dom. Wavelength

Groups	Bin Min	Max	Unit	Condition
	X 520	525		
Y	Y 525	530	nm I	F=20mA
	Z 530	 535		

Bin Range Of Luminous Intensity

Bin Min	Max Unit		Condition
R2 125	200		
S1 160	250	mcd I	F=20mA
S2 250	400		


Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 4 of 10

Typical Electro-Optical Characteristics

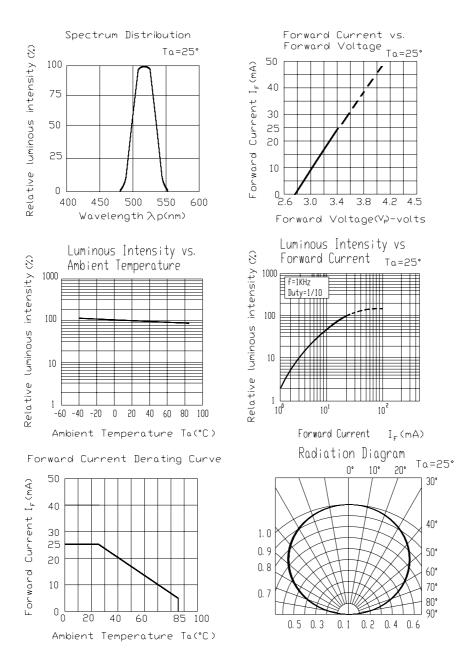

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 5 of 10

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank




Reel Dimensions

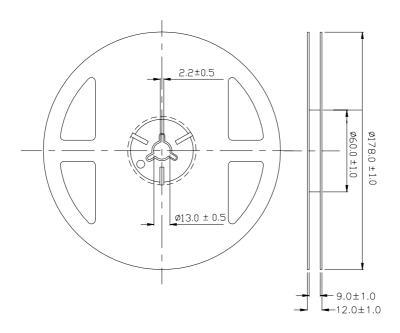

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 6 of 10

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

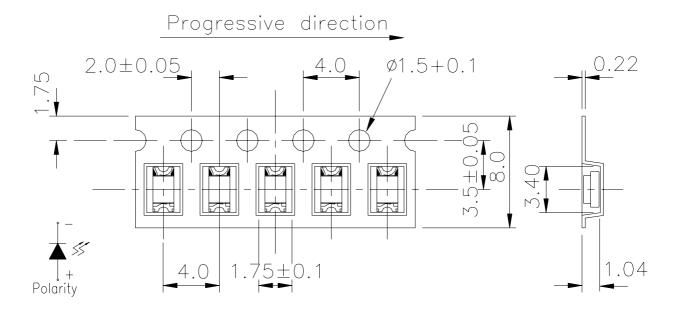

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

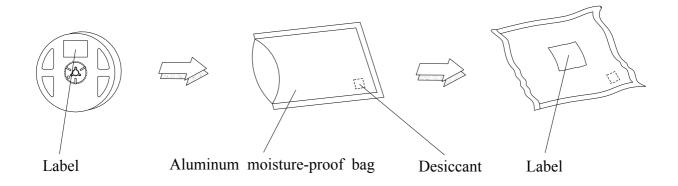

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 7 of 10



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No. It	em s	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1 Re	flow Soldering	Temp.: $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 6 Min.		22 Pcs.	0/1
2 Te	mperature Cycle	H:+100°C 15m in ∫ 5 min L:-40°C 15m in	300 Cycles	22 PCS.	0/1
3 Th	erm al Shock	H:+100°C 5m in ∫ 10 sec L:-10°C 5m in	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 8 of 10

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

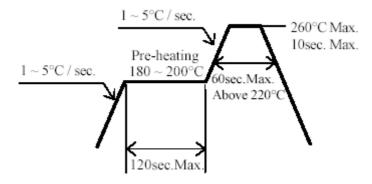

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 9 of 10

Device No: SZDSE-151-G01 Prepared date: 20-Aug-2005 Prepared by: Meng Yali



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

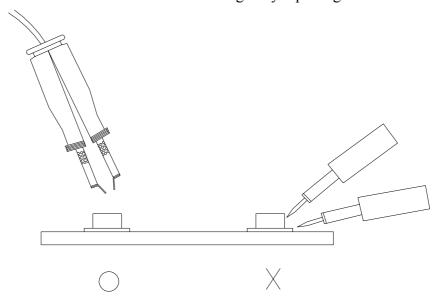

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 10 of 10