

Technical Data Sheet

0402 Package Chip LED (0.3mm Height)

16S-216/T3D-JP2R1QY/3T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

- The 16S-216 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

Device Selection Guide

D. (N		Chip	D : C I	
Part No.	Material	Emitted Color	Resin Color	
16S-216/T3D-JP2R1QY/3T	InGaN	Pure White	Yellow Diffused	


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.3 Page: 1 of 12


Device No.: DSE-0002956 Prepared date: 20-Sep-2012 Prepared by: Jack Chiu Revision : 3 Release Date: 2012-09-26 11:10:16.0






Package Outline Dimensions







Polarity



Recommend sodering





Note: The tolerances unless mentioned is ± 0.1 mm , Unit = mm

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev.3

Page: 2 of 12

Device No.: DSE-0002956 **Revision** : 3

Prepared date: 20-Sep-2012 Prepared by: Jack Chiu Release Date:2012-09-26 11:10:16.0

Expired Period: Forever

正式發行 Approved LifecyclePhase:



Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA
Power Dissipation	Pd	95	mW
Electrostatic Discharge(HBM)	ESD	150	V
Operating Temperature	Topr	-40 ~ +85	
Storage Temperature	Tstg	-40 ~ +90	
Soldering Temperature	Tsol	Reflow Soldering : 260 Hand Soldering : 350	for 10 sec. for 3 sec.

Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	57	244	140	mcd	
Viewing Angle	2 1/2		130		deg	IF=5mA
Forward Voltage	VF	2.7		3.2	V	
Reverse Current	Ir			50	μА	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.3 Page: 3 of 12

Device No.: DSE-0002956 Prepared date: 20-Sep-2012 Prepared by: Jack Chiu

Revision : 3 Release Date: 2012-09-26 11:10:16.0



Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition	
P2	57	72			
Q1	72	90	,	T- 5 A	
Q2	90	112	mcd	IF=5mA	
R1	112	140			

Bin Range Of Forward Voltage

		0			
Group	Bin	Min	Max	Unit	Condition
	29	2.7	2.8		
	30	2.8	2.9		
Q	31	2.9	3.0	V	IF=5mA
	32	3.0	3.1		
	33	3.1	3.2	_ 1	

Notes:

Revision

: 3

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.3 Page: 4 of 12

Device No.: DSE-0002956 Prepared date: 20-Sep-2012 Prepared by: Jack Chiu

Release Date:2012-09-26 11:10:16.0

LifecyclePhase: Expired Period: Forever Expired Period: Forever



Chromaticity Coordinates Specifications for Bin Grading

Groups	Bin Code	CIE_x	CIE_y	Condition
	X4	0.234	0.202	
		0.234	0.235	
		0.254	0.263	
		0.254	0.230	
		0.234	0.170	
	X3	0.234	0.202	
		0.254	0.230	
J		0.254	0.198	In Suc A
J	X2	0.254	0.230	IF=5mA
		0.254	0.263	
		0.274	0.291	
		0.274	0.258	
	X1	0.254	0.198	
		0.254	0.230	
		0.274	0.258	
		0.274	0.226	

Notes:

- 1.The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.01).
- 2. The products are sensitive to static electricity and care must be fully taken when handling products.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.3 Page: 5 of 12

Device No.: DSE-0002956 Prepared date: 20-Sep-2012 Prepared by: Jack Chiu

Revision : 3 Release Date:2012-09-26 11:10:16.0



CIE Chromaticity Diagram

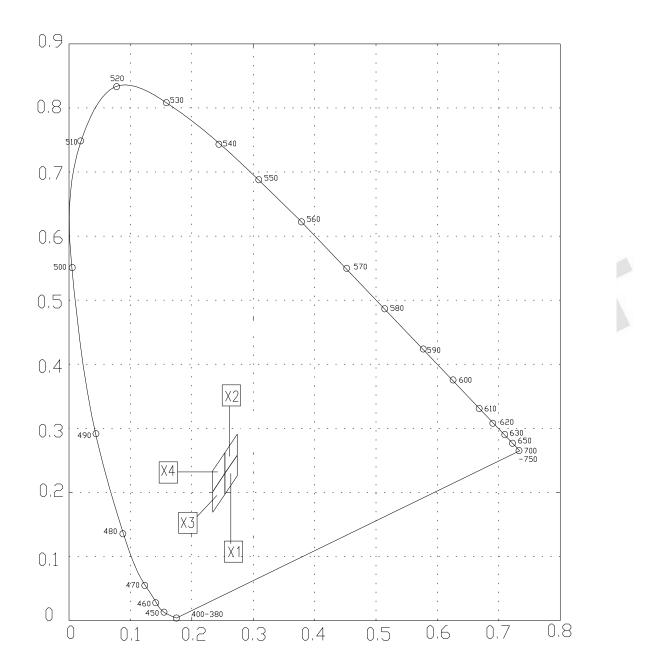

Everlight Electronics Co., Ltd.

Device No. : DSE-0002956

Revision : 3 LifecyclePhase: Approved http://www.everlight.com

Rev.3

Page: 6 of 12


Prepared date: 20-Sep-2012


2 Prepared by: Jack Chiu Release Date: 2012-09-26 11:10:16.0


Expired Period: Forever





Typical Electro-Optical Characteristics Curves














Everlight Electronics Co., Ltd. http://www.everlight.com Rev.3 Page: 7 of 12

Device No.: DSE-0002956 Prepared date: 20-Sep-2012 Prepared by: Jack Chiu Revision : 3 Release Date: 2012-09-26 11:10:16.0




Label Explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

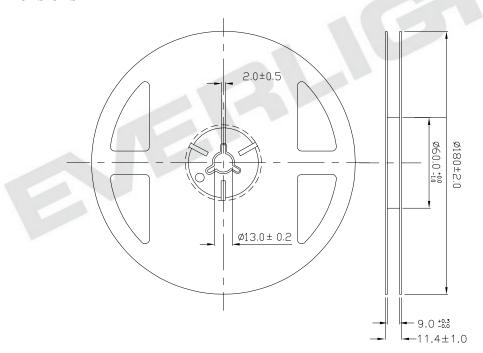

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.3 Page: 8 of 12

Device No.: DSE-0002956 Prepared date: 20-Sep-2012 Prepared by: Jack Chiu

Revision : 3 Release Date:2012-09-26 11:10:16.0




Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

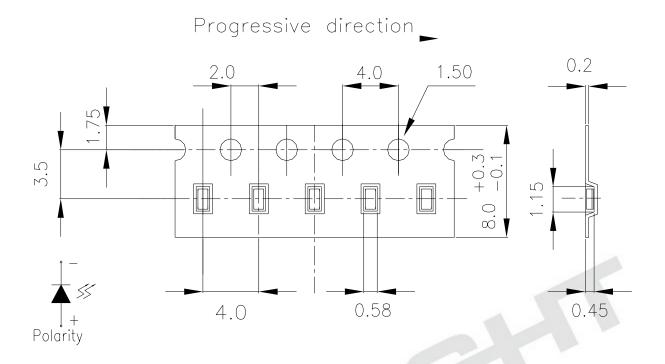

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

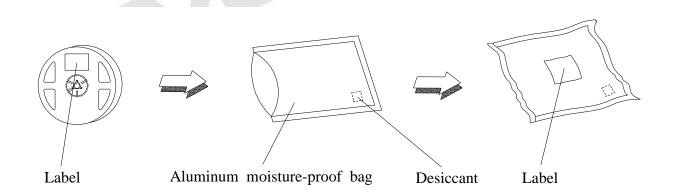

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev.3

Page: 9 of 12

Device No.: DSE-0002956 **Revision** : 3

Prepared date: 20-Sep-2012 Release Date:2012-09-26 11:10:16.0

Prepared by: Jack Chiu

LifecyclePhase:

Expired Period: Forever



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp.: 260 ±5 Max. 10sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H: +100 15min 5 min L: -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100 5min 10 sec L: -10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp.: 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.3 Page: 10 of 12

Device No.: DSE-0002956 Prepared date: 20-Sep-2012 Prepared by: Jack Chiu
Revision : 3 Release Date: 2012-09-26 11:10:16.0




Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment: 60±5 for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

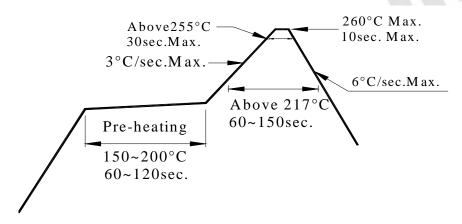

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.3 Page: 11 of 12

Device No.: DSE-0002956 Prepared date: 20-Sep-2012 Prepared by: Jack Chiu Revision : 3 Release Date: 2012-09-26 11:10:16.0




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

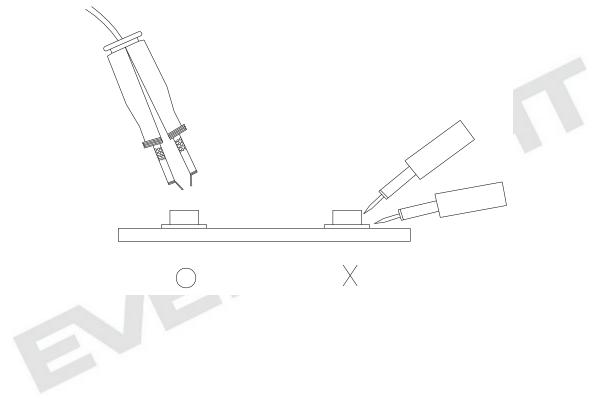

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.3 Page: 12 of 12

Device No.: DSE-0002956 Prepared date: 20-Sep-2012 Prepared by: Jack Chiu Revision : 3 Release Date: 2012-09-26 11:10:16.0