### SN54LS05, SN54S05 SN7405, SN74LS05, SN74S05 HEX INVERTERS WITH OPEN-COLLECTOR OUTPUTS


SDLS030A - DECEMBER 1983 - REVISED NOVEMBER 2003

- Package Options Include Plastic Small-Outline (D, NS), Shrink Small-Outline (DB), and Ceramic Flat (W) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) DIPs
- Dependable Texas Instrument Quality and Reliability

SN5405, SN54LS05, SN54S05...J PACKAGE
SN7405...N PACKAGE
SN74LS05...D, DB, N, OR NS PACKAGE
SN74S05...D, N, OR NS PACKAGE

(TOP VIEW)

8 🛮 4Y



NC - No internal connection

#### description/ordering information

GND

These devices contain six independent inverters. To perform correctly, the open-collector outputs require pullup resistors. These devices may be connected to other open-collector outputs to implement active-low wired-OR or active-high wire-AND functions. Open-collector devices often are used to generate high V<sub>OH</sub> levels.

#### ORDERING INFORMATION

TA	PAC	(AGE†	ORDERABLE PART NUMBER	TOP-SIDE MARKING
			SN7405N	SN7405N
	PDIP – N	Tube	SN74LS05N	SN74LS05N
			SN74S05N	SN74S05N
		Tube	SN74LS05D	1.005
000 to 7000	COIC D	Tape and reel	SN74LS05DR	LS05
0°C to 70°C	SOIC - D	Tube	SN74S05D	005
		Tape and reel	SN74S05DR	S05
	COD NC	Tana and saal	SN74LS05NSR	74LS05
	SOP – NS	Tape and reel	SN74S05NSR	74S05
	SSOP – DB	Tape and reel	SN74LS05DBR	LS05
	CDID	Tubo	SNJ54LS05J	SNJ54LS05J
	CDIP – J	Tube	SNJ54S05J	SNJ54S05J
–55°C to 125°C	CDID W	Turke	SNJ54LS05W	SNJ54LS05W
-55°C to 125°C	CDIP – W	Tube	SNJ54S05W	SNJ54S05W
	LCCC – FK	Tube	SNJ54LS05FK	SNJ54LS05FK
	LCCC - FK	Tube	SNJ54S05FK	SNJ54S05FK

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



#### **FUNCTION TABLE** (each inverter)

INPUT A	OUTPUT Y
Н	L
L	Н


#### logic diagram (positive logic)

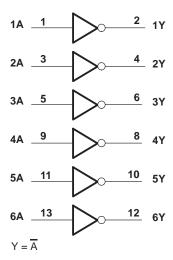

Pin numbers shown are for the D, DB, J, N, and NS packages.

SDLS030A - DECEMBER 1983 - REVISED NOVEMBER 2003

#### schematic (each inverter)

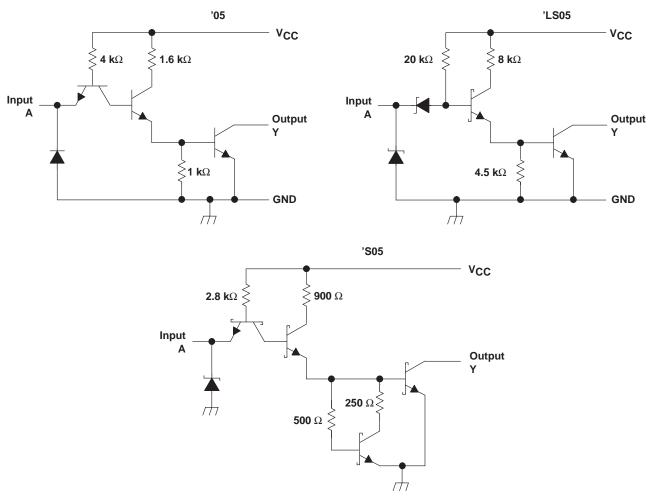

Resistor values shown are nominal.

## absolute maximum ratings over operating free-air temperature (unless otherwise noted)†

Supply voltage, V <sub>CC</sub> (see Note 1): '05, 'LS05, '3	S05	7 V
Input voltage, V <sub>I</sub> : '05, 'S05		5.5 V
'LS05		7 V
Off-state output voltage, VO		7 V
Package thermal impedance, θ <sub>JA</sub> (see Note 2):	: D package	86°C/W
	DB package	96°C/W
	N package	80°C/W
	NS package	76°C/W
Storage temperature range, T <sub>stg</sub>		. −65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.



NOTES: 1. Voltage values are with respect to network ground terminal.

<sup>2.</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

SDLS030A - DECEMBER 1983 - REVISED NOVEMBER 2003

#### recommended operating conditions

		SN5405				SN7405		
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
VIH	High-level input voltage	2			2			V
VIL	Low-level input voltage			0.8			0.8	V
VOH	High-level output voltage			5.5			5.5	V
l <sub>OL</sub>	Low-level output current			16			16	mA
TA	Operating free-air temperature	-55		125	0		70	°C

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

				SN5405			SN7405		
PARAMETER	TEST CONDITIONS <sup>†</sup>		MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	UNIT
VIK	V <sub>CC</sub> = MIN,	$I_I = -12 \text{ mA}$			-1.5			-1.5	V
1	\/ NAINI	V <sub>IL</sub> = 0.8 V						0.25	A
ЮН	$V_{CC} = MIN,$	$V_{OH} = 5.5 \text{ V}$ $V_{IL} = 0.7 \text{ V}$			0.25				mA
V <sub>OL</sub>	V <sub>CC</sub> = MIN,	$V_{IH} = 2 V$ , $I_{OL} = 16 \text{ mA}$		0.2	0.4		0.2	0.4	V
IĮ	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 5.5 V			1			1	mA
lН	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 2.4 V			40			40	μΑ
I <sub>IL</sub>	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 0.4 V			-1.6			-1.6	mA
ІССН	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 0 V		6	12		6	12	mA
ICCL	$V_{CC} = MAX$ ,	V <sub>I</sub> = 4.5 V		18	33		18	33	mA

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

## switching characteristics, $V_{CC}$ = 5 V, $T_A$ = 25°C (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CO	NDITIONS	MIN	TYP	MAX	UNIT
<sup>t</sup> PLH		V	$R_L = 4 k\Omega$	0 45 5		40	55	
t <sub>PHL</sub>	А	Y	R <sub>L</sub> = 400 Ω	C <sub>L</sub> = 15 pF		8	15	ns

<sup>‡</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

#### recommended operating conditions

		SN54LS05 SN74LS05			5			
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
٧ <sub>IH</sub>	High-level input voltage	2			2			V
٧ <sub>IL</sub>	Low-level input voltage			0.7			8.0	V
Vон	High-level output voltage			5.5			5.5	V
l <sub>OL</sub>	Low-level output current			4			8	mA
TA	Operating free-air temperature	-55		125	0		70	°C

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

			+	S	N54LS0	5	S	N74LS0	5	
PARAMETER		TEST CONDITIONS	I	MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	UNIT
VIK	V <sub>CC</sub> = MIN,	I <sub>I</sub> = -18 mA				-1.5			-1.5	V
ЮН	V <sub>CC</sub> = MIN,	$V_{IL} = MAX$ ,	V <sub>OH</sub> = 5.5 V			0.1			0.1	mA
.,	N/ BAIN!		I <sub>OL</sub> = 4 mA		0.25	0.4		0.25	0.4	.,
VOL	$V_{CC} = MIN,$	V <sub>IH</sub> = 2 V	$I_{OL} = 8 \text{ mA}$					0.35	0.5	V
l <sub>l</sub>	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 7 V				0.1			0.1	mA
lіН	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 2.7 V				20			20	μΑ
I₁∟	$V_{CC} = MAX$ ,	V <sub>I</sub> = 0.4 V				-0.4			-0.4	mA
Іссн	$V_{CC} = MAX$ ,	V <sub>I</sub> = 0 V			1.2	2.4		1.2	2.4	mA
ICCL	$V_{CC} = MAX$ ,	V <sub>I</sub> = 4.5 V	_		3.6	6.6		3.6	6.6	mA

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

## switching characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^{\circ}\text{C}$ (see Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>PLH</sub>		V	D 010 0 45 = 5		17	32	
t <sub>PHL</sub>	А	Y	$R_L = 2 k\Omega$ , $C_L = 15 pF$		15	28	ns

<sup>‡</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

#### recommended operating conditions

		S	N54S05		9	N74S05	1	LINUT
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
VIH	High-level input voltage	2			2			V
VIL	Low-level input voltage			0.8			0.8	V
Vон	High-level output voltage			5.5			5.5	V
l <sub>OL</sub>	Low-level output current			20			20	mA
TA	Operating free-air temperature	-55		125	0		70	°C

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETER		TEST SOUDITIONS <sup>†</sup>	SN5	54S05		5	N74S05		
PARAMETER		TEST CONDITIONS†	MIN T	YP‡ N	IAX	MIN	TYP <sup>‡</sup>	MAX	UNIT
VIK	V <sub>CC</sub> = MIN,	$I_I = -18 \text{ mA}$		-	-1.2			-1.2	V
	\/ NAINI	V <sub>IL</sub> = 0.8 V						0.25	A
ІОН	$V_{CC} = MIN,$	$V_{OH} = 5.5 \text{ V}$ $V_{IL} = 0.7 \text{ V}$		(	).25				mA
V <sub>OL</sub>	$V_{CC} = MIN,$	$V_{IH} = 2 V$ , $I_{OL} = 20 \text{ mA}$			0.5			0.5	V
l <sub>l</sub>	$V_{CC} = MAX$ ,	V <sub>I</sub> = 5.5 V			1			1	mA
lн	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 2.7 V			50			50	μΑ
IIL	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 0.5 V			-2			-2	mA
ІССН	V <sub>CC</sub> = MAX,	V <sub>I</sub> = 0 V		9 1	9.8		9	19.8	mA
ICCL	$V_{CC} = MAX$ ,	V <sub>I</sub> = 4.5 V		30	54		30	54	mA


<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

## switching characteristics, $V_{CC}$ = 5 V, $T_A$ = 25°C (see Figure 1)


PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CO	NDITIONS	MIN	TYP	MAX	UNIT
<sup>t</sup> PLH				C <sub>L</sub> = 15 pF	2	5	7.5	ns
<sup>t</sup> PHL	^	V	D 000 0	C[ = 15 pr	2	4.5	7	113
<sup>t</sup> PLH	A	Y	$R_L = 280 \Omega$	C 50 = E		7.5		
t <sub>PHL</sub>				$C_L = 50 pF$		7		ns

<sup>‡</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

## PARAMETER MEASUREMENT INFORMATION SERIES 54/74 AND 54S/74S DEVICES



LOAD CIRCUIT

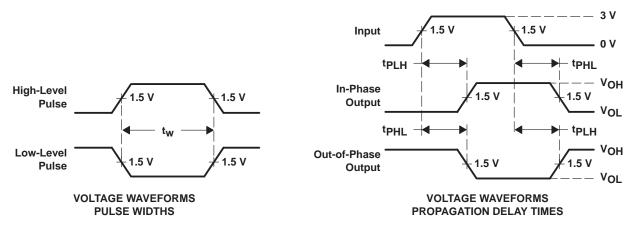


NOTES: A.  $C_L$  includes probe and jig capacitance.


- B. In the examples above, the phase relationships between inputs and outputs have been chosen arbitrarily.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O$  = 50  $\Omega$ , and: For Series 54/74,  $t_f \leq$  7 ns,  $t_f \leq$  7 ns. For Series 54S/74S,  $t_f \leq$  2.5 ns,  $t_f \leq$  2.5 ns.
- D. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

## PARAMETER MEASUREMENT INFORMATION SERIES 54LS/74LS DEVICES



**LOAD CIRCUIT** 

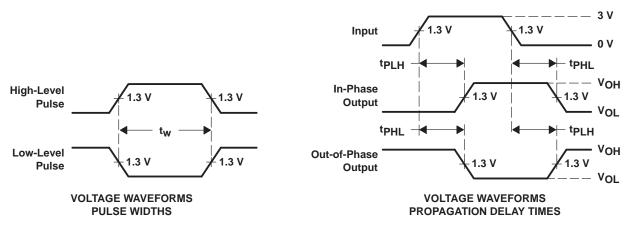

NOTES: A.  $C_L$  includes probe and jig capacitance.

- B. In the examples above, the phase relationships between inputs and outputs have been chosen arbitrarily.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \ \Omega$ ,  $t_f \leq 1.5 \ ns$ ,  $t_f \leq 2.6 \ ns$ .
- D. The outputs are measured one at a time with one input transition per measurement.

Figure 2. Load Circuit and Voltage Waveforms





10-Jun-2014

#### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type		Pins		Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
JM38510/07004BCA	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	-55 to 125	JM38510/ 07004BCA	Samples
M38510/07004BCA	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	-55 to 125	JM38510/ 07004BCA	Samples
SN54LS05J	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	-55 to 125	SN54LS05J	Samples
SN54S05J	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	-55 to 125	SN54S05J	Samples
SN7405D	OBSOLETE	SOIC	D	14		TBD	Call TI	Call TI	0 to 70		
SN7405DR	OBSOLETE	SOIC	D	14		TBD	Call TI	Call TI	0 to 70		
SN7405N	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	SN7405N	Samples
SN7405N3	OBSOLETE	PDIP	N	14		TBD	Call TI	Call TI	0 to 70		
SN7405NE4	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type 0 to 70		SN7405N	Samples
SN74LS05D	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM 0 to 70		LS05	Samples
SN74LS05DBLE	OBSOLETE	SSOP	DB	14		TBD	Call TI	Call TI	0 to 70		
SN74LS05DBR	ACTIVE	SSOP	DB	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM 0 to 70		LS05	Samples
SN74LS05DBRE4	ACTIVE	SSOP	DB	14		TBD	Call TI	Call TI	0 to 70		Samples
SN74LS05DBRG4	ACTIVE	SSOP	DB	14		TBD	Call TI	Call TI	0 to 70		Samples
SN74LS05DE4	ACTIVE	SOIC	D	14		TBD	Call TI	Call TI	0 to 70		Samples
SN74LS05DG4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	LS05	Samples
SN74LS05DR	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM 0 to 70		LS05	Samples
SN74LS05DRE4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM 0 to 70		LS05	Samples
SN74LS05DRG4	ACTIVE	SOIC	D	14		TBD	Call TI	Call TI 0 to 70			Samples
SN74LS05N	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	SN74LS05N	Samples





www.ti.com

10-Jun-2014

Orderable Device		Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
SN74LS05N3	OBSOLETE	PDIP	N	14	٦.,	(2) TBD	(6) Call TI	(3) Call TI	0 to 70	(4/5)	
SN74LS05NE4	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	SN74LS05N	Samples
SN74LS05NSR	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	74LS05	Samples
SN74LS05NSRG4	ACTIVE	SO	NS	14		TBD	Call TI	Call TI	0 to 70		Samples
SN74S05D	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	S05	Samples
SN74S05N	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	SN74S05N	Samples
SN74S05N3	OBSOLETE	PDIP	N	14		TBD	Call TI	Call TI	0 to 70		
SN74S05NE4	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	SN74S05N	Samples
SN74S05NSR	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	74\$05	Samples
SNJ54LS05FK	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	-55 to 125	SNJ54LS 05FK	Samples
SNJ54LS05J	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	-55 to 125	SNJ54LS05J	Samples
SNJ54LS05W	ACTIVE	CFP	W	14	1	TBD	A42	N / A for Pkg Type	-55 to 125	SNJ54LS05W	Samples
SNJ54S05FK	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	-55 to 125	SNJ54S 05FK	Samples
SNJ54S05J	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	-55 to 125	SNJ54S05J	Samples
SNJ54S05W	ACTIVE	CFP	W	14	1	TBD	A42	N / A for Pkg Type	-55 to 125	SNJ54S05W	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

#### PACKAGE OPTION ADDENDUM



10-Jun-2014

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free** (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead/Ball Finish Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN54LS05, SN54S05, SN7405, SN74LS05, SN74S05:

Catalog: SN74LS05, SN74S05

Military: SN5405, SN54LS05, SN54S05

NOTE: Qualified Version Definitions:


- Catalog TI's standard catalog product
- Military QML certified for Military and Defense Applications

## PACKAGE MATERIALS INFORMATION

www.ti.com 14-Jul-2012

#### TAPE AND REEL INFORMATION

#### **REEL DIMENSIONS**

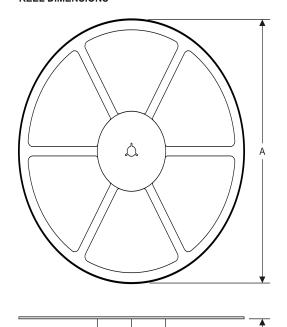

#### **TAPE DIMENSIONS**



A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### TAPE AND REEL INFORMATION

#### \*All dimensions are nominal

All diffierisions are nomina												
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LS05DBR	SSOP	DB	14	2000	330.0	16.4	8.2	6.6	2.5	12.0	16.0	Q1
SN74LS05DR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LS05NSR	SO	NS	14	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
SN74S05NSR	SO	NS	14	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1

www.ti.com 14-Jul-2012



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LS05DBR	SSOP	DB	14	2000	367.0	367.0	38.0
SN74LS05DR	SOIC	D	14	2500	367.0	367.0	38.0
SN74LS05NSR	SO	NS	14	2000	367.0	367.0	38.0
SN74S05NSR	SO	NS	14	2000	367.0	367.0	38.0

### 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

## W (R-GDFP-F14)

## CERAMIC DUAL FLATPACK



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only.
- E. Falls within MIL STD 1835 GDFP1-F14



## FK (S-CQCC-N\*\*)

## LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. Falls within JEDEC MS-004



## N (R-PDIP-T\*\*)

## PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



## D (R-PDSO-G14)

#### PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.



## D (R-PDSO-G14)

## PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



#### **MECHANICAL DATA**

## NS (R-PDSO-G\*\*)

## 14-PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



#### DB (R-PDSO-G\*\*)

#### PLASTIC SMALL-OUTLINE

#### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

#### Products Applications

Audio www.ti.com/audio Automotive and Transportation www.ti.com/automotive Communications and Telecom Amplifiers amplifier.ti.com www.ti.com/communications **Data Converters** dataconverter.ti.com Computers and Peripherals www.ti.com/computers **DLP® Products** www.dlp.com Consumer Electronics www.ti.com/consumer-apps

DSP **Energy and Lighting** dsp.ti.com www.ti.com/energy Clocks and Timers www.ti.com/clocks Industrial www.ti.com/industrial Interface interface.ti.com Medical www.ti.com/medical logic.ti.com Logic Security www.ti.com/security

Power Mgmt power.ti.com Space, Avionics and Defense www.ti.com/space-avionics-defense

Microcontrollers microcontroller.ti.com Video and Imaging www.ti.com/video

RFID www.ti-rfid.com

OMAP Applications Processors <a href="https://www.ti.com/omap">www.ti.com/omap</a> TI E2E Community <a href="https://example.com/omap">e2e.ti.com/omap</a>

Wireless Connectivity <u>www.ti.com/wirelessconnectivity</u>