

Technical Data Sheet 1.6mm round Subminiature Side Looking Infrared LED

IR26-61C/L110/TR8

Features

- Small double-end package
- Low forward voltage
- Good spectral matching to Si photo detector
- Package in 8mm tape on 7" diameter reel.
- Pb free
- The product itself will remain within RoHS compliant version.

Descriptions

• IR26-61C/L110/TR8 is an infrared emitting diode in miniature SMD package which is molded in a water clear plastic with spherical top view lens. The device is spectrally matched with silicon photodiode and phototransistor

Applications

• Infrared applied system

Device Selection Guide


LED D. AM	Chip	I and Call	
LED Part No.	Material	Lens Color	
IR26-61C/L110/TR8	GaAlAs	Water Clear	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 1 of 9

Device No: DIR-0000829 Prepared date: 02-17-2011 Prepared by: Jason Ho



Package Dimensions

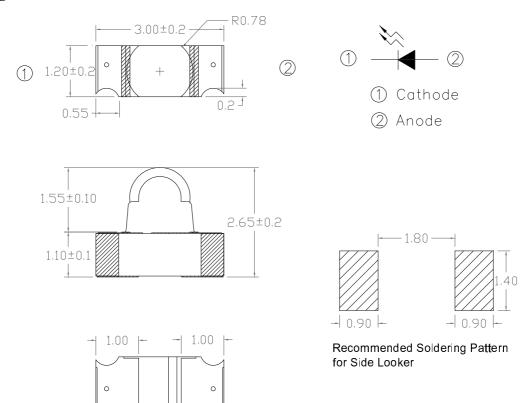

Notes: 1.All dimensions are in millimeters

2.Tolerances unless dimensions ±0.1mm

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Units	
Continuous Forward Current	I_{F}	65	mA	
Reverse Voltage	V_R	5	V	
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\!\mathbb{C}$	
Soldering Temperature *1	T_{sol}	260	$^{\circ}\!\mathbb{C}$	
Power Dissipation at(or below)	P_d	100	mW	
25°C Free Air Temperature				

Notes: *1:Soldering time ≤ 5 seconds.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 2 of 9

Device No: DIR-0000829 Prepared date: 02-17-2011 Prepared by: Jason Ho



Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Radiant Intensity	Ie	$I_F=20mA$	1.0	3.0		mW/sr
		$I_F = 100 mA$ Pulse Width $\leq 100 \mu$ s ,Duty $\leq 1\%$		14		
Peak Wavelength	λр	I _F =20mA	920	940	960	nm
Spectral Bandwidth	Δλ	I _F =20mA		50		nm
Forward Voltage	V_{F}	I _F =20mA		1.2	1.5	V
		$I_F = 100 mA$ Pulse Width $\leq 100 \mu$ s ,Duty $\leq 1\%$		1.5	1.8	
Reverse Current	I_R	V _R =5V	1		10	μ A
Optical Rise Time	tr	I _F =20mA	1	700		ns
Optical Fall Time	tf	I _F =20mA	1	400		ns
View Angle	2 \theta 1/2	I _F =20mA		25		deg

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 9

Device No: DIR-0000829 Prepared date: 02-17-2011 Prepared by: Jason Ho




Typical Electro-Optical Characteristics Curves

Fig.1 Forward Current vs. **Ambient Temperature**

100 80 I_F - Forward Current (mA) 60 40 20 0 20 40 60 80 100 T_{amb} - Ambient Temperature (°C)

Fig.2 Spectral Distribution



Wavelength \(\lambda\) (nm)

Fig.3 Relative Intensity vs. Forward Current





Fig.4 Forward Current vs. Forward Voltage




Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 4 of 9 Device No: DIR-0000829 Prepared date: 02-17-2011 Prepared by : Jason Ho



Typical Electro-Optical Characteristics Curves

Fig.6 Relative Radiant Intensity vs.

Angular Displacement

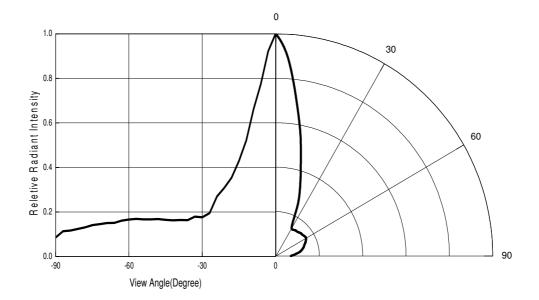

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 5 of 9

Device No: DIR-0000829 Prepared date: 02-17-2011 Prepared by: Jason Ho



Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 The LEDs should be used within a year.
 - 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
 - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
 - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

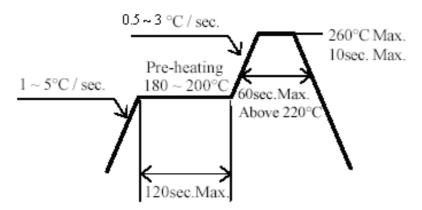

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 6 of 9

Device No: DIR-0000829 Prepared date: 02-17-2011 Prepared by: Jason Ho




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

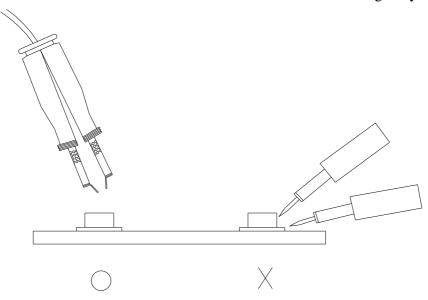


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 7 of 9

Device No: DIR-0000829 Prepared date: 02-17-2011 Prepared by: Jason Ho




Package Dimensions

1. Reel Dimensions

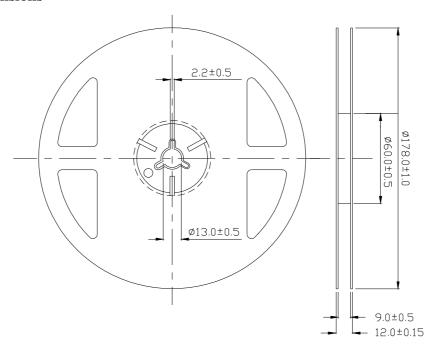

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

2. Carrier Tape Dimensions:(Quantity: 1500pcs/reel)

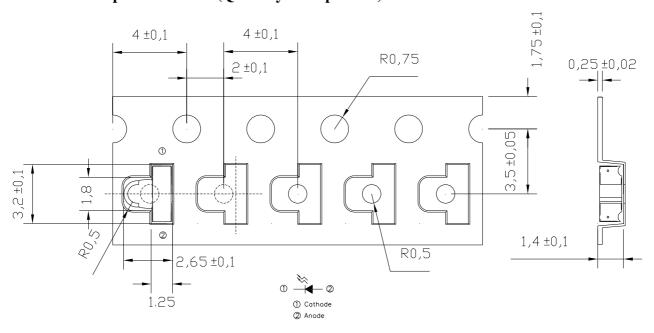


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 8 of 9

Device No: DIR-0000829 Prepared date: 02-17-2011 Prepared by: Jason Ho



Packing Procedure

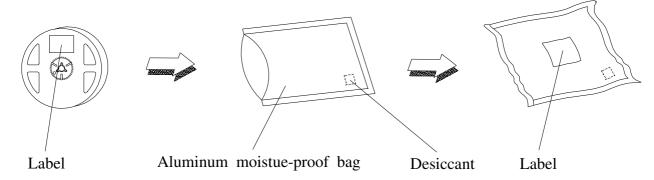

Label Form Specification



CPN: Customer's Production Number

P/N : Production Number QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 6-8, Zhonghua Rd., Shulin Dist.,

New Taipei City 23860, Taiwan, R.O.C

Tel: 886-2-2685-6688 Fax: 886-2-2685-6699 http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 9 of 9

Device No: DIR-0000829 Prepared date: 02-17-2011 Prepared by: Jason Ho