# SMD Power Inductor

# CDRH40D28/T125



## Description

- Ferrite drum core construction.
- Magnetically shielded.
- LxWxH:4.5x4.5x3.0mm Max.
- Product weight:0.13 g (Ref.)
- Moisture Sensitivity Level: 1



🕑 sumida

## **Environmental Data**

- Operating temperature range: -40°C~+125°C (including coil's self temperature rise)
- Storage condition of before PCB mounting : Ta:5~40°C, RH:20~70%

## Packaging


- Carrier tape and reel packaging.
- 13.0" diameter reel. 2000pcs per reel.

# Applications


• Automotive application and other high temperature, high reliability application type withstand up to 125°C.

3.0 Max.

# Dimension - [mm]




**Recommended Land pattern - [mm]** 



(2.8 Typ.) Cutting area

**Wire Connection** 



Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

Page 1 of 4

WWW.SUMIDA.COM

# SMD Power Inductor CDRH40D28/T125





### **Electrical Characteristics**


Part Number	Inductance [Within] (μ Η) ※1	D.C.R. at 20°C max(typ) (m Ω )	Saturation Current (A) %2		Temperature Rise Current
			20°C	125°C	(A) ※3
CDRH40D28T125NP-1R5NC	1.50 ± 30%	43.50 (35.00)	2.76	2.41	3.00
CDRH40D28T125NP-1R8NC	1.80 ± 30%	50.00 (40.00)	2.50	2.20	2.75
CDRH40D28T125NP-2R2NC	2.20 ± 30%	56.00 (45.00)	2.32	1.95	2.70
CDRH40D28T125NP-3R3NC	3.30 ± 30%	68.50 (55.00)	1.99	1.70	2.35
CDRH40D28T125NP-4R7NC	4.70 ± 30%	85.00 (68.00)	1.62	1.40	2.00
CDRH40D28T125NP-5R6NC	5.60 ± 30%	112 (90.00)	1.50	1.29	1.70
CDRH40D28T125NP-6R8NC	6.80 ± 30%	118 (95.00)	1.35	1.16	1.65
CDRH40D28T125NP-100NC	10.00 ± 30%	188 (150)	1.02	0.90	1.35
CDRH40D28T125NP-150NC	15.00 ± 30%	240 (192)	0.90	0.77	1.20
CDRH40D28T125NP-220NC	22.00 ± 30%	338 (270)	0.76	0.66	0.90
CDRH40D28T125NP-330NC	33.00 ± 30%	619 (495)	0.61	0.52	0.66

%1 Measuring frequency inductance at 100kHz,1V.

X2 Saturation current: This indicates the actual value of D.C. current when the inductance becomes 35% lower than its nominal value.

3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes  $\Delta T=40^{\circ}C$  (Ta=20°C).

## **Solder Reflow Condition**

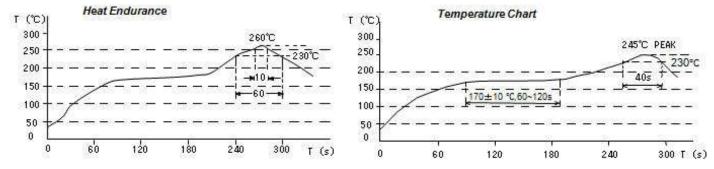

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

Page 2 of 4 WWW.SUMIDA.COM

# **SMD** Power Inductor CDRH40D28/T125 RoHS







### **Saturation Current & Temperature Rise Graph**




```
- L (20°C) - L (125°C)
```


1. CDRH40D28T125NP-1R5NC



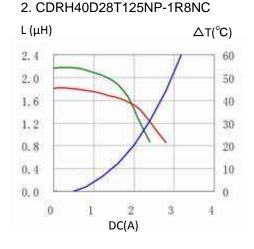





#### 4. CDRH40D28T125NP-3R3NC




#### 5. CDRH40D28T125NP-4R7NC









#### 8. CDRH40D28T125NP-100NC



#### 6. CDRH40D28T125NP-5R6NC



### 9. CDRH40D28T125NP-150NC




Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


Page 3 of 4 WWW.SUMIDA.COM

# **SMD Power Inductor** CDRH40D28/T125 RoHS



# 10. CDRH40D28T125NP-220NC

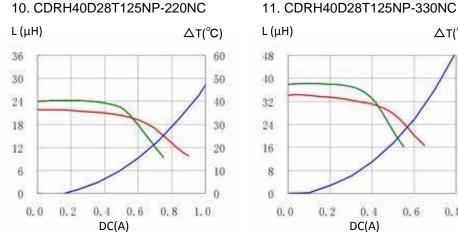

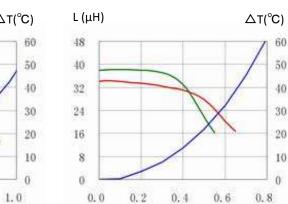

DC(A)





For sales office information, please <u>click here</u> to visit our website.

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

Page 4 of 4

WWW.SUMIDA.COM