[∝] **@**REATEK

CESD323NC5VB-M

CREATEK Microelectronics

ESD Protection Diode in SOD-323

Features

- 350Watts peak pulse power (tp = 8/20µs)
- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2 ±15kV contact ±30kV air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 20A (8/20µs




Applications

- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Pagers Peripherals

Mechanical Data

- SOD323 package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

Schematic & PIN Configuration



CESD323NC5VB-M

CREATEK Microelectronics

Absolute Maximum Rating


Rating	Symbol	Value	Units
Peak Pulse Power (t _p =8/20µs)	P _{PP}	350	Watts
Peak Pulse Current ($t_p = 8/20\mu s$) (note1)	I _{pp}	20	А
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V _{ESD}	30 15	kV
Lead Soldering Temperature	TL	260(10seconds)	°C
Junction Temperature	TJ	-55 to + 150	°C
Storage Temperature	T _{stg}	-55 to + 150 °C	

Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	V _{RWM}				5.0	V
Reverse Breakdown Voltage	V_{BR}	I _T =1mA	6.0			V
Reverse Leakage Current	I _R	V _{RWM} =5V,T=25℃			1	uA
Clamping Voltage	V _C	I _{PP} =20A,t _p =8/20μs			21	V
Junction Capacitance	C _j	$V_R = 0V, f = 1MHz$		20		pF

Electrical Parameters (TA = 25°C unless otherwise noted)

Symbol	Parameter		
I PP	Maximum Reverse Peak Pulse Current		
Vc	Clamping Voltage @ IPP		
VRWM	Working Peak Reverse Voltage		
Ir	Maximum Reverse Leakage Current @ VRWM		
Vbr	Breakdown Voltage @ I⊤		
Iτ	Test Current		



Note:. 8/20µs pulse waveform.

[™]**©REATEK**

CREATEK Microelectronics

Typical Characteristics




Figure 1: Peak Pulse Power vs. Pulse Time

Percent of Rated Power for Ipp


Figure 2: Power Derating Curve

Ambient Temperature - T_A (°C)

Figure3: Pulse Waveform

Figure 4: Clamping Voltage vs.lpp

⁰ 0

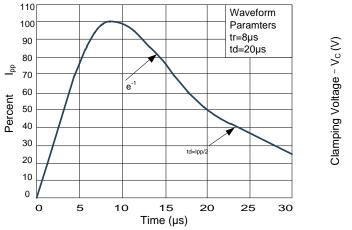


45 r Test Waveform Paramters tr=8µs td=20µs Peak Pulse Current - IPP (A)





CESD323NC5VB-M

CREATEK Microelectronics

Outline Drawing – SOD323







DIMENSIONS					
SYMBOL	MILLIMETER		INCHES		
	MIN	MAX	MIN	MAX	
А	1.600	1.800	0.063	0.071	
В	0.250	0.350	0.010	0.014	
С	2.500	2.700	0.098	0.106	
D		1.000		0.039	
Е	1.200	1.400	0.047	0.055	
F	0.080	0.150	0.003	0.006	
L	0.475 REF		0.019REF		
L1	0.250	0.400	0.010	0.016	
Н	0.000	0.100	0.000	0.004	

Marking



Pin Style: 1. Cathode 2. Anode

Ordering information

Order code	Package	Base qty	Delivery mode
CESD323NC5VB-M	SOD323	3000	Tape and reel

[¤]**@**REATEK

CESD323NC5VB-M

CREATEK Microelectronics

CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, CREATEK does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and CREATEK assumes no liability whatsoever relating to the choice, selection or use of the CREATEK products and services described herein.

CREATEK reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an CREATEK product can reasonably be expected to result in personal injury, death or severe property or environmental damage. CREATEK accepts no liability for inclusion and/or use of CREATEK products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of CREATEK products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by CREATEK for the CREATEK product or service described herein and shall not create or extend in any manner whatsoever, any liability of CREATEK.

CREATEK expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. CREATEK only obligations are those in the CREATEK Standard Terms and Conditions of Sale and in no case will CREATEK be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Specifications are subject to change without notice © Copyright 2009,CREATEK Microelectronics **CREATEK**® is a registered trademark of CREATEK Microelectronics All rights reserved