## EMX1DXV6T1G, EMX1DXV6T5G

# **Dual NPN General Purpose Amplifier Transistor**

This NPN transistor is designed for general purpose amplifier applications. This device is housed in the SOT-563 package which is designed for low power surface mount applications, where board space is at a premium.

#### **Features**

- Reduces Board Space
- High h<sub>FE</sub>, 210–460 (Typical)
- Low V<sub>CE(sat)</sub>, < 0.5 V
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### **MAXIMUM RATINGS** $(T_A = 25^{\circ}C)$

Rating	Symbol	Value	Unit
Collector-Base Voltage	V <sub>(BR)CBO</sub>	60	Vdc
Collector-Emitter Voltage	V <sub>(BR)CEO</sub>	50	Vdc
Emitter-Base Voltage	$V_{(BR)EBO}$	7.0	Vdc
Collector Current – Continuous	I <sub>C</sub>	100	mAdc

#### THERMAL CHARACTERISTICS

Characteristic (One Junction Heated)	Symbol	Max	Unit
Total Device Dissipation  T <sub>A</sub> = 25°C  Derate above 25°C	P <sub>D</sub>	357 (Note 1) 2.9 (Note 1)	mW mW/°C
Thermal Resistance – Junction-to-Ambient	$R_{ heta JA}$	350 (Note 1)	°C/W
Characteristic (Both Junctions Heated)	Symbol	Max	Unit
Total Device Dissipation  T <sub>A</sub> = 25°C  Derate above 25°C	P <sub>D</sub>	500 (Note 1) 4.0 (Note 1)	mW mW/°C
Thermal Resistance – Junction-to-Ambient	$R_{\theta JA}$	250 (Note 1)	°C/W

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1. FR-4 @ Minimum Pad



#### ON Semiconductor®

www.onsemi.com

### DUAL NPN GENERAL PURPOSE AMPLIFIER TRANSISTORS SURFACE MOUNT





SOT-563 CASE 463A STYLE 1

#### **MARKING DIAGRAM**



3X = Specific Device Code

M = Month Code

= Pb-Free Package

(Note: Microdot may be in either location)

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

#### EMX1DXV6T1G, EMX1DXV6T5G

#### **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C)

Characteristic	Symbol	Min	Тур	Max	Unit
Collector-Base Breakdown Voltage ( $I_C = 50 \mu Adc$ , $I_E = 0$ )	V <sub>(BR)CBO</sub>	60	_	-	Vdc
Collector-Emitter Breakdown Voltage $(I_C = 1.0 \text{ mAdc}, I_B = 0)$	V <sub>(BR)CEO</sub>	50	_	-	Vdc
Emitter-Base Breakdown Voltage $(I_E = 50 \mu Adc, I_E = 0)$	V <sub>(BR)EBO</sub>	7.0	_	-	Vdc
Collector-Base Cutoff Current $(V_{CB} = 60 \text{ Vdc}, I_E = 0)$	Ісво	-	_	0.5	μΑ
Emitter-Base Cutoff Current $(V_{EB} = 7.0 \text{ Vdc}, I_{B} = 0)$	I <sub>EBO</sub>	-	_	0.5	μΑ
Collector-Emitter Saturation Voltage (Note 2) $(I_C = 50 \text{ mAdc}, I_B = 5.0 \text{ mAdc})$	V <sub>CE(sat)</sub>	-	_	0.4	Vdc
DC Current Gain (Note 3) (V <sub>CE</sub> = 6.0 Vdc, I <sub>C</sub> = 1.0 mAdc)	h <sub>FE</sub>	120	_	560	-
Transition Frequency ( $V_{CE} = 12 \text{ Vdc}, I_{C} = 2.0 \text{ mAdc}, f = 30 \text{ MHz}$ )	f <sub>T</sub>	-	180	_	MHz
Output Capacitance (V <sub>CB</sub> = 12 Vdc, I <sub>C</sub> = 0 Adc, f = 1 MHz)	СОВ	-	2.0	-	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Device mounted on a FR-4 glass epoxy printed circuit board using the minimum recommended footprint.

#### **ORDERING INFORMATION**


Device	Package	Shipping <sup>†</sup>
EMX1DXV6T1G	SOT-563 (Pb-Free)	4000 Units / Tape & Reel
EMX1DXV6T5G	SOT-563 (Pb-Free)	8000 Units / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>3.</sup> Pulse Test: Pulse Width  $\leq 300 \,\mu\text{s}$ , D.C.  $\leq 2\%$ .

#### EMX1DXV6T1G, EMX1DXV6T5G

#### TYPICAL ELECTRICAL CHARACTERISTICS

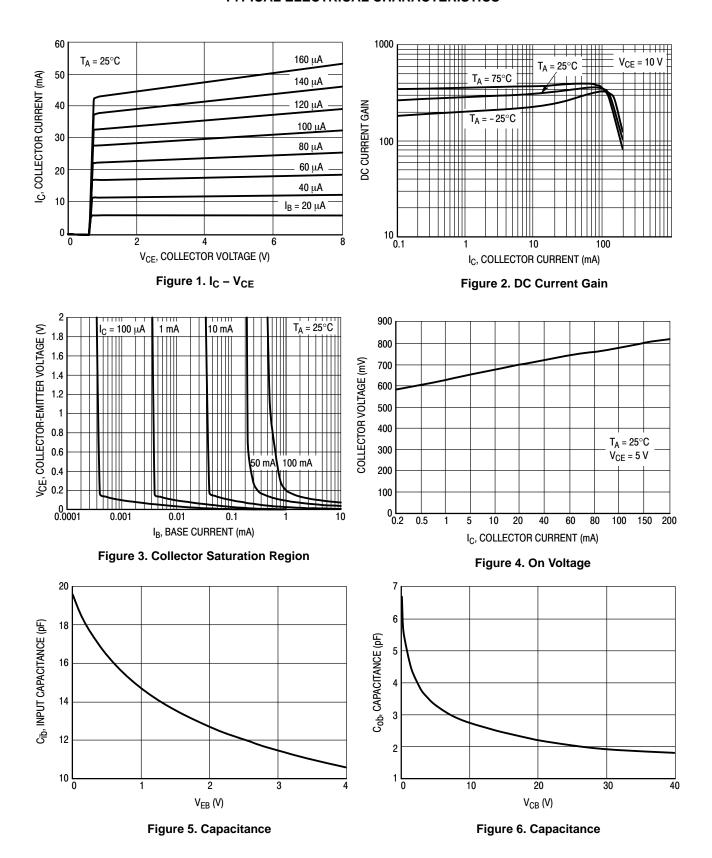

## MECHANICAL CASE OUTLINE

PACKAGE DIMENSIONS






#### SOT-563, 6 LEAD CASE 463A ISSUE H

**DATE 26 JAN 2021** 

#### NOTES:

- I. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
- 2. CONTROLLING DIMENSION: MILLIMETERS
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

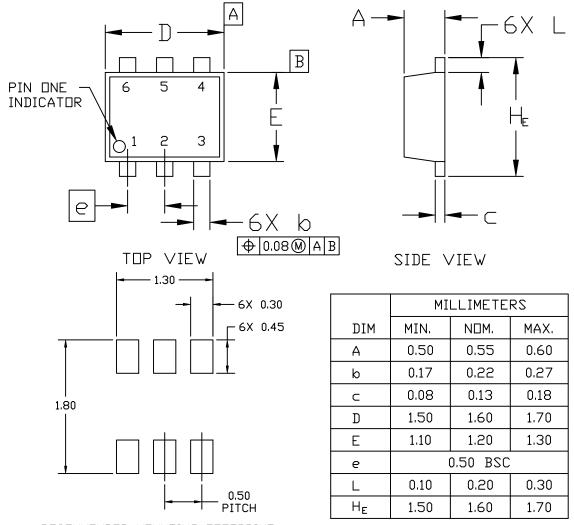

#### RECOMMENDED MOUNTING FOOTPRINT\*

For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

DOCUMENT NUMBER:	98AON11126D	Electronic versions are uncontrolled except when accessed directly from the Document Reposit Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-563, 6 LEAD		PAGE 1 OF 2	

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

#### **SOT-563, 6 LEAD**

CASE 463A ISSUE H

2

1

**DATE 26 JAN 2021** 

STYLE 1: PIN 1. EMITTER 1 2. BASE 1 3. COLLECTOR 2 4. EMITTER 2 5. BASE 2 6. COLLECTOR 1	STYLE 2: PIN 1. EMITTER 1 2. EMITTER 2 3. BASE 2 4. COLLECTOR 2 5. BASE 1 6. COLLECTOR 1	STYLE 3: PIN 1. CATHODE 1 2. CATHODE 1 3. ANODE/ANODE 4. CATHODE 2 5. CATHODE 2 6. ANODE/ANODE
STYLE 4: PIN 1. COLLECTOR 2. COLLECTOR 3. BASE 4. EMITTER 5. COLLECTOR 6. COLLECTOR	STYLE 5: PIN 1. CATHODE 2. CATHODE 3. ANODE 4. ANODE 5. CATHODE 6. CATHODE	STYLE 6: PIN 1. CATHODE 2. ANODE 3. CATHODE 4. CATHODE 5. CATHODE 6. CATHODE
STYLE 7: PIN 1. CATHODE 2. ANODE 3. CATHODE 4. CATHODE 5. ANODE 6. CATHODE	STYLE 8: PIN 1. DRAIN 2. DRAIN 3. GATE 4. SDURCE 5. DRAIN 6. DRAIN	STYLE 9: PIN 1. SDURCE 1 2. GATE 1 3. DRAIN 2 4. SDURCE 2 5. GATE 2 6. DRAIN 1
STYLE 10: PIN 1. CATHODE 1 2. N/C 3. CATHODE 2 4. ANODE 2 5. N/C 6. ANODE 1	STYLE 11: PIN 1. EMITTER 2 2. BASE 2 3. COLLECTOR 1 4. EMITTER 1 5. BASE 1 6. COLLECTOR 2	

## GENERIC MARKING DIAGRAM\*



XX = Specific Device CodeM = Month Code= Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON11126D	Electronic versions are uncontrolled except when accessed directly from the Document Reposito Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-563, 6 LEAD		PAGE 2 OF 2	

ON Semiconductor and III are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative