

ITEM :

CRYSTAL RESONATOR

TYPE :

DST210A

NOMINAL FREQUENCY :

32. 768kHz

SPEC No. :

1TJG125DR1A019

Please acknowledge receipt of this specification by signing and returning a copy to us.

	RECEIPT
DATE	
RECEIVED	(signature) (name)




1. ELECTRICAL CHARACTERISTICS (This test shall be performed under the conditions of temp.at	+25±3°C,Relative humidity 60%max.)
1.1. NOMINAL FREQUENCY	32.768 kHz
1.2. OVERTONE ORDER	Fundamental
1.3.LOADING CAPACITANCE(CL)	12.5pF
1.4. FREQUENCY TOLERANCE	±20 ×10 ⁻⁶ max. (at +25±3°C)
1.5. DRIVE LEVEL	0.2 µW ± 20% (1µW max.)
1.6. SERIES RESISTANCE	90 k Ω max. (at Series)
1.7. TURNOVER TEMPERATURE	+25 ±5°C
1.8. PARABOLIC COEFFICIENT	-0.04×10 ⁻⁶ / °C ² max.
1.9. SHUNT CAPACITANCE	1.0 pF typ.
1.10. OPERATING TEMPERATURE RANGE	-40 ~ +85 °C
1.11. STORAGE TEMPERATURE RANGE	-40 ~ +85 °C
1.12. INSULATION RESISTANCE	500 M Ω min. (at DC100±15V)

Title DST210A TYPE QUARTZ CRYSTAL SPECIFICATION	Remark		
Date 2014/05/09	Spec No.	Rev.	Page
	1TJG125DR1A0019	-	1 / 12


2. DIMENSIONS AND MARKING


2.1. DIMENSIONS

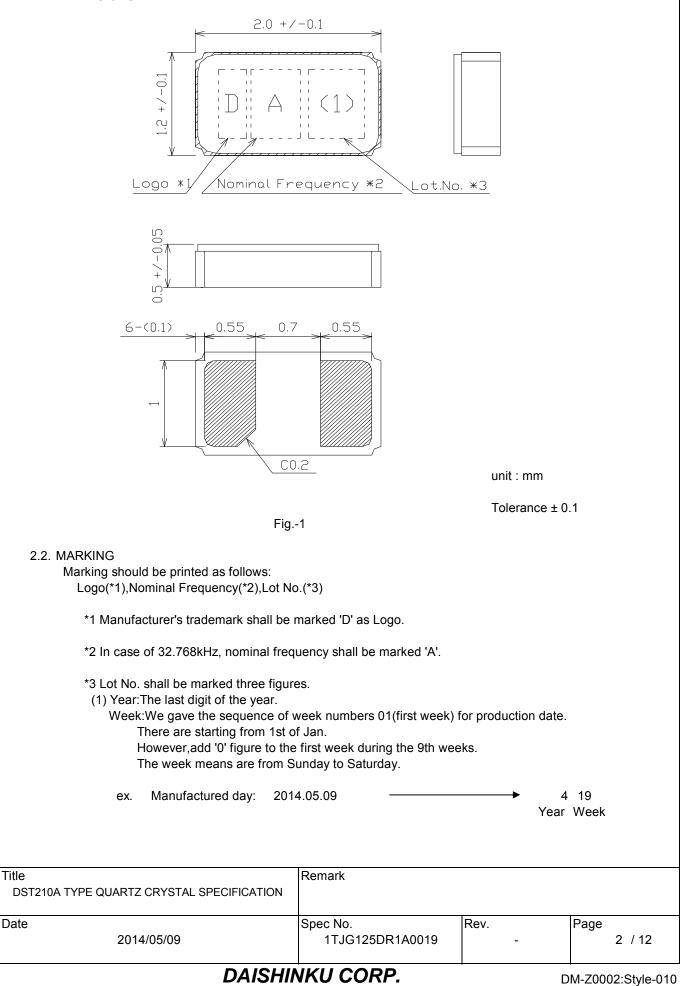

3. PACKING

3.1. EMBOSS CARRIER TAPE & REEL



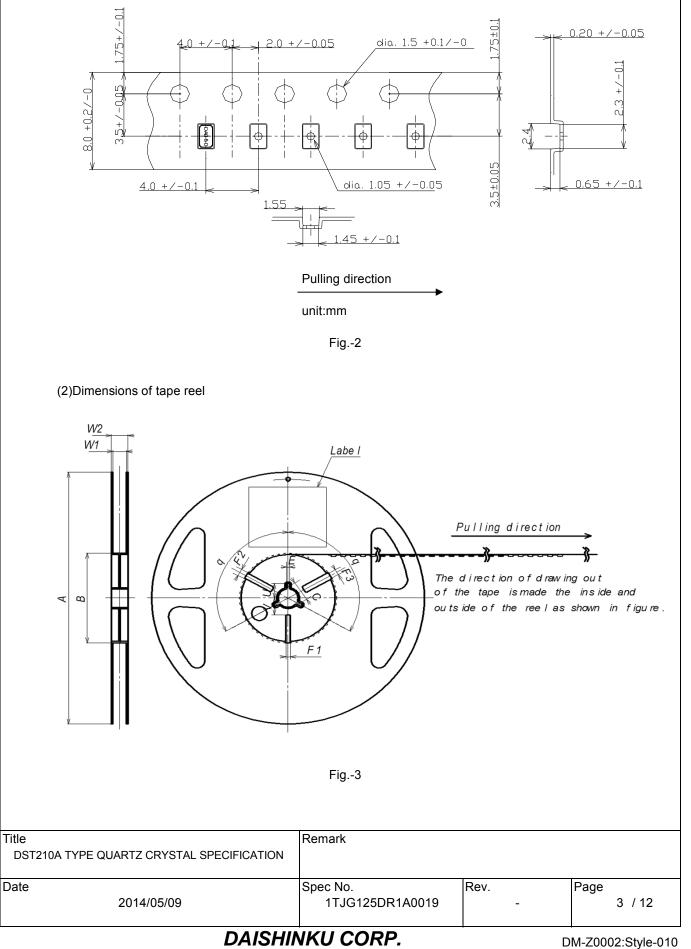

				unit:mm
	Item		Mark	Dimensions / Angle
	Dian	neter	Α	Ф180 +0 -3.0
Flange	Inside	width	W1	9.0 ± 0.3
	Outsid	e width	W2	11.4 ± 1.0
	Out Line	diameter	В	Ф60 +1.0 -0
			F1	3.0 ± 0.2
	Center	Width	F2	4.0 ± 0.2
	core slit		F3	5.0 ± 0.2
Center Core		Length	V	11.9
		Position	q	120 °
	Spindle	Spindle diameter		Φ13 ± 0.2
		Width	E	2.0 ± 0.5
	key Seats	Length	U	10.5 ± 0.4
			q	120 °
	Indicatio	n of type	Sticker	label on one side of flange

(3)Storage Condition

Temperature;+40°C max.,Relative Humidity;80% max. Storage Period:6months max.

(4)Standard packing quantity 3,000pcs./reel for Φ180

(5)Material of the tape

tape	Material
Carrier tape	Polystyrene,Carbon
Cover tape	Polyethylene

(6)Label	Contents
----------	----------



Stick a label on the each reel.


Title DST210A TYPE QUARTZ CRYSTAL SPECIFICATION	Remark		
Date 2014/05/09	Spec No.	Rev.	Page
	1TJG125DR1A0019	-	4 / 12

Leader	Cover tape	The length of cover tape in the leader is more than 400mm	1
_	O minuters a	including empty embossed area.	
	Carrier tape	After all products were packaged, must remain more than twenty pieces or 400mm empty embossed area, which sho	uld be sealed
		by cover tape.	ulu be sealed
Terminal	Cover tape	The tip of cover tape shall be fixed temporary by paper	
		tape and roll around the core of reel one round.	
	Carrier tape	The empty embossed area which are sealed by cover tap	e
		must remain more than 40mm.	
	Tanadaal	Component Leader	
\leftarrow	Terminal	Component Leader	
		$\leq \leq$	
	Empty Components	Unreeling direction Empty Components	
	\leftarrow	\longrightarrow Cover tap	е
		$ \longrightarrow $	
		/ Carrier tap)e
		Fig4	
		Fig4	
		Fig4 be should not be jointed.	
The carr	ier tape and cover tap	be should not be jointed.	
The carr (9)Releas	ier tape and cover tap se strength cover tape	be should not be jointed.	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 168	be should not be jointed. er following condition. 5~180 °	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape tween 0.1~0.7N unde Pulling direction 168 Speed 300	be should not be jointed. er following condition. 5~180 ° 0mm/min	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 168	be should not be jointed. er following condition. 5~180 ° 0mm/min	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 16 Speed 300 Otherwise unless spec	be should not be jointed. er following condition. 5~180 ° 0mm/min cifiied	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape tween 0.1~0.7N unde Pulling direction 168 Speed 300	be should not be jointed. er following condition. 5~180 ° 0mm/min	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 16 Speed 300 Otherwise unless spec	be should not be jointed. er following condition. 5~180 ° 0mm/min cifiied	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 16 Speed 300 Otherwise unless spec	be should not be jointed. er following condition. 5~180 ° 0mm/min cifiied	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 16 Speed 300 Otherwise unless spec	be should not be jointed. er following condition. 5~180 ° 0mm/min cifiied	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 16 Speed 300 Otherwise unless spec	be should not be jointed. er following condition. $5 \sim 180^{\circ}$ 0mm/min cifiied Pulling direction	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 16 Speed 300 Otherwise unless spec	be should not be jointed. er following condition. 5~180 ° 0mm/min cifiied	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 16 Speed 300 Otherwise unless spec	be should not be jointed. er following condition. $5 \sim 180^{\circ}$ 0mm/min cifiied Pulling direction	
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 16 Speed 300 Otherwise unless spec	be should not be jointed. er following condition. $5 \sim 180^{\circ}$ 0mm/min cifiied Pulling direction	
The carr (9)Releas It has be !	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 169 Speed 300 Otherwise unless spec 165~180 °	be should not be jointed. ar following condition. $5 \sim 180^{\circ}$ Omm/min cified Pulling direction Fig5	
The carr (9)Releas It has be !	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 169 Speed 300 Otherwise unless spec 165~180 °	be should not be jointed. er following condition. $5 \sim 180^{\circ}$ 0mm/min cifiied Pulling direction	oss carrier tape.
The carr (9)Releas It has be !	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 169 Speed 300 Otherwise unless spec 165~180 °	be should not be jointed. ar following condition. $5 \sim 180^{\circ}$ Omm/min cified Pulling direction Fig5	oss carrier tape.
The carr (9)Releas It has be !	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 169 Speed 300 Otherwise unless spec 165~180 °	be should not be jointed. ar following condition. $5 \sim 180^{\circ}$ Omm/min cified Pulling direction Fig5	oss carrier tape.
The carr (9)Releas It has be !	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 169 Speed 300 Otherwise unless spec 165~180 °	be should not be jointed. ar following condition. $5 \sim 180^{\circ}$ Omm/min cified Pulling direction Fig5	oss carrier tape.
The carr (9)Releas It has be !	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 169 Speed 300 Otherwise unless spec 165~180 °	be should not be jointed. ar following condition. $5 \sim 180^{\circ}$ Omm/min cified Pulling direction Fig5	oss carrier tape.
The carr (9)Releas It has be !	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 169 Speed 300 Otherwise unless spec 165~180 °	be should not be jointed. er following condition. $5 \sim 180 \degree$ Omm/min cified fig5 Pulling direction Fig5 all,when tear away the cover tape with upside-down the emb	oss carrier tape.
The carr (9)Releas It has be	e strength cover tape etween 0.1~0.7N unde Pulling direction 165 Speed 300 Otherwise unless spect 165~180 °	er following condition. 5~180 ° 0mm/min cified Pulling direction Fig5 all,when tear away the cover tape with upside-down the emb	oss carrier tape.
The carr (9)Releas It has be	ier tape and cover tap e strength cover tape etween 0.1~0.7N unde Pulling direction 169 Speed 300 Otherwise unless spec 165~180 °	er following condition. 5~180 ° 0mm/min cified Pulling direction Fig5 all,when tear away the cover tape with upside-down the emb	oss carrier tape.
(9)Releas	e strength cover tape etween 0.1~0.7N unde Pulling direction 165 Speed 300 Otherwise unless spect 165~180 °	er following condition. 5~180 ° 0mm/min cified Pulling direction Fig5 all,when tear away the cover tape with upside-down the emb	oss carrier tape.

DM-Z0002:Style-010

3.2. PACKING

(1)The way of packing and label

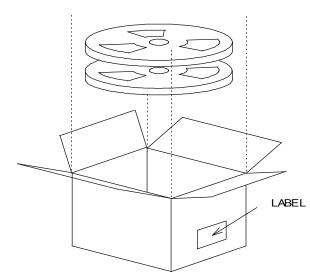


Label contents The type of product Lot No. Specification Quantity Shipment Day Remark



(2)The size of packing carton

There may be different size of packing carton used depending on the lot size. Also,the product packed inside shall be protected by air cushion.

Title DST210A TYPE QUARTZ CRYSTAL SPECIFICATION	Remark		
Date 2014/05/09	Spec No.	Rev.	Page
	1TJG125DR1A0019	-	6 / 12

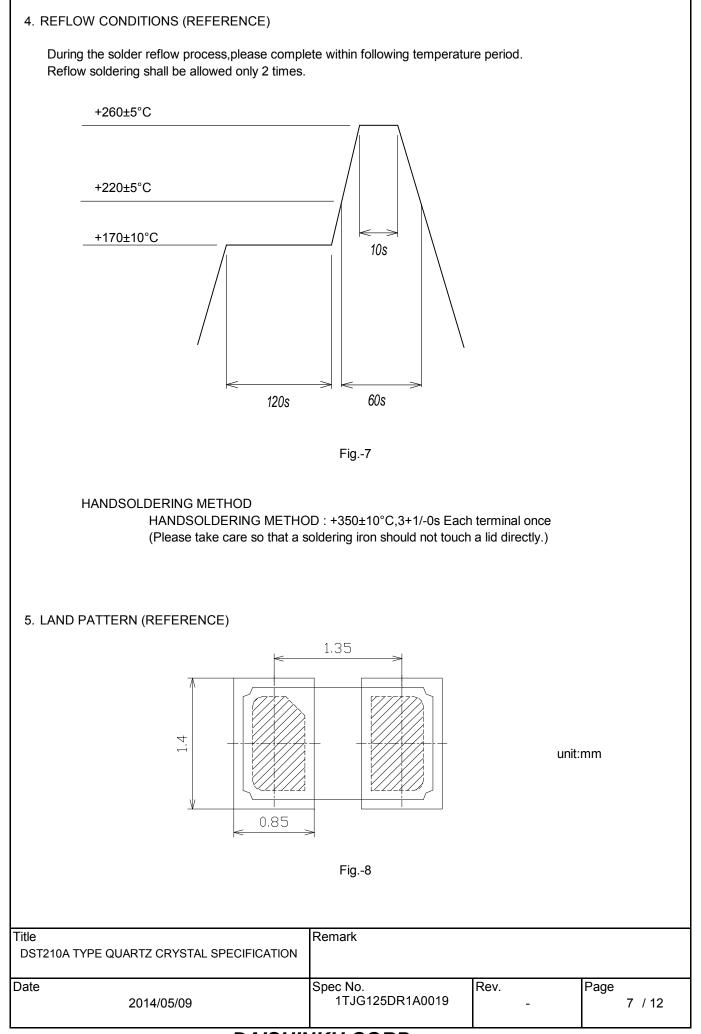

DAISHINKU CORP.


DM-Z0002:Style-010

6. MECHANICAL ENDURANCE 6.1. SHOCK After the following test, parts shall conform specification table-2-B. 3times free drop from 75cm heights to hard wood board of minimum thickness 30mm. 6.2. VIBRATION After the following test, parts shall conform specification table-2-B, and no abnormal appearance shall be observed. (1)Frequency of Vibration : 10~55Hz 1~2min (2)Amplitude total : 1.5mm (3)Vibration axis : X,Y,Z (4)Vibration period : 2h for X,Y,Z axis 6.3. SUBSTRATE BENDING After the following test, parts shall conform specification table-2-B, 20 and no abnormality shall be observed in external appearance and sealing tightnen and others shall be based on ET-7403 of EIAJ. pressure jig R230 Mount the specimen on substrate. Apply the following pressure Direction : see Fig.-9 P.C.B. Speed : 0.5mm/s Hours : 5±1s Amount of substrate: 3mm max. 45+/-2 45+/-2 Fig.-9 6.4. SHEAR After the following test, parts shall conform specification table-2-B, and no abnormality shall be observed in external appearance and sealing P.C.B. pressure jig tightness and others shall be based on ET-7403 of EIAJ. Mount the specimen on substrate. Apply the following pressure Pressure jig : R0.5 R0.5 specimen Weight : 10N Hours :10±1s Direction : see Fig.-10 Fig.-10 Title Remark DST210A TYPE QUARTZ CRYSTAL SPECIFICATION Spec No. Rev. Date Page 1TJG125DR1A0019 2014/05/09 8 / 12

DAISHINKU CORP.

DM-Z0002:Style-010

6.5. BODY STRENGTH After the following test,parts shall conform and no abnormality shall be observed in tightnen and others shall be based on ET Mount the specimen on substrate. Apply the following pressure	external appearance		ng	
Pressure jig : R0.5 Weight : 10N Hours : 10±1s Direction : see Fig11		Ţ	R0.5	sure jig ecimen
	L L >= W	Fig1	0.5L L	
6.6. SEAL Less than 2.0×10 ⁻⁹ Pa*m ³ /s by Helium k Also,no bubble is observed by Fluoriner				
 6.7. SOLDERABILITY After the following test. More than 90% 3±1s dip in +235±5°C solder. (Use rosin type flux for solder.) 	of lead shall be cove	ered by nev	w solder.	
6.8. RESISTANCE TO SOLDERING HEAT (R 48h past at room temperature from foll shall conform specification table-2-C. perform the attached reflow conditions	owing test,parts			
 6.9. RESISTANCE TO SOLDERING HEAT (H 48h past at room temperature from foll shall conform specification table-2-C. +350±10°C,3+1/-0s Each terminal once 	owing test,parts	METHOD)	
itle	Remark			
DST210A TYPE QUARTZ CRYSTAL SPECIFICATION				1-
ate 2014/05/09	Spec No. 1TJG125DR1	A0019	Rev.	Page 9 / 12

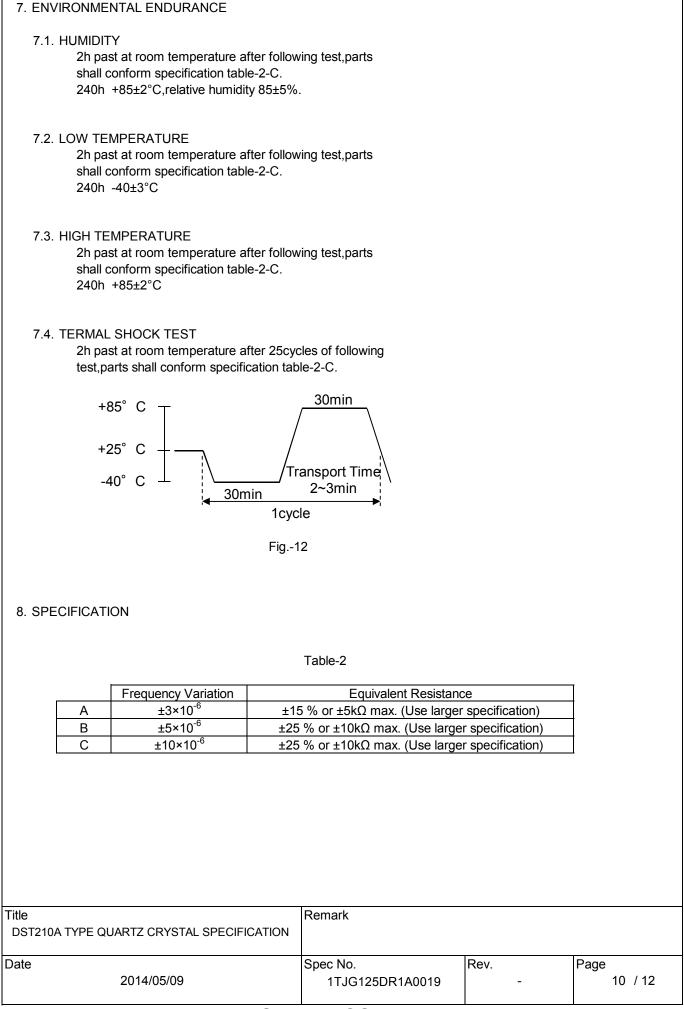

9. THE CAUTIONS ON USE FOR DST210A

9.1. SOLDERING

Please perform reflow conditions within 2 times.

9.2. MOUNT

Crystal products are designed to be compatible with automatic mounting. Be sure to have a mounting test in advance by using the actual mounting machine and check that the characteristics of the products are not damaged by the automatic mounting.

In the process where the boad is warped, such as board separation process, be careful that the warping does not influence the characteristics and soldering of crystal products.

Since mounting by Ultrasonic welding and processing have a possibility of an excessive vibration spreading inside a tuning fork crystal resonator and becoming the cause of characteristic deterioration and not oscillating, it does not recommend.

9.3. WASHING

About use of the washing liquid of a basin system, an alcoholic system,and a chlorofluorocarbon-replacing material system,it is checking that it is satisfactory. However please consult in advance about other washing liquid. Tuning fork crystal resonators should not have ultrasonic washing because their frequency band is close to the washing frequency band of ultrasonic washing machines,very probably causing resonance destruction. To use ultrasonic washing to clean these resonators, tests must be performed in advance under actual application conditions.

9.4. DRIVE LEVEL

The piece of crystal it is processed very smaller than the conventional thing inside DST210A series crystal unit may be damaged, if crystal resonators are exposed to an excessively high drive level. Please use the products within the limits specified in the catalogs and specifications.

9.5. HANDLING OF A PRODUCT

DST210A series has sufficient intensity to fall and vibration. Crystal resonators should not have pattern to avoid causing base crack.

9.6. STORAGE

Since the solderability of pins may deteriorate, please avoid storage in high-temperature, high-humidity place. Please store crystal products in a place free from direct sunlight and condensation.

Title DST210A TYPE QUARTZ CRYSTAL SPECIFICATION	Remark		
Date 2014/05/09	Spec No.	Rev.	Page
	1TJG125DR1A0019	-	11

2014-0510 REVISION RECORD

Rev.No	Date	Reason	Contents	Approved	Checked	Drawn
-	2014/05/09	-	The first edition.	T.Nakamura	T.Fujii	H.Ishihara
						0002.5tvle-008