EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

Side View SMD LEDs

Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Pb-free.

EVERLIGHT

• The product itself will remain with RoHS compliant version

Descriptions

The 57-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.


Applications

- OA Equipment
- Backlighting of Full Color LCD
- Replacement of Conventional Light Bulbs and Fluorescent Lamps

Device Selection Guide

(Lens Color	
Material	Material Emitted Color	
AlGaInP	Brilliant Yellow Green	Water Clear

Everlight Electronics Co., Ltd. Device No. :DSE-571-005 http://www.everlight.com Date:17-Jul-2006





57-21/G6C-BN2Q1B/EE



Package Dimensions

3.54 1.54 2.55 3.55 З.З 2.9 3.05 2.2 Polarity 4.0 Ш____ 3.95 3.45 2.55 5.5 0 4 2,2 1.9 Cathode mark 4.0 4.2 3.05 3 3.55 4.50 1.0 1.0 1.7

Recommended soldering pad design

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd.	http://www.everlight.com	Rev. 1	Page:2	of 10
Device No. :DSE-571-005	Date:17-Jul-2006	Prepared by: Rita	Shen	

Absolute Maximum Ratings (Ta=25°C)

Absolute Maximur	n kating	s(1a=25)	,)			
Para	meter		Symbol]	Rating	Unit
Reverse	e Voltage		Vr	5		V
Forward	d Current		IF	25		mA
Operating 7	Temperatu	re	Topr	-40 ~ +85		°C
Storage T	emperature)	Tstg	-40 ~+100		°C
Electrostatic D	vischarge(H	IBM)	ESD		2000	V
Power D	oissipation		Pd	60		mW
Peak Forward Current (Duty 1/10 @1KHz)		IFP	60		mA	
Soldering Temperature		Tsol	Reflow Soldering : 260 °C for 10 sec Hand Soldering : 350 °C for 3 sec			
Electro-Optical Ch	naracteri	stics (Ta=2	5°C)			
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	36.0		90.0	mcd	I _F =20mA
Viewing Angle	$2\theta_{1/2}$		120		deg	I _F =20mA
Peak Wavelength	λp		575		nm	I _F =20mA
Dominant Wavelength	λd	567.5		575.5	nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	I _F =20mA
Forward Voltage	V _F	1.75		2.35	V	I _F =20mA
Reverse Current	I _R			10	μΑ	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±10%

- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. Device No. :DSE-571-005 http://www.everlight.com

Date:17-Jul-2006

Rev. 1 Page:3 of 10

Prepared by: Rita Shen

Bin Range Of Dominant Wavelength

Group	Bin Code	Min.	Max.	Unit	Condition
В	C15	567.5	569.5	nm	
	C16	569.5	571.5		L-20m A
	C17	571.5	573.5		IF=20mA
	C18	573.5	575.5		

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
N2	36.0	45.0		
P1	45.0	57.0	mad	I_{-20m}
P2	57.0	72.0	mcd	IF=20mA
Q1	72.0	90.0		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition
	0	1.75	1.95		
В	1	1.95	2.15	V	IF=20mA
	2	2.15	2.35		

Notes:


1. Tolerance of Dominant Wavelength ±1nm

2. Tolerance of Luminous Intensity ±10%

3.Tolerance of Forward Voltage ±0.1V



Typical Electro-Optical Characteristics Curves

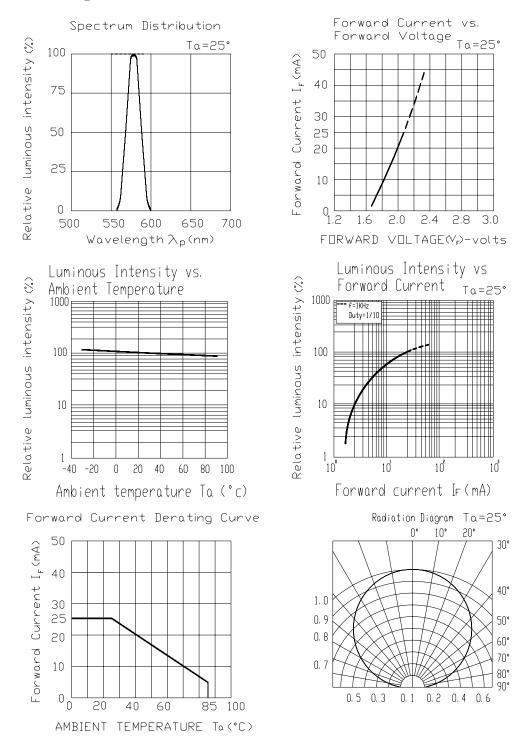

Everlight Electronics Co., Ltd. Device No. :DSE-571-005 http://www.everlight.com Date:17-Jul-2006 Rev. 1 Page:5 of 10 Prepared by: Rita Shen




EVERLIGHT ELECTRONICS CO.,LTD.


57-21/G6C-BN2Q1B/EE

Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**

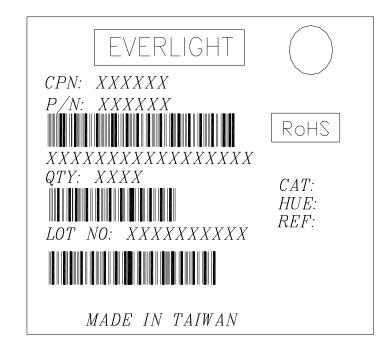


Reel Dimensions

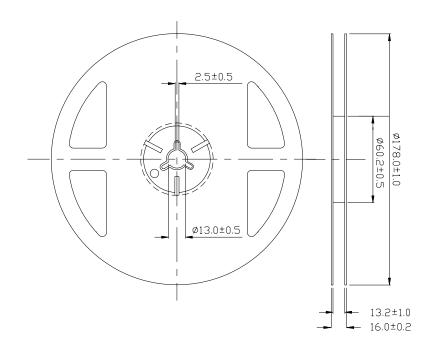

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. Device No. :DSE-571-005 http://www.everlight.com Date:17-Jul-2006 Rev. 1 Page:6 of 10 Prepared by: Rita Shen

Carrier Tape Dimensions: Loaded quantity 800 PCS per reel.

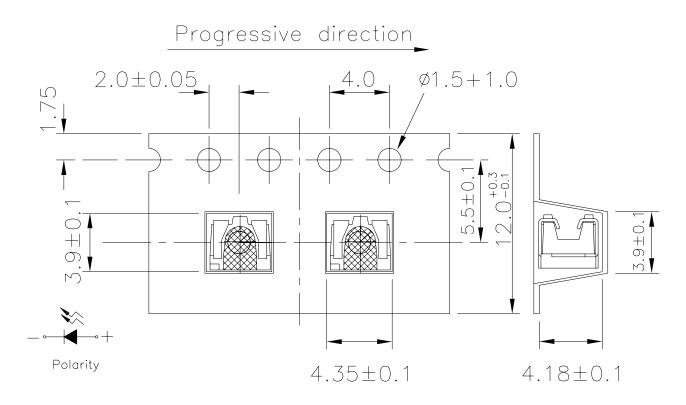

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

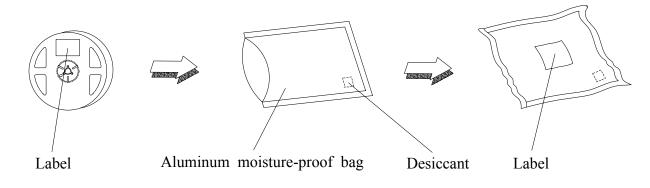

Everlight Electronics Co., Ltd. Device No. :DSE-571-005 http://www.everlight.com Date:17-Jul-2006 Rev. 1 Page:7 of 10 Prepared by: Rita Shen



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1


http://www.everlight.com Date:17-Jul-2006

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

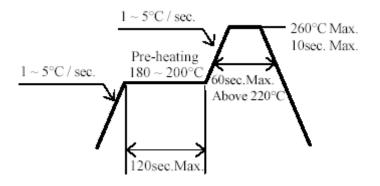

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron


Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd.	http://www.everlight.com	Rev. 1 Page:9	of 10
Device No. :DSE-571-005	Date:17-Jul-2006	Prepared by: Rita Shen	



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

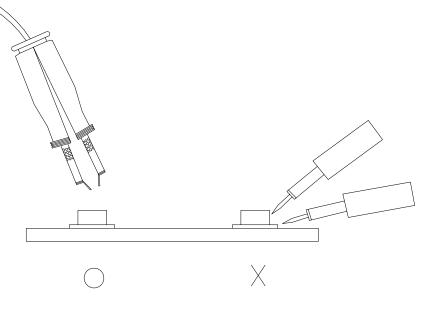

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. :DSE-571-005 http://www.everlight.com Date:17-Jul-2006 Rev. 1 Page:10 of 10 Prepared by: Rita Shen