

## **Technical Data Sheet**

# 1.8mm round Subminiature Chip LED

### 42-21A/S2C-ATW/1T

### **Features**

- Package in 12mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-Free.
- The product itself will remain within RoHS compliant version.

### **Descriptions**

- The 42-21A SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications, etc.


### **Applications**

- backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device No.: DSE-

### **Device Selection Guide**


| C                      | Lens Color       |             |
|------------------------|------------------|-------------|
| Material Emitted Color |                  |             |
| AlGaInP                | Brilliant Orange | Water Clear |





Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 1 of 10

Prepared date: 30-Mar-2006 Prepared by: Jay Chou


## **Package Outline Dimensions**












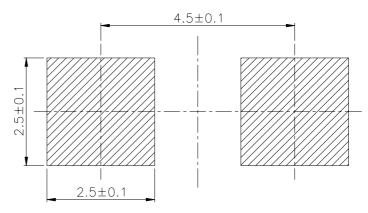

Rev. 1.0

**Note:** Tolerances Unless Dimension  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Page: 2 of 10 Device No.: DSE-Prepared date: 30-Mar-2006 Prepared by: Jay Chou



## **Absolute Maximum Ratings (Ta=25°C)**

| Parameter                              | Symbol     | Rating  | Unit                    |  |
|--|------------|---|-------------------------|--|
| Reverse Voltage                        | VR         | 5   | V                       |  |
| Forward Current                        | <b>I</b> F | 25  | mA                      |  |
| Operating Temperature                  | Topr       | -40 ~ +85   | $^{\circ}\!\mathbb{C}$  |  |
| Storage Temperature                    | Tstg       | -40 ~ +90   | $^{\circ}\! \mathbb{C}$ |  |
| Electrostatic Discharge(HBM)           | ESD        | 2000  | V                       |  |
| Power Dissipation                      | Pd         | 60  | mW                      |  |
| Peak Forward Current (Duty 1/10 @1KHz) | Ifp        | 60  | mA                      |  |
| Soldering Temperature                  | Tsol       | Reflow Soldering: 260 °C for 10 sec.  Hand Soldering: 350 °C for 3 sec. |                         |  |

## **Electro-Optical Characteristics (Ta=25°C)**

|                              | G 1 1        | 3.61  | <b>T</b> | 3.6   | TT *.   | G 11                 |
|------------------------------|--------------|-------|----------|-------|---------|----------------------|
| Parameter                    | Symbol       | Min.  | Typ.     | Max.  | Unit    | Condition            |
| Luminous Intensity           | Iv           | 285   |          | 1800  | mcd     |                      |
| Viewing Angle                | 2 \theta 1/2 |       | 30       |       | deg     |                      |
| Peak Wavelength              | λр           |       | 611      |       | nm      |                      |
| Dominant Wavelength          | λd           | 600.5 |          | 612.5 | nm      | I <sub>F</sub> =20mA |
| Spectrum Radiation Bandwidth | Δλ           |       | 17       |       | nm      |                      |
| Forward Voltage              | VF           |       | 2.0      | 2.4   | V       |                      |
| Reverse Current              | Ir           |       |          | 10    | $\mu$ A | V <sub>R</sub> =5V   |

### **Notes:**

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 3 of 10



## Bin Range Of Dom. Wavelength

| Groups | Bin | Min   | Max   | Unit | Condition |
|--------|-----|-------|-------|------|-----------|
| A      | D8  | 600.5 | 603.5 |      | IF=20mA   |
|        | D9  | 603.5 | 606.5 |      |           |
|        | D10 | 606.5 | 609.5 | nm   |           |
|        | D11 | 609.5 | 612.5 |      |           |

## **Bin Range Of Luminous Intensity**


| Bin | Min  | Max  | Unit | Condition |
|-----|------|------|------|-----------|
| T   | 285  | 450  |      | IF=20mA   |
| U   | 450  | 715  | 1    |           |
| V   | 715  | 1120 | mcd  |           |
| W   | 1120 | 1800 |      |           |

### **Notes:**

- 1.Tolerance of Dominant Wavelength ±1nm
- 2.Tolerance of Luminous Intensity ±10%

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 4 of 10

### **Typical Electro-Optical Characteristics Curves**

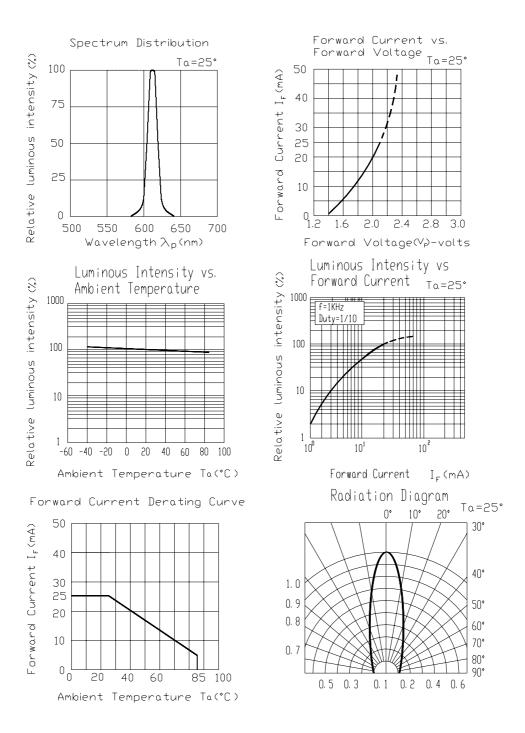


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 5 of 10 Device No.: DSE- Prepared date: 30-Mar-2006 Prepared by: Jay Chou

### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 




### **Reel Dimensions**

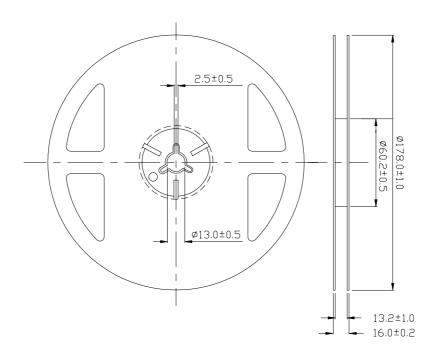

**Note:** Tolerances Unless Dimension  $\pm 0.1$ mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 6 of 10

## Carrier Tape Dimensions: Loaded quantity 1000 PCS per reel

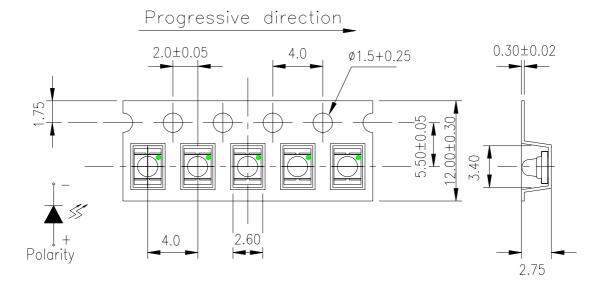

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## **Moisture Resistant Packaging**

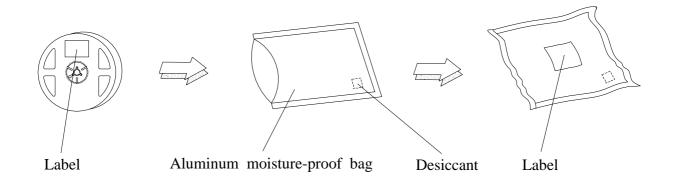

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 7 of 10



## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

| No. | Items                               | Test Condition  | Test<br>Hours/Cycles | Sample<br>Size | Ac/Re |
|-----|-------------------------------------|---|----------------------|----------------|-------|
| 1   | Reflow Soldering                    | Temp. : 260°C±5°C<br>Min. 5sec.   | 6 Min.               | 22 PCS.        | 0/1   |
| 2   | Temperature Cycle                   | $H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min       | 300 Cycles           | 22 PCS.        | 0/1   |
| 3   | Thermal Shock                       | $H: +100^{\circ}\mathbb{C}$ 5min<br>$\int 10 \sec$<br>$L: -10^{\circ}\mathbb{C}$ 5min | 300 Cycles           | 22 PCS.        | 0/1   |
| 4   | High Temperature<br>Storage         | Temp. : 100°C   | 1000 Hrs.            | 22 PCS.        | 0/1   |
| 5   | Low Temperature<br>Storage          | Temp. : -40°ℂ   | 1000 Hrs.            | 22 PCS.        | 0/1   |
| 6   | DC Operating Life                   | $I_F = 20 \text{ mA}$   | 1000 Hrs.            | 22 PCS.        | 0/1   |
| 7   | High Temperature /<br>High Humidity | 85°C / 85%RH  | 1000 Hrs.            | 22 PCS.        | 0/1   |

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 8 of 10

#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
  - 2.3 The LEDs should be used within a year.
  - 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
  - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
  - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

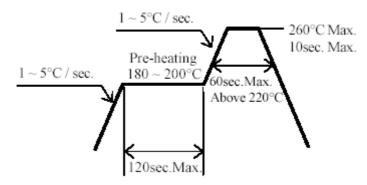

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 9 of 10

Device No.: DSE- Prepared date: 30-Mar-2006 Prepared by: Jay Chou




### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

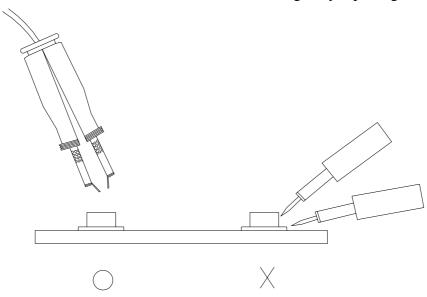

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 10 of 10