EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

0603 Package chip LED (0.6mm Height)

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow
 - solder process.
- Mono-color type.
- Pb-free.

Descriptions

- The 19-213 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.


Device Selection Guide

	C		
Part No.	Material	Emitted Color	Lens Color
19-213/Y2C-CQ1R1L/3T	AlGaInP	Brilliant Yellow	Water Clear





Package Outline Dimensions

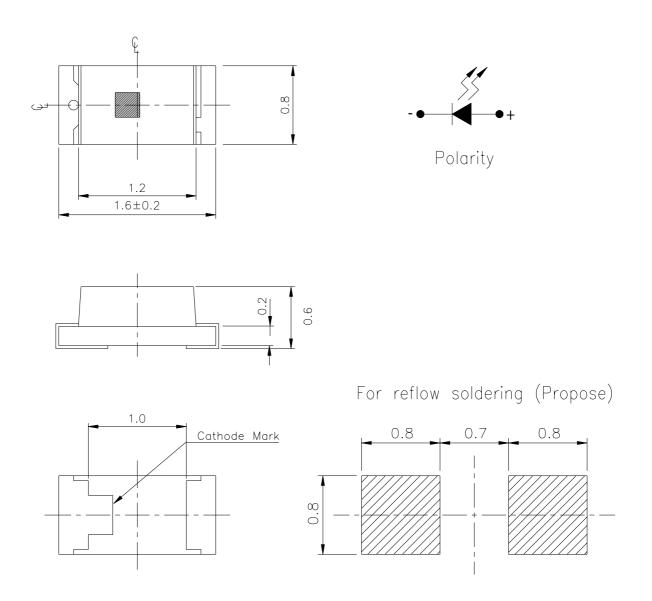

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-193-Y11 http://www.everlight.com Prepared date: 06-Jan-2005 Rev.1 Page: 2 of 10 Prepared by: Jessica Chang EVERLIGHT ELECTRONICS CO.,LTD.

19-213/Y2C-CQ1R1L/3T

Absolute Maximum Ratings (Ta=25°C)

VERLIGHT

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +90	°C
Soldering Temperature	Tsol	260 (for 5 seconds)	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	60	mA

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	72.0		140.0	mcd		
Peak Wavelength	λp		591		nm		
Dominant Wavelength	λd	585.5		591.5	nm		
Spectrum Radiation Bandwidth	$ riangle \lambda$		15		nm	IF=20mA	
Viewing Angle	2 0 1/2		120		deg		
Forward Voltage	VF	1.70		2.30	V		
Reverse Current	Ir			10	μA	V _R =5V	

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. Device No. : DSE-193-Y11 http://www.everlight.com Prepared date: 06-Jan-2005 EVERLIGHT ELECTRONICS CO.,LTD.

19-213/Y2C-CQ1R1L/3T

Bin Range Of Dom. Wavelength

EVERLIGHT

Groups	Bin	Min	Max	Unit	Condition
С	D3	585.5	588.5		I 20 A
	D4	588.5	591.5	nm	IF=20mA

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
Q1	72.0	90.0		
Q2	90.0	112.0	mcd	IF=20mA
R1	112.0	140.0		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition	
L	19	1.70	1.80			
	20	1.80	1.90	V	IF=20mA	
	21	1.90	2.00			
	22	2.00	2.10			
	23	2.10	2.20			
	24	2.20	2.30			

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.05V

EVERLIGHT ELECTRONICS CO., LTD.

19-213/Y2C-CQ1R1L/3T

Typical Electro-Optical Characteristics Curves

ÆRLIGHT

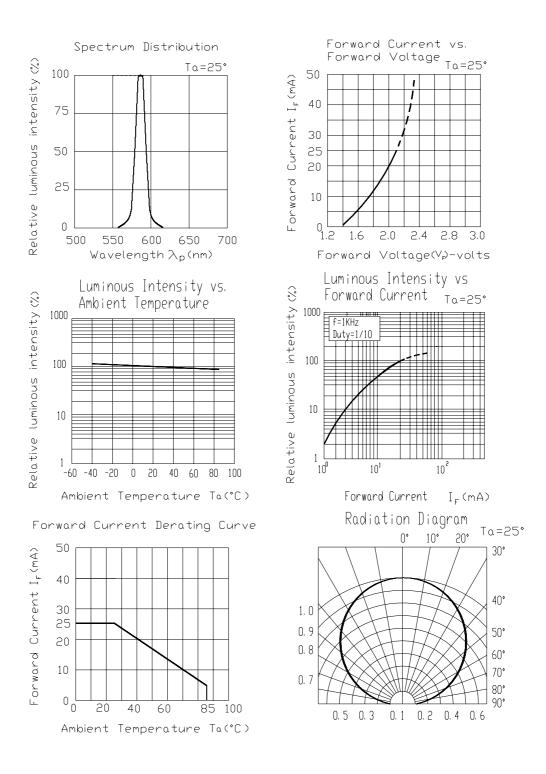

Everlight Electronics Co., Ltd. Device No. : DSE-193-Y11 http://www.everlight.com Prepared date: 06-Jan-2005 Rev.1 Page: 5 of 10 Prepared by: Jessica Chang

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


19-213/Y2C-CQ1R1L/3T

Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



Reel Dimensions

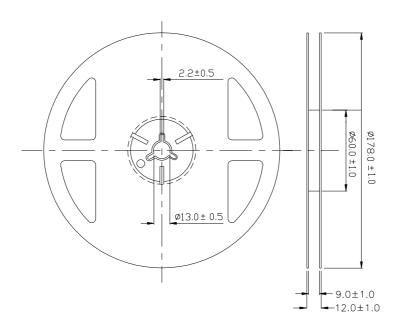


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-193-Y11 http://www.everlight.com Prepared date: 06-Jan-2005 Rev.1 Page: 6 of 10 Prepared by: Jessica Chang


Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

Progressive direction

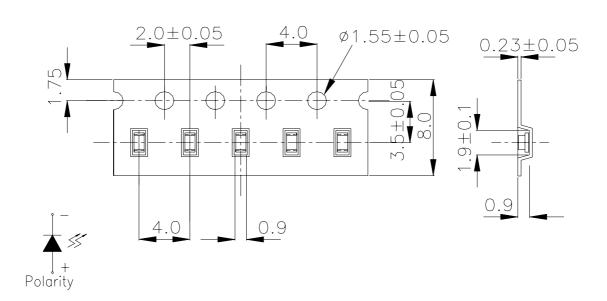

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

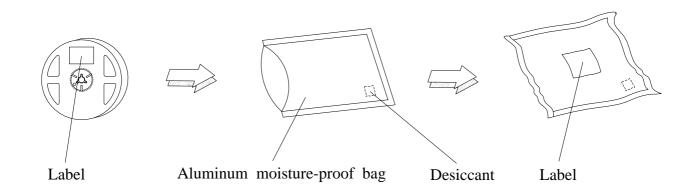

Everlight Electronics Co., Ltd. Device No. : DSE-193-Y11 http://www.everlight.com Prepared date: 06-Jan-2005 Rev.1 Page: 7 of 10 Prepared by: Jessica Chang

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90% LTPD : 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min $\int 5 \text{ min}$ L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
б	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30° C or less and 90% RH or less.
 - 2.3 The LEDs should be used within a year.
 - 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
 - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
 - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

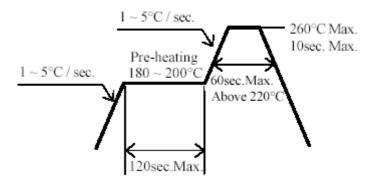


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

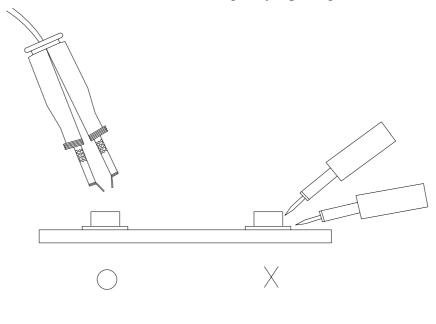

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : DSE-193-Y11 http://www.everlight.com Prepared date: 06-Jan-2005 Rev.1 Page: 10 of 10 Prepared by: Jessica Chang