

Technical Data Sheet

Mini Top LEDs (Reverse Gull Wing) (Preliminary)

65-21/GVC-AK2M1Z/3AA

Features

- White SMT package.
- Optical indicator.
- Wide viewing angle.
- Soldering methods: IR reflow soldering.
- Available on tape and reel.
- Pb-free
- The product itself will remain within RoHS compliant version.



Prepared by: Ray Yuan

Descriptions

• The 65-21 series is available in soft orange, green, blue, and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. Besides, LED is mounted top down and emits through the PCB. This feature makes the SMT TOP LED ideal for light pipe application.

Applications

Device No.:

- Optical indicators.
- Coupling into light guides.
- Backlighting (LCD, cellular phones, switches, keys, displays, illuminated advertising, general lighting).
- Coupling into light guides; Interior automotive lighting (e.g. dashboard backlighting, etc.).

Device Selection Guide


Chip		D : G !	
Material	Emitted Color	Resin Color	
AlGaInP	Green	Water Clear	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 1 of 10

Prepared date: 30-Apr-2007

65-21/GVC-AK2M1Z/3AA

Package Outline Dimensions

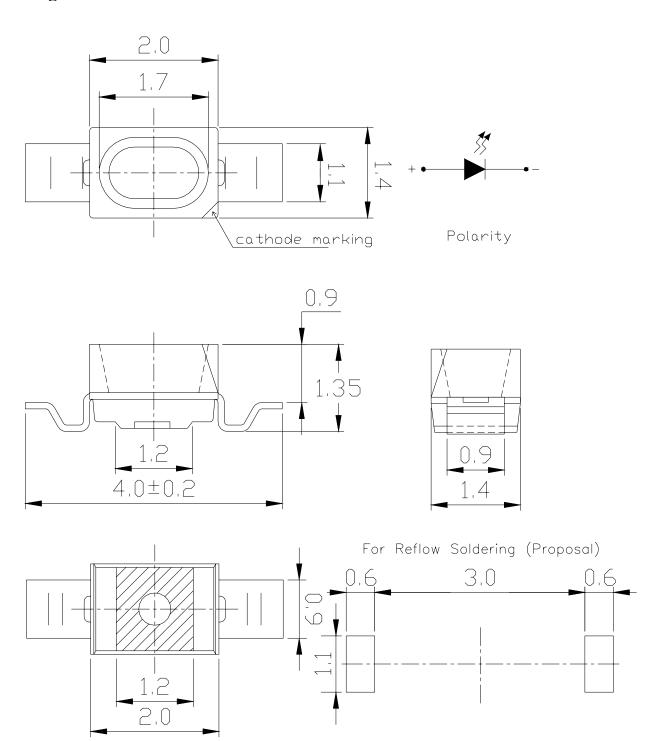

Notes: All dimensions are in millimeters.

Tolerances unspecified are ± 0.1 mm.

Everlight Electronics Co., Ltd.

Device No.:

http://www.everlight.com

Prepared date: 30-Apr-2007

Rev. 3 Page: 2 of 10

Prepared by: Ray Yuan



65-21/GVC-AK2M1Z/3AA

Absolute Maximum Ratings (Ta=25°C)

11050tute Waximum Ratings (14-25 0)							
Parameter	Symbol	Rating	Unit				
Reverse Voltage	V_R	5	V				
Forward Current	I_F	25	mA				
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA				
Power Dissipation	Pd	60	mW				
Electrostatic Discharge(HBM)	ESD	2000	V				
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$				
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$				
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.					

Electro-Optical Characteristics (Ta=25°C)

•						
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	9.0		22.5	mcd	I _F =10mA
Viewing Angle	2 \theta 1/2		120		deg	I _F =10mA
Peak Wavelength	λр		568		nm	I _F =10mA
Dominant Wavelength	λd	563.5		571.5	nm	I _F =10mA
Spectrum Radiation Bandwidth	Δλ		20		nm	I _F =10mA
Forward Voltage	VF		2.0	2.4	V	I _F =10mA
Reverse Current	Ir			10	μ A	$V_R=5V$

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

Rev. 3 Everlight Electronics Co., Ltd. http://www.everlight.com Page: 3 of 10

Device No.: Prepared date: 30-Apr-2007 Prepared by: Ray Yuan



65-21/GVC-AK2M1Z/3AA

Bin Range of Dominant Wavelength

Group	Bin Code	Min	Max	Unit	Condition
A	C13	563.5	565.5		mcd I _F =10mA
	C14	565.5	567.5	- mcd	
	C15	567.5	569.5		
	C16	569.5	571.5		

Bin Range of Luminous Intensity

bili Runge of Lummous Intensity						
Bin Code	Min	Max	Unit	Condition		
K2	9.0	11.5	- mcd	I _F =10mA		
L1	11.5	14.5				
L2	14.5	18.0				
M1	18.0	22.5				

Notes:

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 3

Page: 4 of 10


Device No.:

Prepared date: 30-Apr-2007

Prepared by: Ray Yuan

65-21/GVC-AK2M1Z/3AA

Typical Electro-Optical Characteristics Curves

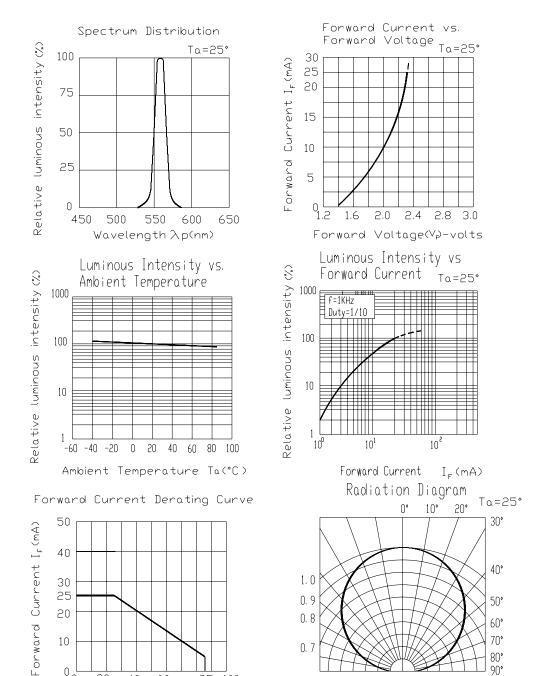

10

40

60

Ambient Temperature Ta(°C)

100

0.7

0. 2

0. 1

0.3

70°

Prepared date: 30-Apr-2007

Prepared by: Ray Yuan

0.4 0.6



65-21/GVC-AK2M1Z/3AA

Packing specification


Label explanation

(1) CPN: Customer's Production Number


(2) P/N: Production Number(3) QTY: Packing Quantity

(4) CAT: Luminous Intensity Rank(5) HUE: Dom. Wavelength Rank(6) REF: Forward Voltage Rank

(7) LOT No: Lot Number

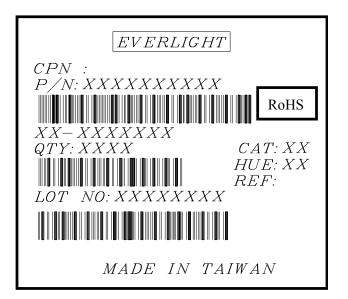

Reel Dimensions

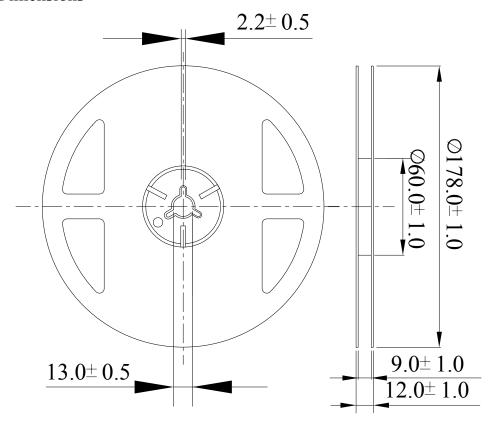


Note: Tolerances unless dimension ± 0.1 mm. Unit = mm

Rev. 3


65-21/GVC-AK2M1Z/3AA

Carrier Tape Dimensions; Loaded quantity per reel 3000 PCS/reel

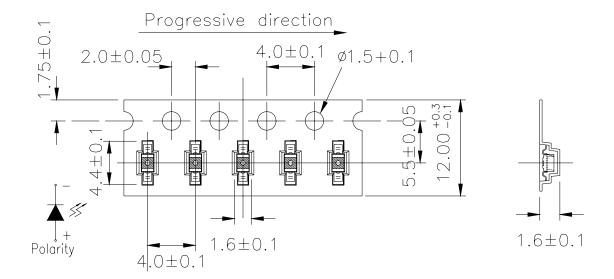

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

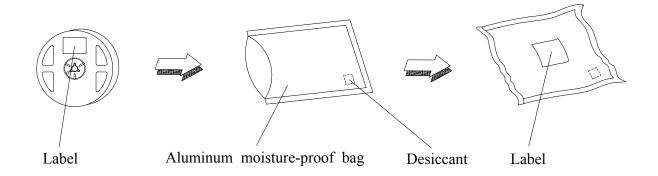

http://www.everlight.com

Everlight Electronics Co., Ltd.

Device No.: Prepared date: 30-Apr-2007

Rev. 3

Page: 7 of 10

Prepared by: Ray Yuan



65-21/GVC-AK2M1Z/3AA

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260° C $\pm 5^{\circ}$ C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H:+100°C 15min ∫ 5 min L:-40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd.

http://www.everlight.com

Page: 8 of 10

Device No.:

Prepared date: 30-Apr-2007

Prepared by: Ray Yuan

Rev. 3



65-21/GVC-AK2M1Z/3AA

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30℃ or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: $60\pm5^{\circ}$ C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

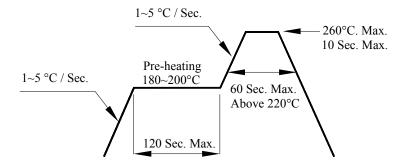

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 9 of 10


Device No.: Prepared date: 30-Apr-2007 Prepared by: Ray Yuan



65-21/GVC-AK2M1Z/3AA

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

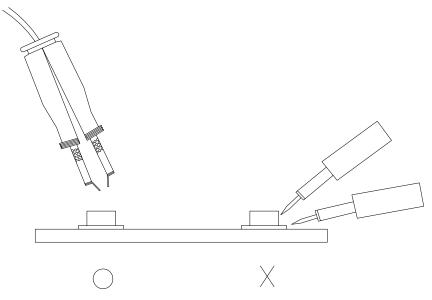

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 10 of 10 Device No.: Prepared date: 30-Apr-2007 Prepared by: Ray Yuan