



#### **UN3E8 Series**

#### **Description**

Gas discharge Tubes (GDT) are classical components for protecting the installations of the telecommunications. It is essential that IT and telecommunications systems -with their high-grade but sensitive electronic circuits - be protected by arresters. They are thus fitted at the input of the power supply system together with varistors and at the connection points to telecommunication lines. They have become equally indispensable for protecting base stations in mobile telephone systems as well as extensive cable television (CATV) networks with their repeaters and distribution systems.

These protective components are also indispensable in other sectors, In AC power transmission systems, they are often used with current-limiting varistors, In customer premises equipment such as DSL modems, WLAN routers, TV sets and cable modems In air-conditioning equipment, the integral black-box concept offers graduated protection by combining arresters with varistors, PTC, diodes and inductor.

#### **Features**

- Non-Radioactive
- u RoHS compliant
- u Low insertion loss
- u Excellent response to fast rising transients
- Ultra low capacitance
- 20KA surge capability tested with 8/20μs pulse as defined by IEC 61000-4-5
- Available with thermal failsafe option (add 'F' suffix to part number)

### **Applications**

- u Communication equipment
- **u** CATV equipment
- u Test equipment
- u Data lines
- u Power supplies
- u Telecom SLIC protection
- Broadband equipment
- ADSL equipment, including ADSL2+
- u XDSL equipment
- u Satellite and CATV equipment
- Consumer electronics

## UN3E8-XXXHM



#### **UN3E8-XXXHMF**



**UN3E8-XXXHP** 



#### **UN3E8-XXXH**



#### **Schematic Symbol**



a = Tipb = Ringe = Ground(center electrode)

#### **Agency Approvals**

AGENCY	AGENCY FILE NUMBER
<b>71</b> °	E341061

#### **Product Characteristics**

Materials	Nickel-plated with Tinplated wires					
Product Marking	UNION XXXH XXX -Nominal voltage H -20KA					
Glow to Arc Transition Current	~1 Amps					
Glow Voltage	~70 Volts					
Storage and Operational Temperature	-40 to +90°C					
	UN3E8-XXXHM	~2.0g				
Weight	UN3E8-XXXHMF	~2.3g				
weight	UN3E8-XXXHP	~2.1g				
	UN3E8-XXXH	~1.8g				
Climatic category (IEC 60068-1)	40/ 90/ 21					

Please refer to www.socay.com for current information.







## **UN3E8 Series**

#### **Dimensions** (Unit: mm)


#### Radial Leaded Devices (UN3E8-XXXHM)




#### Radial Leaded Devices with Fail-Safe (UN3E8-XXXHMF)



#### "T" Leaded Devices (UN3E8-XXXHP)



#### Without wire Devices (UN3E8-XXXH)



#### **Electrical Characteristics**

								Service Life			
Part Number Marki	Marking	DC Spark-over Voltage arking		Maximum Impulse Spark-over Voltage		Maximum Capacitance	Arc Voltage	Nominal Impulse Discharge Current	Max Impulse Discharge Current	Nominal Alternating Discharge Current	Impulse Life
		@100V/S	@100V/μs	@1KV/μs		@1MHz	@1A	@8/20µs <sup>4)</sup> ±5 times	@8/20µs <sup>4)</sup> 1 time	@50Hz <sup>4)</sup> 1 Sec 10 times	@10/1000µs <sup>4)</sup> 300 times
UN3E8-75HM UN3E8-75HMF UN3E8-75HP UN3E8-75H	UNION 75H	75V±20%	<500V	<600V	1 GΩ (at 25V)	<1.5pF	~15V	20KA	25KA	20A	200A
UN3E8-90HM UN3E8-90HMF UN3E8-90HP UN3E8-90H	UNION 90H	90V±20%	<500V	<600V	1 GΩ (at 50V)	<1.5pF	~15V	20KA	25KA	20A	200A

Please refer to www.socay.com for current information.





## **UN3E8 Series**

### **Electrical Characteristics (Continue)**

							Service Life			
Marking	DC Spark-over Voltage			Minimum Insulation Resistance	Maximum Capacitance	Arc Voltage	Nominal Impulse Discharge Current	Max Impulse Discharge Current	Nominal Alternating Discharge Current	Impulse Life
	@100V/S	@100V/μs	@1KV/μs		@1MHz	@1A	@8/20µs <sup>4)</sup> ±5 times	@8/20µs <sup>4)</sup> 1 time	@50Hz <sup>4)</sup> 1 Sec 10 times	@10/1000μs <sup>4)</sup> 300 times
UNION 150H	150V±20%	<500V	<600V	1 GΩ (at 50V)	<1.5pF	~25V	20KA	25KA	20A	200A
UNION 230H	230V±20%	<600V	<700V	1 GΩ (at 100V)	<1.5pF	~25V	20KA	25KA	20A	200A
UNION 250H	250V±20%	<600V	<700V	1 GΩ (at 100V)	<1.5pF	~25V	20KA	25KA	20A	200A
UNION 300H	300V±20%	<800V	<900V	1 GΩ (at 100V)	<1.5pF	~25V	20KA	25KA	20A	200A
UNION 350H	350V±20%	<800V	<900V	1 GΩ (at 100V)	<1.5pF	~25V	20KA	25KA	20A	200A
UNION 420H	420V±20%	<900V	<1000V	1 GΩ (at 100V)	<1.5pF	~25V	20KA	25KA	20A	200A
UNION 470H	470V±20%	<900V	<1000V	1 GΩ (at 100V)	<1.5pF	~25V	20KA	25KA	20A	200A
UNION 600H	600V±20%	<1100V	<1200V	1 GΩ (at 100V)	<1.5pF	~25V	20KA	25KA	20A	200A
UNION 800H	800V±20%	<1200V	<1400V	1 GΩ (at 100V)	<1.5pF	~25V	20KA	25KA	20A	200A
	UNION 150H  UNION 230H  UNION 250H  UNION 300H  UNION 470H  UNION 470H  UNION 600H  UNION	Marking         Voltage           UNION 150H         150V±20%           UNION 230H         230V±20%           UNION 250H         250V±20%           UNION 300H         300V±20%           UNION 350H         420V±20%           UNION 420H         470V±20%           UNION 470H         600V±20%           UNION 600H         800V±20%	Marking         Voltage         Spark-over the part of the pa	Marking         Voltage         Spark-over Voltage           UNION 150H         2100V/S         2100V/µs         21KV/µs           UNION 150H         150V±20%         <500V	Marking         Voltage         Spark-over Voltage         Minimum Insulation Resistance           UNION 150H         150V±20%         <500V	Marking         Voltage         Spark-over Voltage Insulation Resistance         Minimum Insulation Resistance         Capacitance Insulation Resistance           UNION 150H         150V±20%         <500V	Marking         Voltage         Spark-over Voltage         Minimum Insulation Resistance         Capacitance         Voltage           UNION 150H         2100V/Js         @16VV/Js         @16VV/Js         @11MHz         @1A           UNION 150H         150V±20%         <500V	Marking   Voltage   Spark-over Voltage   Minimum Insulation   Capacitance   Voltage   Impulse Discharge   Current   Capacitance   Voltage   Impulse Discharge   Voltage   Impulse Discharge   Capacitance   Voltage   Impulse Discharge   Capacitance   Voltage   Impulse Discharge   Capacitance   Voltage   Impulse Discharge   Impulse   Impulse Discharge   Impulse Discharge   Impulse   Imp	DC Spark-over Voltage   Maximum Impulse   Spark-over Voltage   Spark-over Voltage   Minimum Insulation   Maximum   Maximum	DC Spark-over Voltage   Spa

3/5

#### Notes:

- 1). Terms in accordance with ITU-T K.12 and GB/T 9043-2008
- 2). At delivery AQL 0.65 level  $\,\,\mathrm{II}$  , DIN ISO 2859
- 3). Tip or ring electrode to center electrode
- 4). Total current through center electrode, half value through tip respectively ring electrode







## **UN3E8 Series**

#### **Electrical Rating**

Item	Test Condition / Description	Requirement
DC Spark-over Voltage Impulse Spark-over Voltage	The voltage is measured with a slowly rate of rise dv / dt=100V/s  The maximum impulse spark-over voltage is measured with a rise time of dv / dt=100V//µs or 1KV/µs	
Insulation Resistance	The resistance of gas tube shall be measured each terminal each other terminal, please see above spec.	
Capacitance	The capacitance of gas tube shall be measured each terminal to each other terminal.  Test frequency:1MHz	
Nominal Impulse Discharge Current	The maximum current applying a waveform of 8/20µs that can be applied across the terminals of the gas tube. One hour after the test is completed, re-testing of the DC spark-over voltage does not exceed ±30% of the nominal DC spark-over voltage. Dwell time between pulses is 3 minutes.  1.0 0.9 0.5 0.1 0.0 Rated RMS value of AC current at 50Hz, 1 sec. 10 times, Intervals: 3min. The DC	To meet the specified value
Nominal Alternating Discharge Current	Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. The DC spark-over voltage does not exceed $\pm 30\%$ of the nominal DC spark-over voltage. IR > $10^8$ ohms.	

#### **Recommended soldering profile**

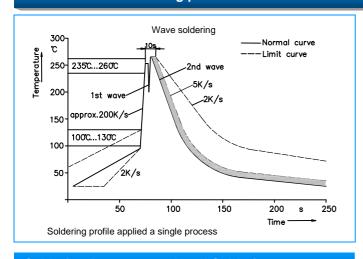

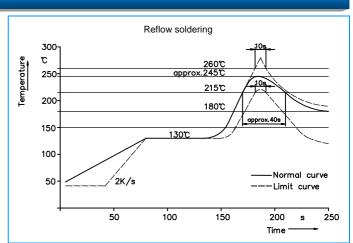

#### **Soldering Parameters - Hand Soldering**

Solder Iron Temperature: 350°C +/-5°C Heating Time: 5 seconds max.


SOCAY Electronics Co., Ltd.






#### **UN3E8 Series**


#### **Part Numbering**

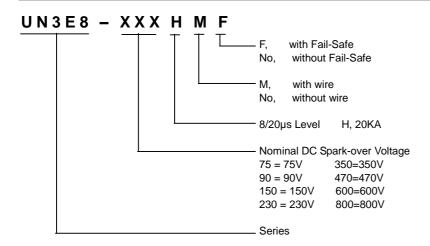

#### **Packaging**

Part Number	Description	Quantity
UN3E8-XXXHM	100PCS per Tray, 10 Trays / Inner Carton	1000
UN3E8-XXXHMF	100PCS per Tray, 10 Trays / Inner Carton	1000
UN3E8-XXXHP	50PCS per Tray, 10 Trays / Inner Carton	500
UN3E8-XXXH	100PCS per Tray, 10 Trays / Inner Carton	1000

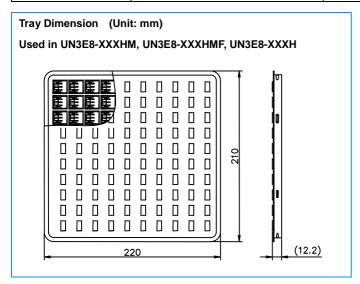

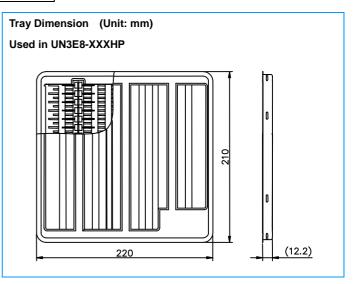

### **Cautions and warnings**

- **u** Gas discharge tubes (GDT) must not be operated directly in power supply networks.
- **u** Gas discharge tubes (GDT) may become hot in case of longer periods of current stress (danger of burning).
- Gas discharge tubes (GDT) may be used only within their specified values. In the event of overload, the head contacts may fail or the component may be destroyed.
- Damaged Gas discharge tubes (GDT) must not be re-used.

Please refer to www.socay.com for current information.