



DIP8-pin type with reinforced insulation

PhotoMOS®

**GE 2 Form A
(AQW210EH)**

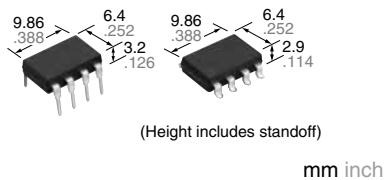

RoHS compliant

FEATURES

1. Reinforced insulation of 5,000 V

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

2. Applicable for 2 Form A use as well as two independent 1 Form A use

3. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

4. High sensitivity and high speed response

Can control max. 0.14 A load current with 5 mA input current. Fast operation speed of Typ. 0.5 ms (AQW210EH).

5. Low-level off state leakage current of max. 1 µA

TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Electricity, plant equipment
- Security equipment
- Sensing equipment

TYPES

I/O isolation voltage	Output rating*	Package	Part No.			Packing quantity	
			Through hole terminal		Surface-mount terminal		
			Load voltage	Load current	Tube packing style	Tape and reel packing style	Tube
AC/DC dual use	Reinforced 5,000 Vrms	DIP8-pin	60 V	500 mA	AQW212EH	AQW212EHA	AQW212EHAX
			350 V	120 mA	AQW210EH	AQW210EHA	AQW210EHAX
			400 V	100 mA	AQW214EH	AQW214EHA	AQW214EHAX
			600 V	40 mA	AQW216EH	AQW216EHA	AQW216EHAX
*Indicate the peak AC and DC values.		Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.					

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW212EH(A)	AQW210EH(A)	AQW214EH(A)	AQW216EH(A)	Remarks
Input	LED forward current	I _F		50mA			
	LED reverse voltage	V _R		5V			
	Peak forward current	I _{FP}		1A			f =100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		75mW			
Output	Load voltage (peak AC)	V _L	60 V	350 V	400 V	600 V	
	Continuous load current	I _L	0.5 A (0.6 A)	0.12 A (0.14 A)	0.1 A (0.13 A)	0.04 A (0.05 A)	Peak AC, DC (): in case of using only 1 channel
	Peak load current	I _{peak}	1.5 A	0.36 A	0.3 A	0.12 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}		800mW			
Total power dissipation		P _T		850mW			
I/O isolation voltage		V _{iso}		5,000 Vrms			
Ambient temperature	Operating	T _{opr}		-40 to +85°C -40 to +185°F			(Non-icing at low temperatures)
	Storage	T _{stg}		-40 to +100°C -40 to +212°F			

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW212EH(A)	AQW210EH(A)	AQW214EH(A)	AQW216EH(A)	Condition
Input	LED operate current	Typical	I_{Fon}	1.2mA			$I_L=Max.$
		Maximum		3.0mA			
Input	LED turn off current	Minimum	I_{Foff}	0.4mA			$I_L=Max.$
		Typical		1.1mA			
Input	LED dropout voltage	Typical	V_F	1.25 V (1.14 V at $I_F=5mA$)			$I_F=50mA$
		Maximum		1.5V			
Output	On resistance	Typical	R_{on}	0.83Ω	18Ω	26Ω	52Ω
		Maximum		2.5Ω	25Ω	35Ω	120Ω
Output	Off state leakage current	Maximum	I_{Leak}	1μA			
							$I_F=0mA$ $V_L=Max.$
Transfer characteristics	Turn on time*	Typical	T_{on}	1ms	0.5ms		$I_F=5mA$ $I_L=Max.$
		Maximum		4ms	2.0ms		
	Turn off time*	Typical	T_{off}	0.08ms		0.04ms	$I_F=5mA$ $I_L=Max.$
		Maximum		1.0ms			
Transfer characteristics	I/O capacitance	Typical	C_{iso}	0.8pF			$f = 1MHz$ $V_B = 0V$
		Maximum		1.5pF			
Transfer characteristics	Initial I/O isolation resistance	Minimum	R_{iso}	1,000MΩ			500V DC

*Turn on/Turn off time

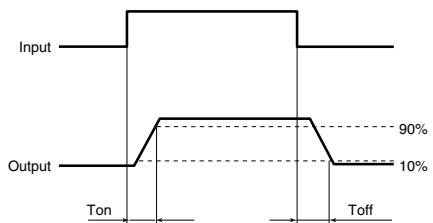

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.


Item	Symbol	Number of used channels	Min.	Max.	Unit
AQW212EH(A)	LED current	I_F	5	30	mA
	Load voltage (Peak AC)	V_L	—	48	V
	Continuous load current	I_L	1ch 2ch	0.6 0.5	A
AQW210EH(A)	Load voltage (Peak AC)	V_L	—	280	V
	Continuous load current	I_L	1ch 2ch	0.14 0.12	A
	Load voltage (Peak AC)	V_L	—	320	V
AQW214EH(A)	Continuous load current	I_L	1ch 2ch	0.13 0.1	A
	Load voltage (Peak AC)	V_L	—	480	V
AQW216EH(A)	Continuous load current	I_L	1ch 2ch	0.05 0.04	A

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1-(1). Load current vs. ambient temperature characteristics
Allowable ambient temperature: -40 to +85°C
-40 to +185°F

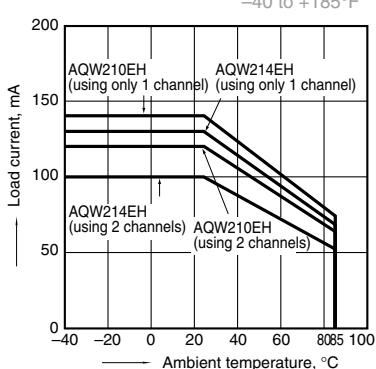


1-(2). Load current vs. ambient temperature characteristics
Allowable ambient temperature: -40 to +85°C
-40 to +185°F

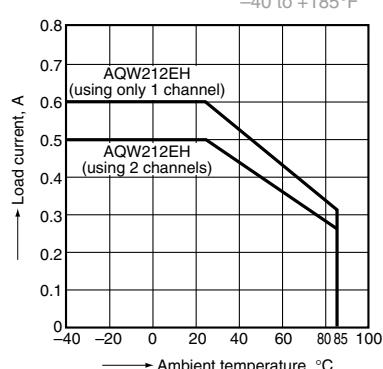


1-(3). Load current vs. ambient temperature characteristics
Allowable ambient temperature: -40 to +85°C
-40 to +185°F

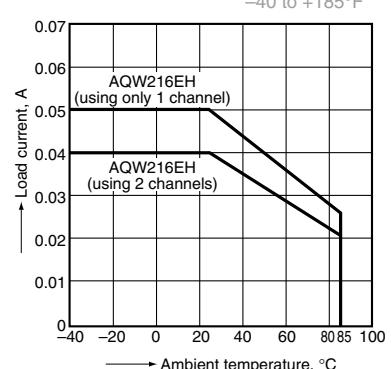


2-(1). On resistance vs. ambient temperature characteristics
Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

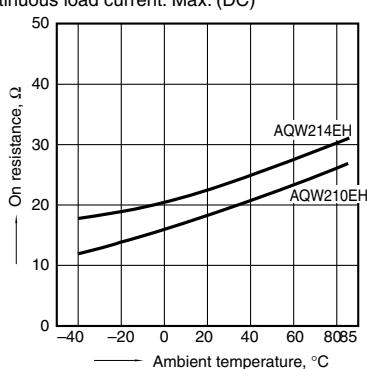


2-(2). On resistance vs. ambient temperature characteristics
Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

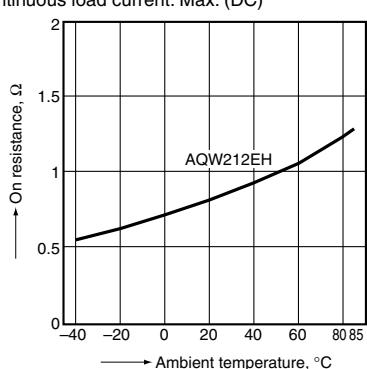


2-(3). On resistance vs. ambient temperature characteristics
Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

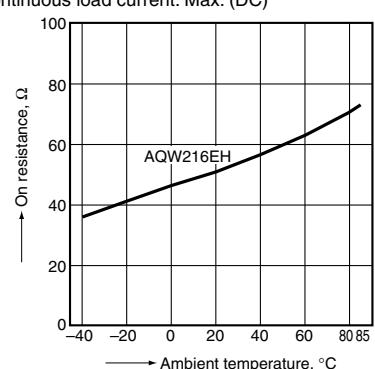


3. Turn on time vs. ambient temperature characteristics
Sample: All types
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

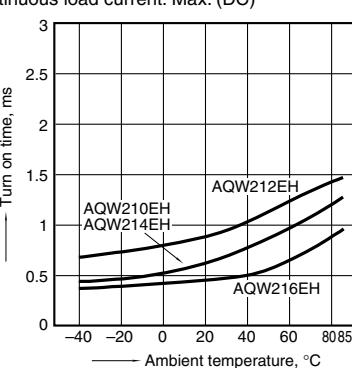


4. Turn off time vs. ambient temperature characteristics
Sample: All types
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

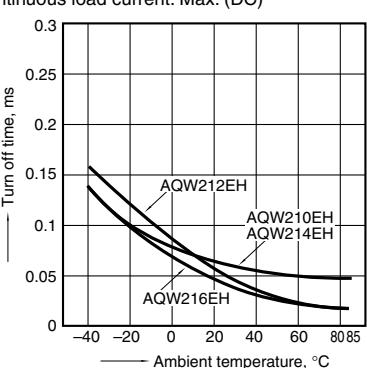


5. LED operate current vs. ambient temperature characteristics
Sample: All types; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

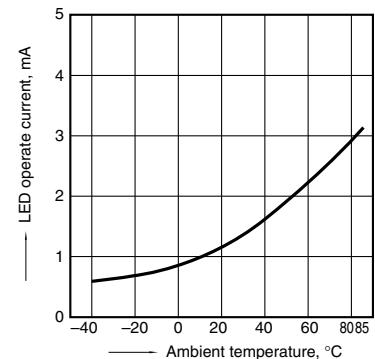


6. LED turn off current vs. ambient temperature characteristics
Sample: All types; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

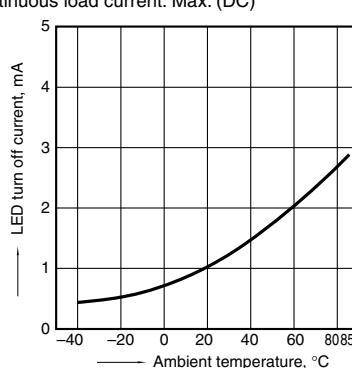

7. LED dropout voltage vs. ambient temperature characteristics
Sample: All types; LED current: 5 to 50 mA

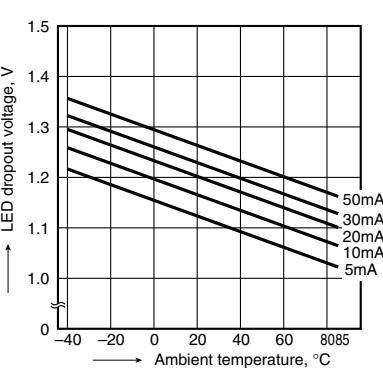


8-(1). Current vs. voltage characteristics of output at MOS portion
Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

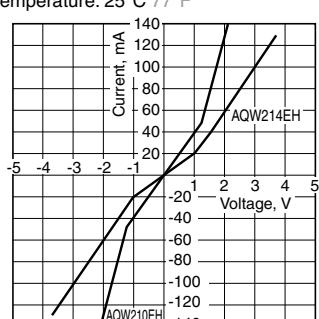

GE 2 Form A (AQW21OEH)


8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

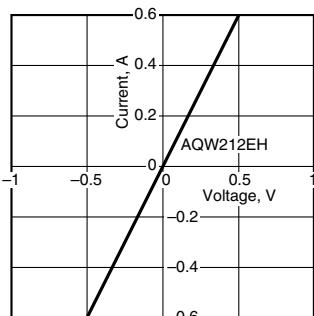


8-(3). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

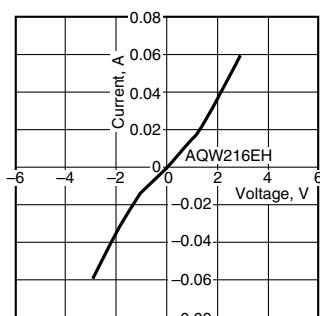


9-(1). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

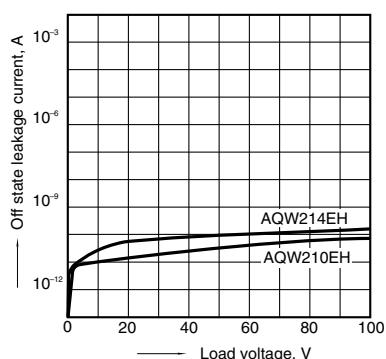

9-(2). Off state leakage current vs. load voltage characteristics


Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

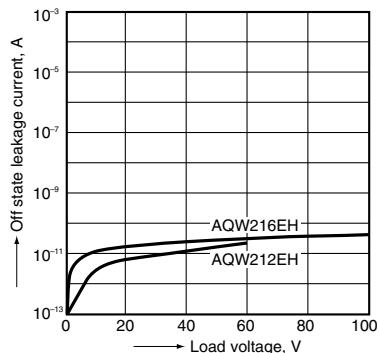

10. Turn on time vs. LED forward current characteristics

Sample: All types


Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

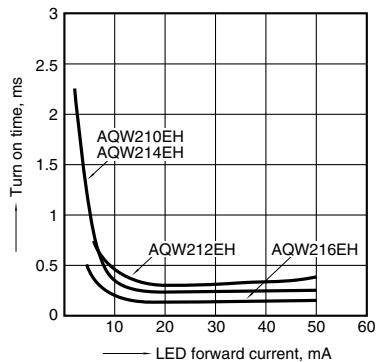

11. Turn off time vs. LED forward current characteristics


Sample: All types

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

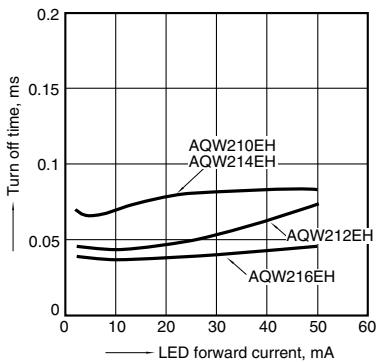


12-(1). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

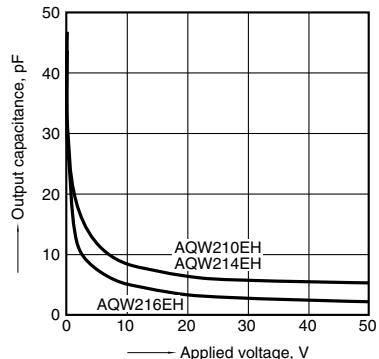

12-(2). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

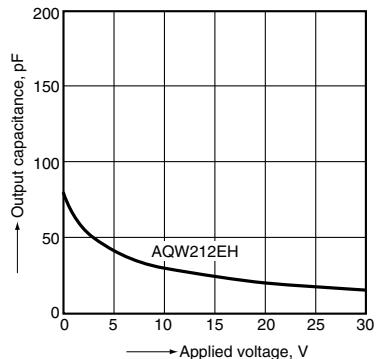

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017