

Features

- ESD Protect for 1 Line with Bi-directional
- Provide ESD protection for the protected line to IEC 61000-4-2 (ESD) ±20kV (air), ±20kV (contact)
 IEC 61000-4-4 (EFT) 50A (5/50ns)
 IEC 61000-4-5 (Lightning) 3A (8/20µs)
 Cable Discharge Event (CDE)
- 0201 small DFN package saves board space
- Protect one I/O line or one power line
- Fast turn-on and Low clamping voltage
- For operating voltage of 12V and below
- Solid-state silicon-avalanche and active circuit triggering technology
- Green Part

Applications


- Mobile Phones
- Hand Held Portable Applications
- Computer Interfaces Protection
- Microprocessors Protection
- Serial and Parallel Ports Protection
- Control Signal Lines Protection
- Power lines on PCB Protection
- Latchup Protection

Description

AZ4A12-01F is a design which includes one Bi-directional ESD rated clamping cell to protect one power line, or one control line, or one low speed data line in an electronic systems. The AZ4A12-01F has been specifically designed to protect sensitive components which are connected to power and control lines from over-voltage damage and latch-up caused by Electrostatic Discharging (ESD), Electrical Fast Transients (EFT), and Cable Discharge Event (CDE). AZ4A12-01F is a unique design which includes proprietary clamping cell in a single package. During transient conditions, the proprietary clamping cell prevents over-voltage on the power line or control/data lines, protecting any downstream components.

AZ4A12-01F may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 (\pm 15kV air, \pm 8kV contact discharge)

Circuit Diagram / Pin Configuration

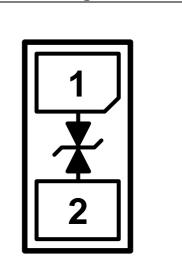

DFN0603P2Y (Bottom View) (0.6mm x 0.3mm x 0.3mm)



SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	RATING	UNITS	
Peak Pulse Current (tp=8/20µs)	I _{PP}	3	А	
Operating Supply Voltage	V _{DC}	±13.2	V	
ESD per IEC 61000-4-2 (Air)	N/	±20	kV	
ESD per IEC 61000-4-2 (Contact)	V_{ESD}	±20		
Lead Soldering Temperature	T _{SOL}	260 (10 sec.)	°C	
Operating Temperature	T _{OP}	-55 to +85	٥C	
Storage Temperature	T _{STO}	-55 to +150	٥C	


ELECTRICAL CHARACTERISTICS						
PARAMETER	SYMBOL	CONDITIONS	MINI	TYP	MAX	UNITS
Stand-Off	V _{RWM}	T=25 °C.			12	V
Voltage	▼ RWM					
Leakage	I	$1/1 = \pm 121/1 = -25$ °C			0.1	
Current	Leak	V _{RWM} = ±12V, T=25 °C.			0.1	μA
Breakdown	V	1 1mA T 25 %	13.5		16	V
Voltage	V _{BV}	I _{BV} = 1mA, T=25 °C.	13.5			
ESD Clamping		IEC 61000-4-2 +8kV (I _{TLP} = 16A),				
Voltage (Note 1)	$V_{ESD_{CL}}$	T=25 °C, Contact mode.		18		V
ESD Dynamic Turn-on	D	IEC 61000-4-2, 0~+8kV, T=25 °C, Contact mode.		0.3		Ω
	R _{dynamic}					
Resistance						
Channel Input	C _{IN}	V _R = 0V, f = 1MHz, T=25 °C.		3.5	5	рF
Capacitance				0.0		יץ

Note 1: ESD Clamping Voltage was measured by Transmission Line Pulsing (TLP) System.

TLP conditions: $Z_0=50\Omega$, $t_p=100$ ns, $t_r=1$ ns.



Typical Characteristics

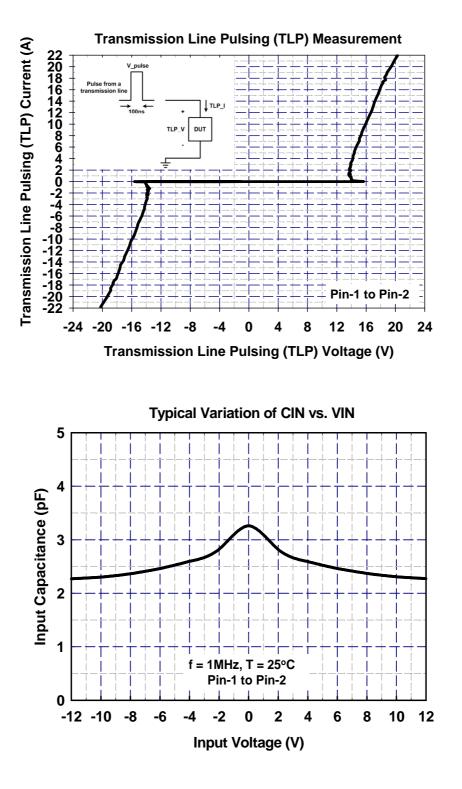



Applications Information

The AZ4A12-01F is designed to protect one line against System ESD/EFT/Cable-Discharge pulses by clamping it to an acceptable reference. It provides bi-directional protection.

The usage of the AZ4A12-01F is shown in Fig. 1. Protected line, such as data line, control line, or power line, is connected at pin 1. The pin 2 is connected to a ground plane on the board. In order to minimize parasitic inductance in the board traces, all path lengths connected to the pins of AZ4A12-01F should be kept as short as possible. In order to obtain enough suppression of ESD induced transient, good circuit board is critical. Thus, the following guidelines are recommended:

- Minimize the path length between the protected lines and the AZ4A12-01F.
- Place the AZ4A12-01F near the input terminals or connectors to restrict transient coupling.
- The ESD current return path to ground should be kept as short as possible.
- Use ground planes whenever possible.
- NEVER route critical signals near board edges and near the lines which the ESD transient easily injects to.


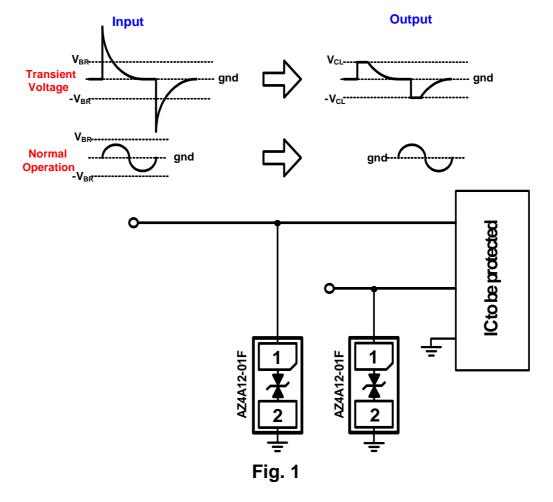





Fig. 2 shows another simplified example of using AZ4A12-01F to protect the control line, low

speed data line, and power line from ESD transient stress.




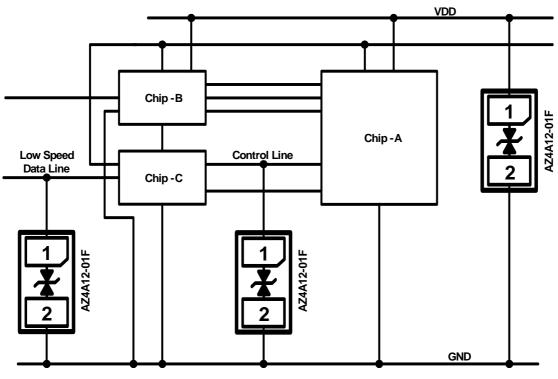



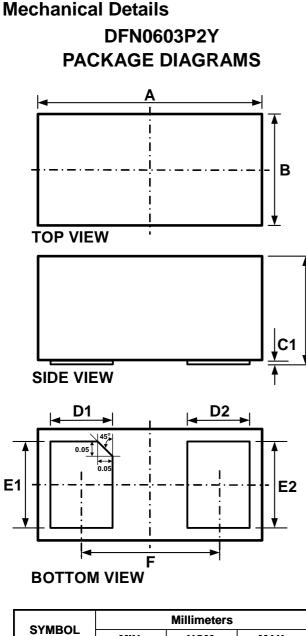

SYMBOL	Millimeters				
	MIN.	NOM.	MAX.		
A	0.55	0.60	0.65		
В	0.25	0.30	0.35		
С	0.28	0.30	0.32		
C1	0.00	0.02	0.05		
D1	0.13	0.18	0.23		
D2	0.14	0.19	0.24		
E1/E2	0.20	0.25	0.30		
F		0.35			

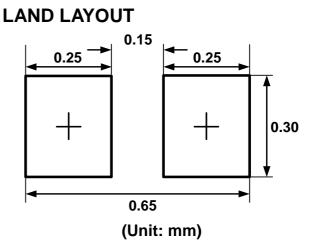


Notes:

С

This LAND LAYOUT is for reference purposes only. Please consult your manufacturing partners to ensure your company's PCB design guidelines are met.

MARKING CODE

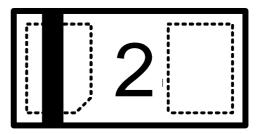

Part Number	Marking Code		
AZ4A12-01F	2		
(Green Part)	Z		

Note : Green means Pb-free, RoHS, and Halogen free compliant.

Revision 2016/02/25 © 2016 Amazing Micro.



Ordering Information

PN#	Material	Туре	Reel size	MOQ	MOQ/internal box	MOQ/carton
AZ4A12-01F.R7G	Green	T/R	7 inch	12,000/reel	4 reel= 48,000/box	6 box =288,000/carton

Revision History

Revision	Modification Description
Revision 2015/05/06	Preliminary Release.
Revision 2016/02/25	Formal Release.