EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

0805 Package Chip LED (0.8mm Height)

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow

solder process.

- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version

Descriptions

- The 17-215 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

Device Selection Guide

		I CI	
Part No.	Material	Emitted Color	Lens Color
17-215/S2C-AN2Q1B/3T	AlGaInP	Brilliant Orange	Water Clear




<u>17-215/S2C – AN2Q1B/3T</u>



Package Outline Dimensions

17-215/S2C-AN2Q1B/3T

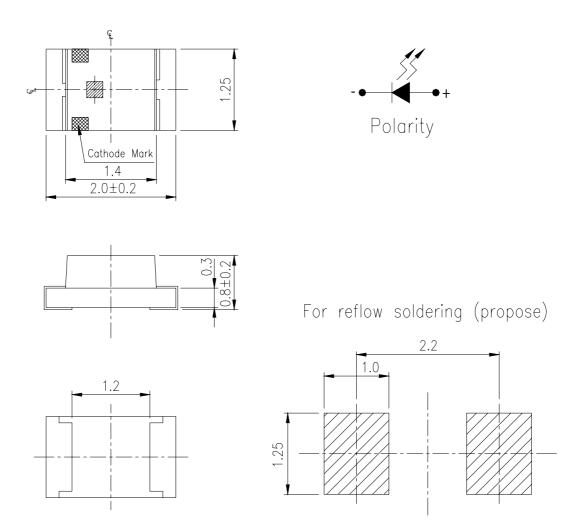

Note: The tolerances unless mentioned are ± 0.1 mm ,Unit = mm

http://www.everlight.com Prepared date: 16-Oct-2006 EVERLIGHT ELECTRONICS CO.,LTD.

17-215/S2C-AN2Q1B/3T

Absolute Maximum Ratings (Ta=25°C)

ÆRLIGHT

Absolute Maximum Ratings (1a-25 C)					
Parameter	Symbol	Rating	Unit		
Reverse Voltage	V _R	5	V		
Forward Current	$I_{\rm F}$	25	mA		
Peak Forward Current (Duty 1/10 @1KHz)	$I_{\rm FP}$	60	mA		
Power Dissipation	Pd	60	mW		
Electrostatic Discharge(HBM)	ESD	2000	V		
Operating Temperature	Topr	-40 ~ +85	°C		
Storage Temperature	Tstg	-40 ~ +90	°C		
Soldering Temperature	Tsol	Reflow Soldering : 260° C for 10sec. Hand Soldering : 350° C for 3 sec			

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	36.0		90.0	mcd	
Viewing Angle	2 0 1/2		130		deg	
Peak Wavelength	λp		611		nm	
Dominant Wavelength	λd	600.5		612.5	nm	I _F =20mA
Spectrum Radiation Bandwidth	$ riangle \lambda$		17		nm	
Forward Voltage	\mathbf{V}_{F}	1.75		2.35	V	
Reverse Current	Ir			10	$\mu \mathbf{A}$	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength $\pm 1nm$

3.Tolerance of Forward Voltage ±0.1V

EVERLIGHT ELECTRONICS CO.,LTD.

17-215/S2C-AN2Q1B/3T

Bin Range Of Luminous Intensity

EVERLIGHT

Bin	Min	Max	Unit	Condition	
N2	36.0	45.0	mcd		
P1	45.0	57.0		I _F =20mA	
P2	57.0	72.0			
Q1	72.0	90.0			

Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition	
A	D8	600.5	603.5			
	D9	603.5	606.5		I _F =20mA	
	D10	606.5	609.5	nm		
	D11	609.5	612.5			

Bin Range Of Luminous Voltage

Group	Bin	Min	Max	Unit	Condition	
В	0	1.75	1.95			
	1	1.95	2.15	V	$I_F = 20 mA$	
	2	2.15	2.35		l	

Notes:


1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

17-215/S2C-AN2Q1B/3T

Typical Electro-Optical Characteristics Curves

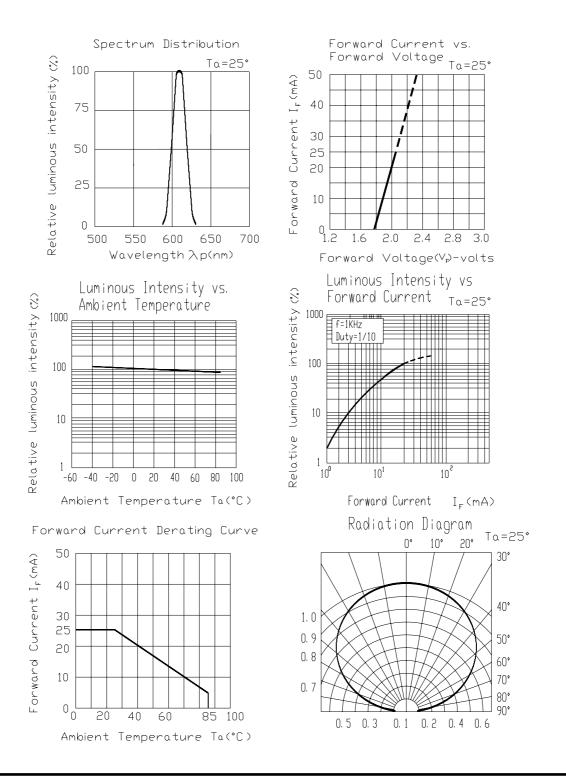

Everlight Electronics Co., Ltd. Device No. : SZDSE-175-S03 http://www.everlight.com Prepared date: 16-Oct-2006 Rev.1 Page: 5 of 10 Prepared by:Lu zhongwei

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

17-215/S2C-AN2Q1B/3T

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

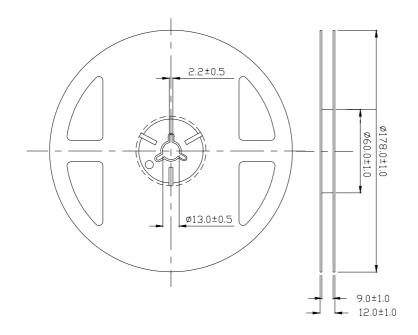


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : SZDSE-175-S03 http://www.everlight.com Prepared date: 16-Oct-2006 Rev.1 Page: 6 of 10 Prepared by:Lu zhongwei

EVERLIGHT EVERLIGHT ELECTRONICS CO.,LTD.


17-215/S2C-AN2Q1B/3T

Carrier Tape Dimensions: Loaded quantity 3000PCS per reel

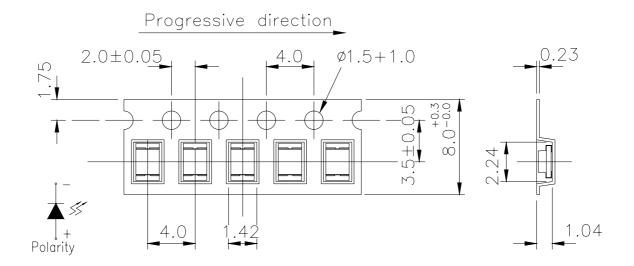

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

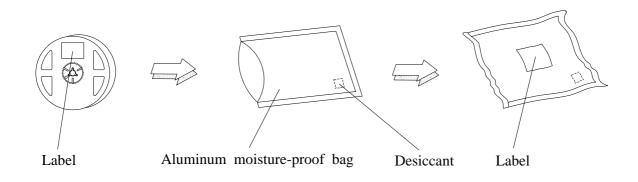

Everlight Electronics Co., Ltd. Device No. : SZDSE-175-S03 http://www.everlight.com Prepared date: 16-Oct-2006 EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

17-215/S2C-AN2Q1B/3T

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 Hrs.	22 PCS.	0/1


17-215/S2C-AN2Q1B/3T

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90% RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30℃ or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

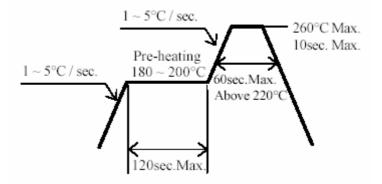

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.


17-215/S2C-AN2Q1B/3T

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

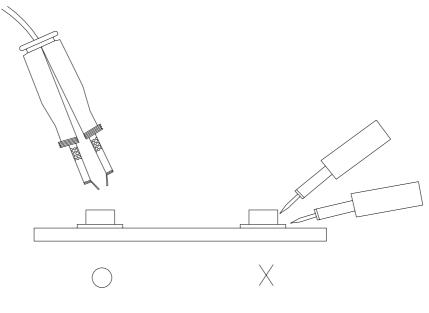

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com

Everlight Electronics Co., Ltd. Device No. : SZDSE-175-S03 http://www.everlight.com Prepared date: 16-Oct-2006 Rev.1 Page: 10 of 10 Prepared by:Lu zhongwei