

# DATASHEET

# SMD • MID Power LED 67-21S/KK6C-HXXX34Z15/2T(CLW)



#### Features

- PLCC-2 package
- Top view white LED
- High luminous intensity output
- Wide viewing angle
- Pb-free
- ANSI Binning
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br<900ppm,Cl<900ppm,Br+Cl<1500ppm)


## Description

The Everlight 67-21S package has high efficacy, high CRI, low power consumption, wide viewing angle and a compact form factor. These features make this package an ideal LED for all lighting applications.

## **Applications**

- · General lighting
- · Decorative and Entertainment Lighting
- Indicators
- Illumination
- · Switch lights

### **Product Number Explanation**

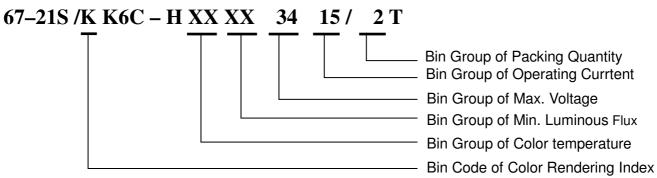

### **Table of Color Rendering Index**

Symbol	Description
М	CRI(Min.) : 60
Ν	CRI(Min.) : 65
L	CRI(Min.) : 70
Q	CRI(Min.) : 75
К	CRI(Min.) : 80
Р	CRI(Min.) : 85
Н	CRI(Min.) : 90

Note:

Tolerance of Color Rendering Index: ±2

#### **Table of Forward Current Index**

Symbol	Description			
15	I <sub>F</sub> :150mA			
Table of Forward Voltage Index				
Symbol	Description			
3.4	3.4V max			

Example:

67-21S/KK6C-H406534Z15/2T(CLW)

CRI	80(Min.)				
ССТ	4000K				
Flux	65lm min				
V <sub>F</sub>	3.4V max				
l <sub>F</sub>	150mA				

## **Mass Production List**

Product	CRI Min. <sub>(1)</sub>	CCT(K)	Φ(lm) Min. (2)
67-21S/KK6C-H406534Z15/2T(CLW)	80	4000K	65

Notes:

- Tolerance of Color Rendering Index: ±2
  Tolerance of Luminous flux: ±11%.

### **Device Selection Guide**

Chip Materials	Emitted Color	Resin Color
	Cool White	
InGaN	Neutral White	Water Clear
	Warm White	

### Absolute Maximum Ratings (T<sub>Soldering</sub>=25°C)

Parameter	Symbol	Rating	Unit	
Forward Current	I <sub>F</sub>	180	mA	
Peak Forward Current (Duty 1/10 @10ms)	I <sub>FP</sub>	300	mA	
Power Dissipation	P <sub>d</sub>	630	mW	
Operating Temperature	T <sub>opr</sub>	-40 ~ +85	°C	
Storage Temperature	T <sub>stg</sub>	-40 ~ +100	°C	
Thermal Resistance (Junction / Soldering point)	R <sub>th J-S</sub>	21	°C/W	
Junction Temperature	Τ <sub>j</sub>	115	C°	
Soldering Temperature	т	Reflow Soldering : 260 °C for 10 sec.		
	T <sub>sol</sub>	Hand Soldering : 350 °C for 3 sec.		

Note:

The products are sensitive to static electricity and must be carefully taken when handling products

# Electro-Optical Characteristics (T<sub>Soldering</sub>=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Flux <sub>(1)</sub>	Φ	65			lm	I <sub>F</sub> =150mA
Forward Voltage(2)	V <sub>F</sub>			3.4	V	I <sub>F</sub> =150mA
Color Rendering Index <sub>(3)</sub>	Ra	80				I <sub>F</sub> =150mA
Viewing Angle	20 <sub>1/2</sub>		120		deg	I <sub>F</sub> =150mA
Reverse Current	lr			50	μΑ	$V_R = 5V$

Notes:

1. Tolerance of Luminous flux: ±11%.

2. Tolerance of Forward Voltage: ±0.1V.

3. Tolerance of Color Rendering Index: ±2

#### DATASHEET SMD • MID Power LED 67-21S/KK6C-HXXXX34Z15/2T(CLW)

# **EVERLIGHT**

## **Bin Range of Luminous Flux**

Bin Code	Min.	Max.	Unit	Condition
6570	65	70	1	150~
7075	70	75	- Lm	I <sub>F</sub> =150mA

Note:

Tolerance of Luminous flux: ±11%.

### **Bin Range of Forward Voltage**


Group	Bin Code	Min.	Max.	Unit	Condition
	35	2.8	2.9		
	36	2.9	3.0		
2834	37	3.0	3.1		1. 150 1
2034	38	3.1	3.2	- V	I <sub>F</sub> =150mA
	39	3.2	3.3	-	
	40	3.3	3.4	_	

Note:

Tolerance of Forward Voltage: ±0.1V.

#### DATASHEET SMD • MID Power LED 67-21S/KK6C-HXXXX34Z15/2T(CLW)

# The C.I.E. 1931 Chromaticity Diagram

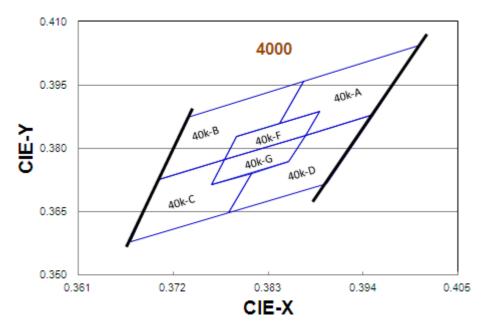

### **Bin Range of Chromaticity Coordinates**

ССТ	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y		
		0.4006	0.4044		0.3952	0.3880		
		0.3871	0.3959		0.3873	0.3831		
	40K-A	0.3843	0.3858	40K-D	0.3854	0.3768		
	40K-A	0.3890	0.3887	40K-D	0.3810	0.3741		
		0.3873	0.3831		0.3784	0.3647		
		0.3952	0.3880	-	0.3898	0.3716		
		F	Reference Range:	3700K~3970K				
	40K-B	0.3871	0.3959	40K-C	0.3703	0.3726		
40001/		0.3736	0.3874		0.3670	0.3578		
4000K		0.3703	0.3726		0.3784	0.3647		
		0.3779	0.3773		0.3810	0.3741		
		0.3793	0.3828		0.3764	0.3713		
		0.3843	0.3858		0.3779	0.3773		
	Reference Range:3970K~4270K							
		0.3890	0.3887		0.3873	0.3831		
	40K-F	0.3793	0.3828	40K-G	0.3779	0.3773		
		0.3779	0.3773	40K-G	0.3764	0.3713		
		0.3873	0.3831		0.3854	0.3768		
		F	Reference Range:	3870K~4080K				

Notes:


1. The value is based on driving current by 150mA.

2. Tolerance of Chromaticity Coordinates: ±0.01.

#### DATASHEET SMD • MID Power LED 67-21S/KK6C-HXXXX34Z15/2T(CLW)

**EVERLIGHT** 

# **Spectrum Distribution**

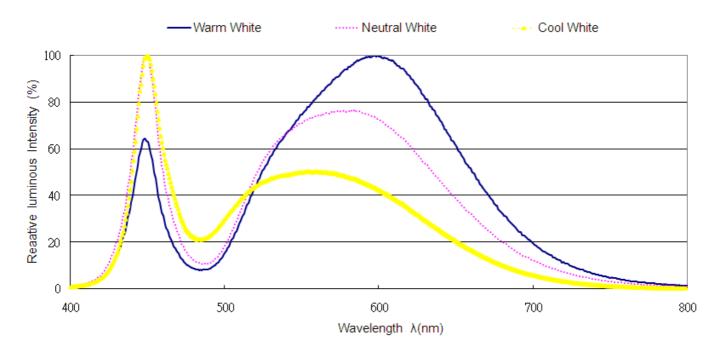

## **Typical Electro-Optical Characteristics Curves**



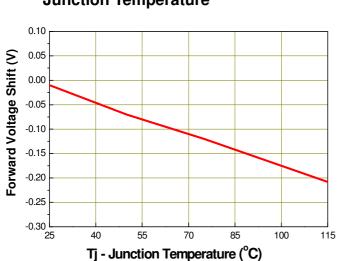



Fig.1 – Forward Voltage Shift vs. **Junction Temperature** 

Fig.2 - Relative Luminous Intensity vs. Forward Current

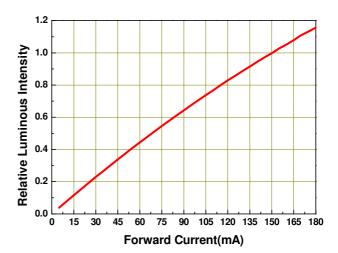

## **Typical Electro-Optical Characteristics Curves**



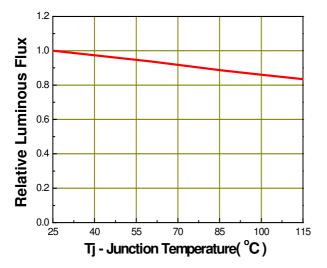



Rth j-s=21 C/W



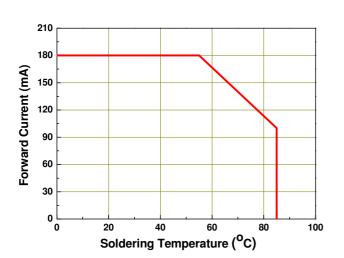


Fig.4 - Forward Current vs. Forward Voltage




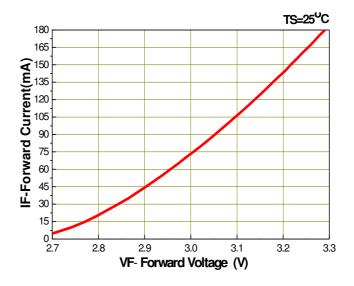

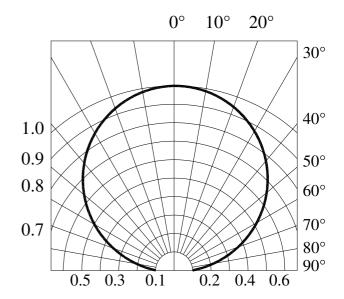

**EVERLIGHT** 

# Package Dimension

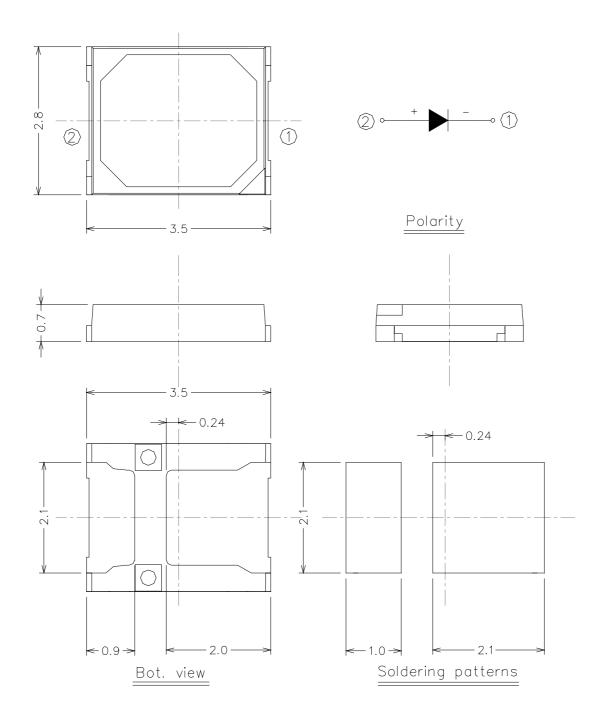

# Note: Tolerance unless mentioned is $\pm 0.15$ mm; Unit = mm


### **Moisture Resistant Packing Materials**

#### Label Explanation



#### **Reel Dimensions**


- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

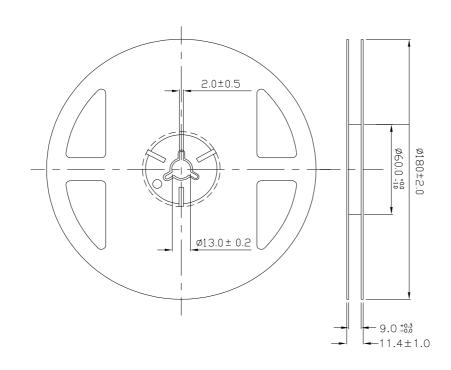

#### Note: Tolerances unless mentioned ±0.1mm. Unit = mm




#### Carrier Tape Dimensions: Loaded Quantity 16000 pcs Per Reel

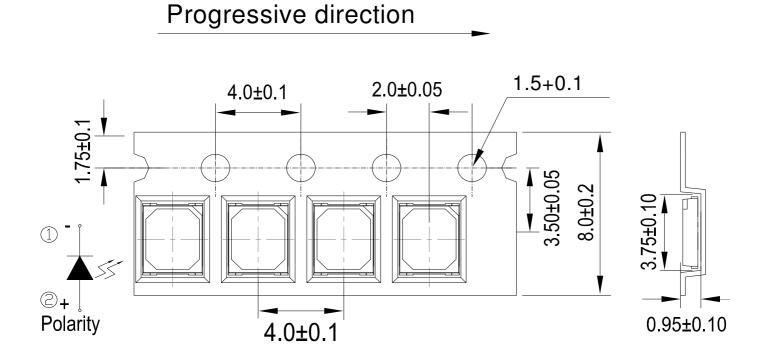

#### Note:

1.Tolerance unless mentioned is ±0.1mm; Unit = mm

#### **Moisture Resistant Packing Process**

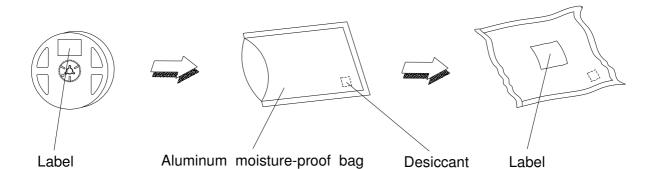

# **Reliability Test Items and Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90% LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C/10sec.	6 Min.	22 PCS.	0/1
2	Thermal Shock	H : +100℃ 20min ∫ 10 sec L : -10℃ 20min	200 Cycles	22 PCS.	0/1
3	Temperature Cycle	H : +100°C 30min ∫ 5 min L : -40°C 30min	200 Cycles	22 PCS.	0/1
4	High Temperature/Humidity Reverse Bias	Ta=85°C,85%RH	1000 Hrs.	22 PCS.	0/1
5	High Temperature/Humidity Operation	Ta=85°C,85%RH, I <sub>F</sub> = 100 mA	1000 Hrs.	22 PCS.	0/1
6	Low Temperature Storage	Ta=-40°C	1000 Hrs.	22 PCS.	0/1
7	High Temperature Storage	Ta=85°C	1000 Hrs.	22 PCS.	0/1
8	Low Temperature Operation Life	Ta=-40°C, I <sub>F</sub> = 180 mA	1000 Hrs.	22 PCS.	0/1
9	High Temperature Operation/ Life#1	Ta=25°C, I <sub>F</sub> = 180 mA	1000 Hrs.	22 PCS.	0/1
10	High Temperature Operation/ Life#2	Ta=55℃, I <sub>F</sub> =180 mA	1000 Hrs.	22 PCS.	0/1
11	High Temperature Operation/ Life#3	Ta=85°C, I <sub>F</sub> = 100 mA	1000 Hrs.	22 PCS.	0/1

#### **Precautions for Use**


1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 168 Hrs under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

- 3. Soldering Condition
  - 3.1 Pb-free solder temperature profile

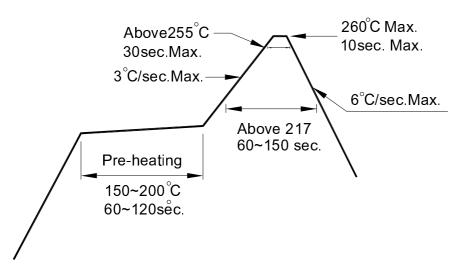

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

#### DISCLAIMER

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.

2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.

3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.

4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.

6. This product is not intended to be used for military, aircraft, automotive, medical,