


IRM-H9xx/TR2

Features

- · High protection ability against EMI
- · Available for various carrier frequencies
- · Min burst length: 10 cycles
- · Min gap length: 14 cycles
- · Low operating voltage and low power consumption
- · High immunity against ambient light
- · Long reception range
- · High sensitivity
- · Pb free and RoHS compliant



Pin Configuration

- 1. GND
- 2. GND
- 3. OUT
- 4. Vcc

Descriptions


The device is miniature SMD type infrared receiver that has been developed and designed by utilizing the latest IC technology.

The PIN diode and preamplifier are assembled onto a lead frame and molded into a black epoxy package which operates as an IR filter. The demodulated output signal can directly be decoded by a microprocessor


Applications

- · Light detecting portion of remote control
- · AV instruments such as Audio, TV, VCR, CD, MD, etc
- · Home appliances such as Air-conditioner, Fan, etc
- Other devices using IR remote control
- · CATV set top boxes
- · Multi-media Equipment

Block Diagram



Application Circuit



RC Filter should be connected closely between Vcc pin and GND pin.

Everlight Electronics Co., Ltd. Document No: DMO-0000201

Rev. 1

http:\\www.everlight.com August 20, 2010

Release Date:




IRM-H9xx/TR2

Parts Table


Model No.	Carrier Frequency		
IRM-H936/TR2	36 kHz		
IRM-H938/TR2	38 kHz		

Package Dimenstions

(Dimensions in mm)

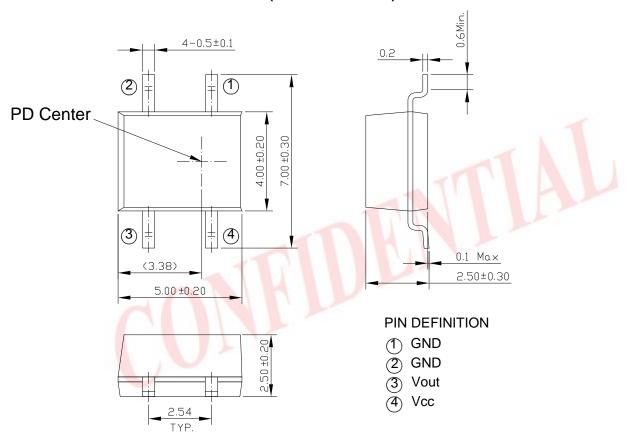

Recommended pad layout for surface mount leadform



Everlight Electronics Co., Ltd. Document No: DMO-0000201

Rev. 1

http:\\www.everlight.com August 20, 2010

LifecyclePhase:正式發行



IRM-H9xx/TR2

Absolute Maximum Ratings (T_a=25°C)

Parameter	Symbol	Rating	Unit		
Supply Voltage	Vs	6	V		
Operating Temperature	Topr	-20 ~ +80			
Storage Temperature	Tstg	-40 ~ +85			
Soldering Temperature *1	Tsol	260			

^{*1 4}mm from mold body less than 10 seconds

Electro-Optical Characteristics (Ta=25 and Vcc=3.0V)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Current Consumption	Icc	-	0.4	0.6	mA	No signal input
Supply Voltage	Vs	2.7	-	5.5	V	
Peak Wavelength	λρ	-	940	1-1	nm	1
Reception Distance	Lo	8	M-M	13	1	See chapter ,Test method'
	L ₄₅	5	VII	17	m	
High Level Pulse Width	T _{WH}	450	-	750	μs	Test signal
Low Level Pulse Width	T _{WL}	450	-	750	μs	- according to figure 1
High Level Output Voltage	V _H	Vcc-0.4	-	-	V	
Low Level Output Voltage	V _L	-	0.2	0.5	V	I _{SINK} 2mA
Internal pull up resistor	R _{PU}	85	100	115	kΩ	

Everlight Electronics Co., Ltd. Document No: DMO-0000201

Rev. 1

http:\\www.everlight.com August 20, 2010

Revision



IRM-H9xx/TR2


Test Method

The specified electro-optical characteristic is satisfied under the following Conditions:

- 1. Measurement environment
 - A place without extreme light reflected
- 2. External light
 - Ordinary white fluorescent lamps (Light source temperature 2856°K, Ee 10Lux) without high frequency modulation
- 3. Standard transmitter
 - The test transmitter is calibrated by using the circuit shown in figure 2. The radiation intensity of the transmitter is adjusted until **Vo=400mVp-p.** Both, the test transmitter and the photo diode, have a peak wavelength of 940nm. The photo diode for calibration is PD438B (λp=940nm, Vr=5V).
- 4. Measuring system According to the measuring system shown in Fig.-3

Fig.-1 Transmitter Wave Form

D.U.T output Pulse








Fig.-2 Measuring Method

Fig.-3 Measuring System






Everlight Electronics Co., Ltd. Document No: DMO-0000201

4 Rev. 1 http:\\www.everlight.com August 20, 2010



IRM-H9xx/TR2

Typical Performance Curves



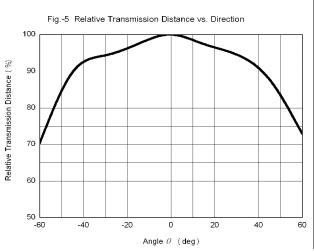


Fig.6 Variation Output Pulse Width vs. Distance

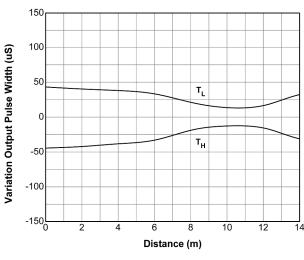


Fig.7 Relative Sensitivity vs. Supply Voltage


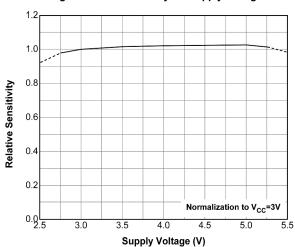


Fig.8 Relative Sensitivity vs. Carrier Frequency



Everlight Electronics Co., Ltd. Document No: DMO-0000201

5 Rev. 1 http:\\www.everlight.com August 20, 2010

Revision: (1)

: (1)

LifecyclePhase:正式發行

Release Date:

Expired Period: Forever



IRM-H9xx/TR2

Code information

Protocol	Suitable	Protocol	Suitable
JVC	Yes	RCA	No
Matsushita	Yes	Sharp	Yes
Mitsubishi	No	Sony 12 Bit	Yes
NEC	Yes	Sony 15 Bit	No
RC5	Yes	Sony 20Bit	No
RC6	Yes	Toshiba	Yes
RCMM	No	Zenith	Yes
RCS-80	No	Continuous Code	No

Everlight Electronics Co., Ltd. Document No: DMO-0000201


Revision : (1)

LifecyclePhase:正式發行



IRM-H9xx/TR2

Tape & Reel Packing Specifications

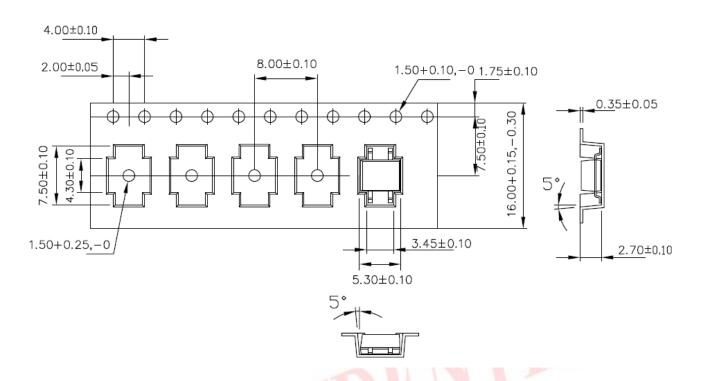

Packing Quantity

1000 pcs / Reel

5 Reels / Carton

Everlight Electronics Co., Ltd. Document No: DMO-0000201

: (1) LifecyclePhase:正式發行

Revision

Rev. 1

http:\\www.everlight.com August 20, 2010


Release Date:


Expired Period: Forever



IRM-H9xx/TR2

Label format





Moisture Classification-storage and used condition label

Recommended method of storage

The following are general recommendations for moisture sensitive level (MSL) 4 storage and use:

- 1. Shelf life in sealed bag from the bag seal date: 12 months at < 40 °C and < 90% relative humidity (RH)
- 2. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must mounted within 72 hours of factory conditions < 30 °C/60%RH.
- 3. If the moisture absorbent material (silica gel) has faded away or the IRM has exceeded the storage time. Baking treatment is required, refer to IPC/JEDEC J-STD-033 for bake procedure or recommend the conditions: 60±5°C for 96 hours.

ESD Precaution

Proper storage and handing procedures should be followed to prevent ESD damage to the devices especially when they are removed from the Anti-static bag. Electro-Static Sensitive Devices warning labels are on the packing.

Everlight Electronics Co., Ltd. Document No: DMO-0000201


Rev. 1

http:\\www.everlight.com August 20, 2010



IRM-H9xx/TR2

Solder Reflow Temperature Profile

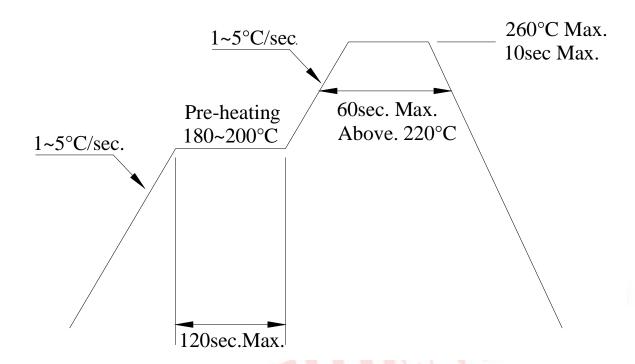

Note:

- Reflow soldering should not be done more than two times.
 When soldering, do not put stress on the IRM device during heating.

3. After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. Document No: DMO-0000201

Rev. 1

http:\\www.everlight.com August 20, 2010



IRM-H9xx/TR2

DISCLAIMER

- 1. EVERLIGHT will reserve the right to make changes on specification and material but with notice.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.



Everlight Electronics Co., Ltd. Document No: DMO-0000201

Revision: (1)

LifecyclePhase:正式發行

10 Rev. 1 http:\\www.everlight.com August 20, 2010

Release Date:

Expired Period: Forever