

Technical Data Sheet

Chip LED with Right Angle Lens

MT27-21/GBC-ZR1S2B16Y/3C

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb free
- The product itself will remain within RoHS compliant version

Descriptions

- The 27-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Part No.	Chip Material	Emitted Color	Resin Color	
27-21/GBC-ZR1S2B16Y/3C	InGaN	Brilliant Green	Water Clear	



Everlight Electronics Co., Ltd.

Prepared date: 04-Sep.-2009

http://www.everlight.com

Rev 1 Page: 1 of 10

Device No:DSE-0000820

Ver.: Release Date:


狀態:

Prepared by: Li hui



MT27-21/GBC-ZR1S2B16Y/3C

Package Outline Dimensions

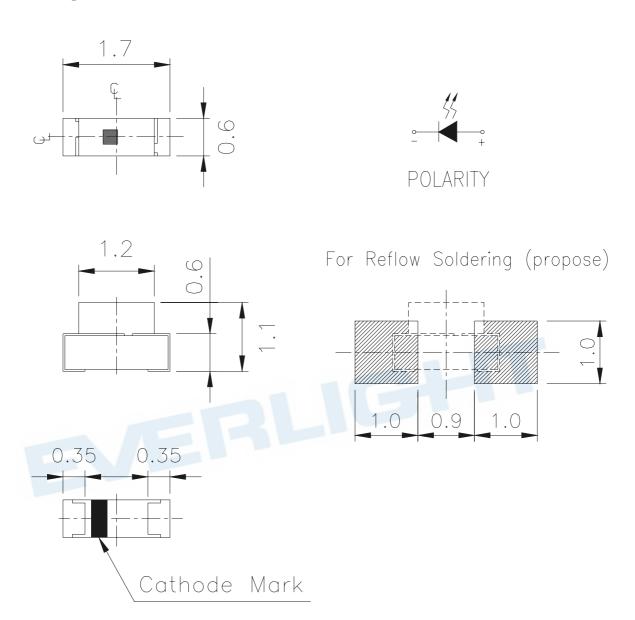

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-0000820

Prepared date: 04-Sep.-2009

http://www.everlight.com

Release Date:

Rev 1

狀態:

Page: 2 of 10

Prepared by: Li hui



MT27-21/GBC-ZR1S2B16Y/3C

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	$ m I_F$	30	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	100	mA
Power Dissipation	P_{d}	110	mW
Electrostatic Discharge(HBM)	ESD	1000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.	

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I_{V}	112		285	mcd	
Viewing Angle	2 0 1/2		130		deg	
Peak Wavelength	λр		518		nm	
Dominant Wavelength	λd	520		540	nm	$I_F=5mA$
Spectrum Radiation Bandwidth	Δλ		35		nm	
Forward Voltage	V_{F}	2.5		3.2	V	
Reverse Current	I_R			50	μ A	V _R =5V

Notes:

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 10

Device No:DSE-0000820 Prepared date: 04-Sep.-2009 Prepared by: Li hui



MT27-21/GBC-ZR1S2B16Y/3C

Bin Range Of Dom. Wavelength

Groups	Bin	Min	Max	Unit	Condition
Z	X	520	525		I _F =5mA
	Y	525	530	nm	
	Z	530	535		
	V	535	540		

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
R1	112	140	mcd	I _F =5mA
R2	140	180		
S 1	180	225		
S2	225	285		

Bin Range Of Forward Voltage

Groups	Bin	Min	Max	Unit	Condition
	27	2.50	2.60		
	28	2.60	2.70		
	29	2.70	2.80		
B16	30	2.80	2.90	V	I _F =5mA
	31	2.90	3.00		
	32	3.00	3.10		
	33	3.10	3.20		

Notes:

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev 1

Page: 4 of 10

Device No:DSE-0000820


Prepared date: 04-Sep.-2009


Prepared by: Li hui




MT27-21/GBC-ZR1S2B16Y/3C


Typical Electro-Optical Characteristics Curves









Forward Current Denating Curve




Forward Current vs.



roimaid voltage vr (v)



Radiation Diagram



Everlight Electronics Co., Ltd.

Device No:DSE-0000820

http://www.everlight.com

Rev 1

Page: 5 of 10

Prepared date: 04-Sep.-2009

Prepared by: Li hui




MT27-21/GBC-ZR1S2B16Y/3C


Label explanation

CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



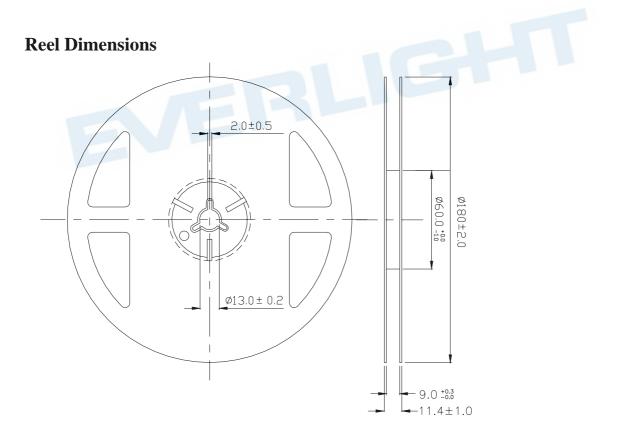

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-0000820

http://www.everlight.com

Rev 1

Page: 6 of 10


Prepared date: 04-Sep.-2009

Prepared by: Li hui




MT27-21/GBC-ZR1S2B16Y/3C

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

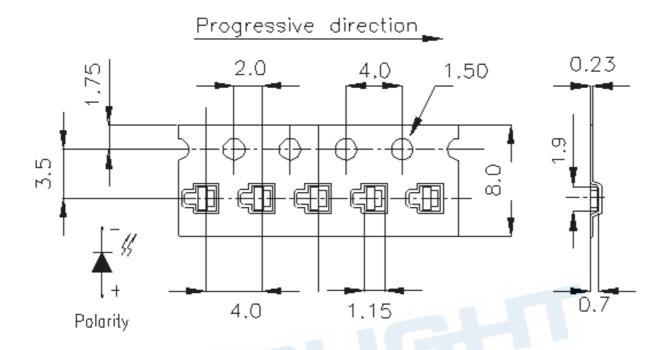

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

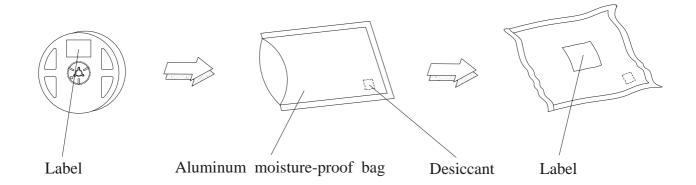

Everlight Electronics Co., Ltd. Device No:DSE-0000820

Prepared date: 04-Sep.-2009

http://www.everlight.com

Rev 1

Page: 7 of 10

Prepared by: Li hui



MT27-21/GBC-ZR1S2B16Y/3C

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd.

Device No:DSE-0000820

http://www.everlight.com Prepared date: 04-Sep.-2009 Rev 1 Page: 8 of 10 Prepared by: Li hui




MT27-21/GBC-ZR1S2B16Y/3C

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : $60\pm5^{\circ}$ C for 24 hours.
- 3. Soldering Condition
- 3.1Pb-free solder temperature profile

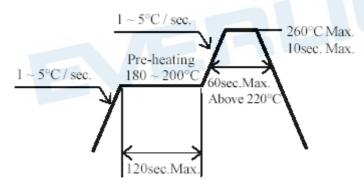

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd.

Device No:DSE-0000820

http://www.everlight.com

Rev 1

狀態:

Page: 9 of 10

Prepared date: 04-Sep.-2009

Prepared by: Li hui

Release Date: Ver.:




MT27-21/GBC-ZR1S2B16Y/3C

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

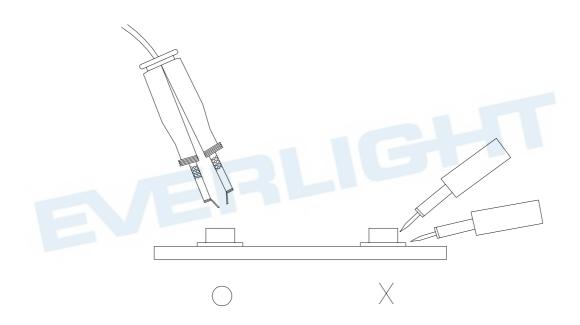

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1

Device No:DSE-0000820 Prepared date: 04-Sep.-2009

Page: 10 of 10 Prepared by: Li hui