

July 2015

Multilayer Balun

For 2300-2700MHz

HHM1946A1

1.0x0.5mm [EIA 0402]*

* Dimensions Code JIS[EIA]




Multilayer Balun

For 2300-2700MHz


Conformity to RoHS Directive

HHM1946A1


SHAPES AND DIMENSIONS



[Bottom view]



■ RECOMMENDED LAND PATTERN



Dimensions in mm

OROHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



HHM1946A1

ELECTRICAL CHARACTERISTICS

| Item | Frequency Range (MHz) | Min. | Тур. | Max. |
|---|--------------------------|------|-------|------|
| balanced Port Characteristic Impedance (Ω) 50 (Nominal) | | | | |
| Balanced Port Characteristic Impedance (Ω) | 100 (Nominal) | | | |
| Return Loss at Unbalanced Port (dB) | 2300 to 2700 | 10 | 23 | _ |
| Phase Balance (deg.) | 2300 to 2700 | 170 | 181.1 | 190 |
| Amplitude Balance (dB) | 2300 to 2700 | -2.5 | -1.13 | 2.5 |
| Insertion Loss (dB) | 2300 to 2700 | _ | 0.26 | 0.50 |

■TEMPERATURE RANGE

| Operating temperature | Storage temperature | | |
|-----------------------|---------------------|--|--|
| (°C) | (°C) | | |
| -40 to +85 | -40 to +85 | | |


All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.




HHM1946A1

■ FREQUENCY CHARACTERISTICS


□INSERTION LOSS




_AMPLITUDE BALANCE



□RETURN LOSS



□PHASE BALANCE




[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



■ RECOMMENDED REFLOW PROFILE

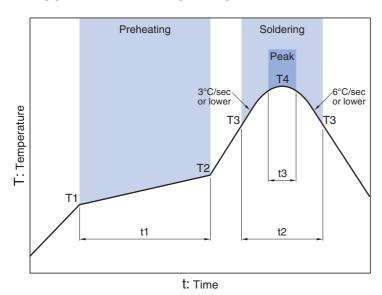

| Preheating | | | Soldering Critical zone (T3 to T4) Peak | | | |
|------------|-------|--------------|---|--------------|--------------|------------|
| Temp. | | Time | Temp. | Time | Temp. | Time |
| T1 | T2 | t1 | T3 | t2 | T4 | t3* |
| 150°C | 200°C | 60 to 120sec | 217°C | 60 to 120sec | 240 to 260°C | 30sec max. |

^{*}t3: Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.