




## General Description:

CS5N20 A4, the silicon N-channel Enhanced VDMOSFETs, is obtained by the self-aligned planar Technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor can be used in various power switching circuit for system miniaturization and higher efficiency. The package form is TO-252, which accords with the RoHS standard..

$V_{DSS}$	200	V
$I_D$	4.8	A
$P_D$ ( $T_C=25^\circ\text{C}$ )	40	W
$R_{DS(\text{ON})\text{Typ}}$	0.49	$\Omega$

TO-252




## Features:

- | Fast Switching
- | Low ON Resistance( $R_{DS(on)} \leq 0.65\Omega$ )
- | Low Gate Charge (Typical Data:7nC)
- | Low Reverse transfer capacitances(Typical:8pF)
- | 100% Single Pulse avalanche energy Test

## Applications:

Power switch circuit of adaptor and charger.

Inner Equivalent Principium Chart



**Absolute** ( $T_J = 25^\circ\text{C}$  unless otherwise specified):

Symbol	Parameter	Rating	Units
$V_{DSS}$	Drain-to-Source Voltage	200	V
$I_D$	Continuous Drain Current $T_C = 25^\circ\text{C}$	4.8	A
	Continuous Drain Current $T_C = 100^\circ\text{C}$	3.4	A
$I_{DM}^{a1}$	Pulsed Drain Current $T_C = 25^\circ\text{C}$	19.2	A
$V_{GS}$	Gate-to-Source Voltage	$\pm 30$	V
$E_{AS}^{a2}$	Single Pulse Avalanche Energy	125	mJ
$dv/dt^{a3}$	Peak Diode Recovery $dv/dt$	5	V/ns
$P_D$	Power Dissipation $T_C = 25^\circ\text{C}$	40	W
	Derating Factor above $25^\circ\text{C}$	0.32	$\text{W}/^\circ\text{C}$
$T_J, T_{stg}$	Operating Junction and Storage Temperature Range	150, -55 to 150	$^\circ\text{C}$



# CS5N20 A4



**Electrical Characteristics** ( $T_J = 25^\circ\text{C}$  unless otherwise specified):

OFF Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$V_{DSS}$	Drain to Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu\text{A}$	200	--	--	V
$\Delta BV_{DSS}/\Delta T_J$	Bvdss Temperature Coefficient	$I_D=250\mu\text{A}, \text{Reference } 25^\circ\text{C}$	--	0.26	--	$^\circ\text{C}/\text{V}$
$I_{DSS}$	Drain to Source Leakage Current	$V_{DS} = 200\text{V}, V_{GS} = 0\text{V}, T_J = 25^\circ\text{C}$	--	--	1	$\mu\text{A}$
		$V_{DS} = 160\text{V}, V_{GS} = 0\text{V}, T_J = 125^\circ\text{C}$			10	
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS} = 30\text{V}$	--	--	100	nA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS} = -30\text{V}$	--	--	-100	nA

ON Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$R_{DS(ON)}$	Drain-to-Source On-Resistance	$V_{GS}=10\text{V}, I_D=2.9\text{A}$	--	0.49	0.65	$\Omega$
$V_{GS(\text{TH})}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	2.0		4.0	V
Pulse width $t_p \leqslant 300\mu\text{s}, \delta \leqslant 2\%$						

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$g_{fs}$	Forward Trans conductance	$V_{DS}=15\text{V}, I_D = 2.9\text{A}$		2.0	--	S
$C_{iss}$	Input Capacitance		--	255		pF
$C_{oss}$	Output Capacitance	$V_{GS} = 0\text{V} V_{DS} = 25\text{V}$ $f = 1.0\text{MHz}$	--	52		
$C_{rss}$	Reverse Transfer Capacitance		--	8		

Resistive Switching Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	$I_D = 4.8\text{A} V_{DD} = 100\text{V}$ $V_{GS} = 10\text{V} R_G = 10\Omega$	--	7	--	ns
$tr$	Rise Time		--	13	--	
$t_{d(OFF)}$	Turn-Off Delay Time		--	27	--	
$t_f$	Fall Time		--	11	--	
$Q_g$	Total Gate Charge	$I_D = 4.8\text{A} V_{DD} = 100\text{V}$ $V_{GS} = 10\text{V}$	--	7		nC
$Q_{gs}$	Gate to Source Charge		--	2		
$Q_{gd}$	Gate to Drain ("Miller")Charge		--	3		



Source-Drain Diode Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
I <sub>S</sub>	Continuous Source Current (Body Diode)	T <sub>C</sub> = 25 °C	--	--	4.8	A
I <sub>SM</sub>	Maximum Pulsed Current (Body Diode)		--	--	19.2	A
V <sub>SD</sub>	Diode Forward Voltage	I <sub>S</sub> =1.8A, V <sub>GS</sub> =0V	--	--	1.5	V
t <sub>rr</sub>	Reverse Recovery Time	I <sub>S</sub> =4.8A, T <sub>j</sub> = 25 ° C dI <sub>F</sub> /dt=100A/us, V <sub>GS</sub> =0V	--	105	--	ns
Q <sub>rr</sub>	Reverse Recovery Charge		--	380	--	nC
I <sub>RRM</sub>	Reverse Recovery Current		--	7.2	--	A
Pulse width tp≤300μs, δ≤2%						

Symbol	Parameter	Max.	Units
R <sub>θJC</sub>	Junction-to-Case	3.13	°C/W
R <sub>θJA</sub>	Junction-to-Ambient	62.5	°C/W


<sup>a1</sup>: Repetitive rating; pulse width limited by maximum junction temperature

<sup>a2</sup>: L=10.0mH, I<sub>D</sub>=5A, Start T<sub>j</sub>=25°C


<sup>a3</sup>: I<sub>SD</sub>=4.8A, dI/dt ≤ 100A/us, V<sub>DD</sub>≤BV<sub>DS</sub>, Start T<sub>j</sub>=25°C

<sup>a4</sup>: Recommend soldering temperature defined by IPC/JEDEC J-STD 020


## Characteristics Curve:

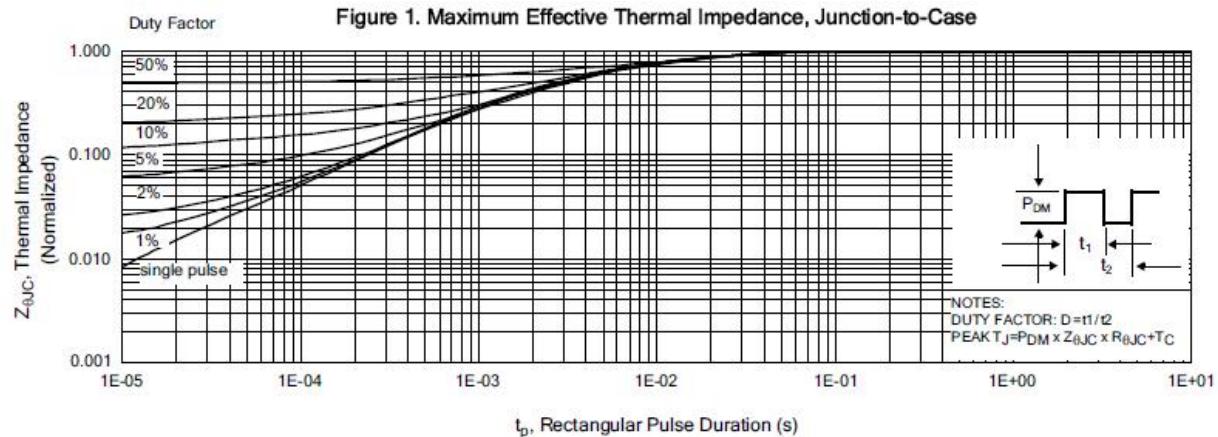


**Figure 2. Maximum Power Dissipation vs Case Temperature**

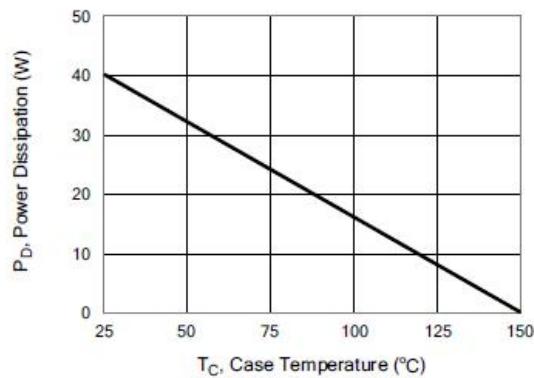

**Figure 4. Typical Output Characteristics**

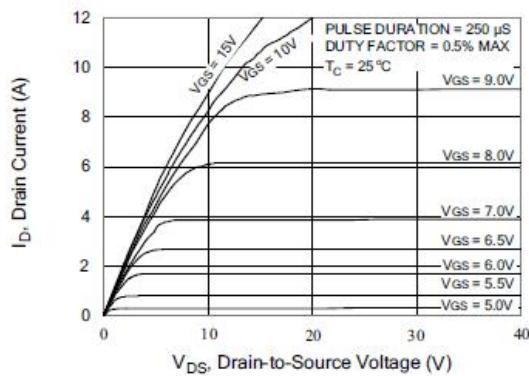

**Figure3. Maximum Continuous Drain Current vs Case Temperature**

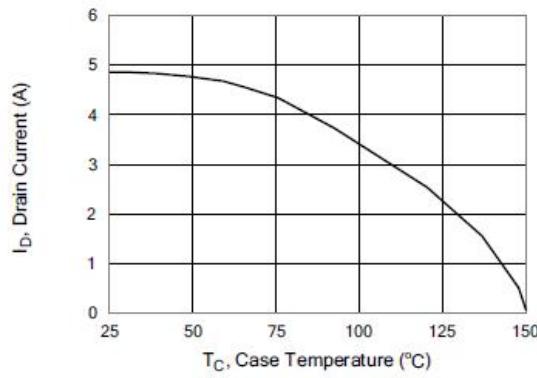

**Figure5. Typical Drain-to-Source ON Resistance vs Gate Voltage and Drain Current**

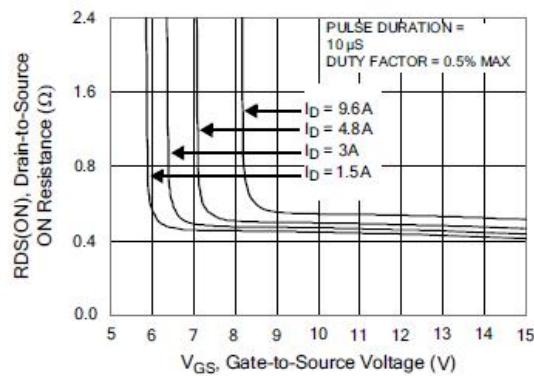




Figure 6. Maximum Peak Current Capability

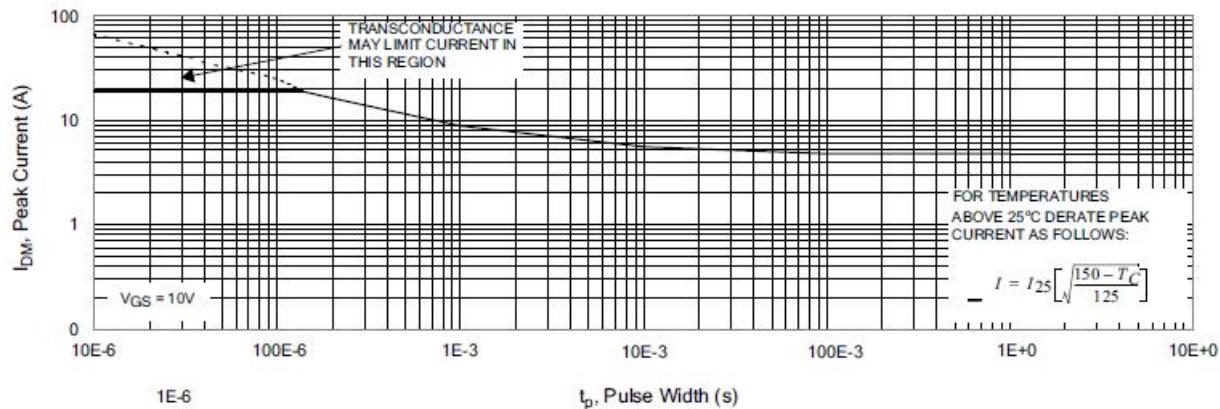


Figure 7. Typical Transfer Characteristics

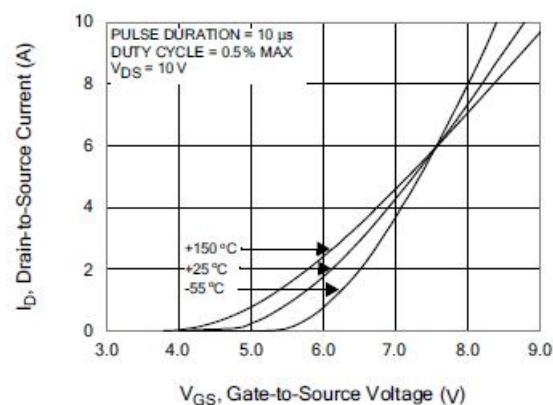


Figure 8. Unclamped Inductive Switching Capability

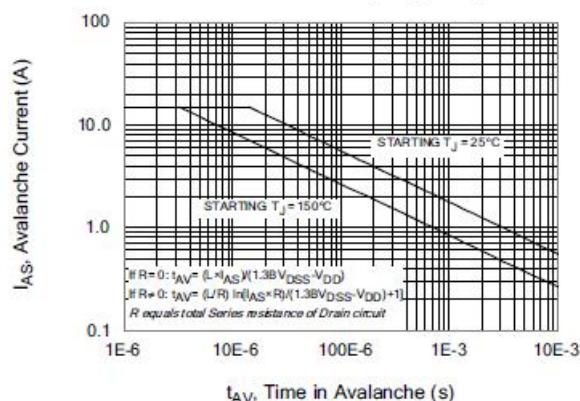


Figure 9. Typical Drain-to-Source ON Resistance vs Drain Current



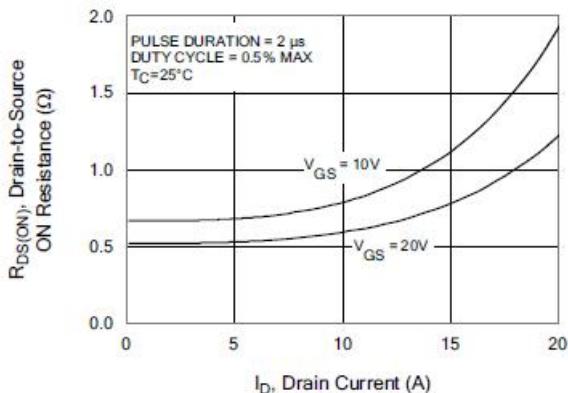



Figure 10. Typical Drain-to-Source ON Resistance vs Junction Temperature

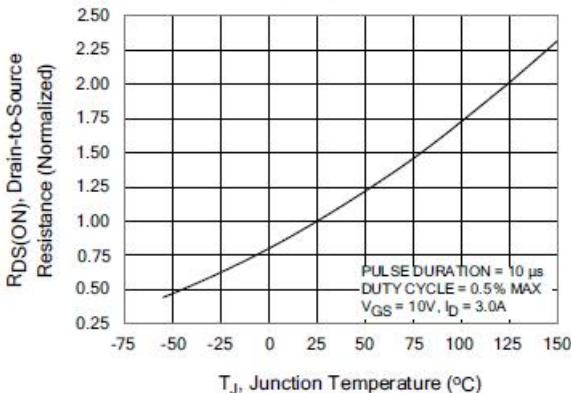


**Figure 11. Typical Breakdown Voltage vs Junction Temperature**

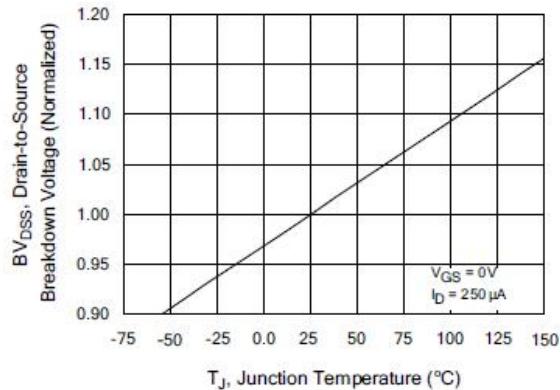


**Figure 13. Maximum Forward Bias Safe Operating Area**

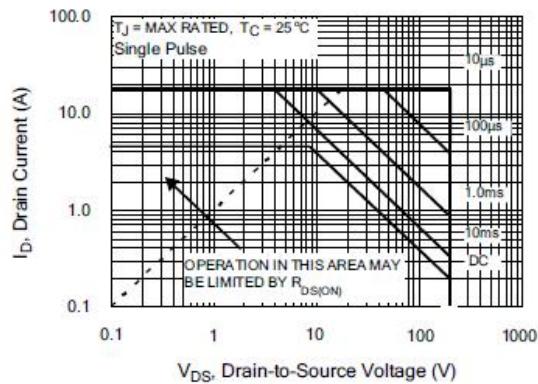


**Figure 15. Typical Gate Charge vs Gate-to-Source Voltage**

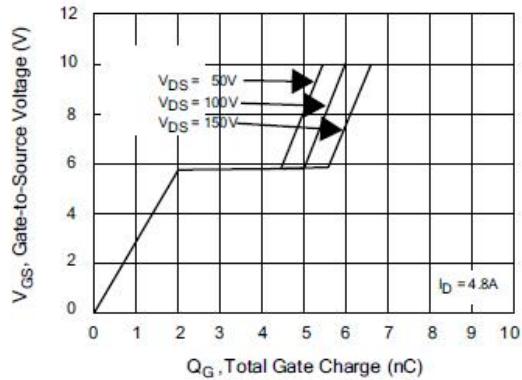


**Figure 12. Typical Threshold Voltage vs Junction Temperature**

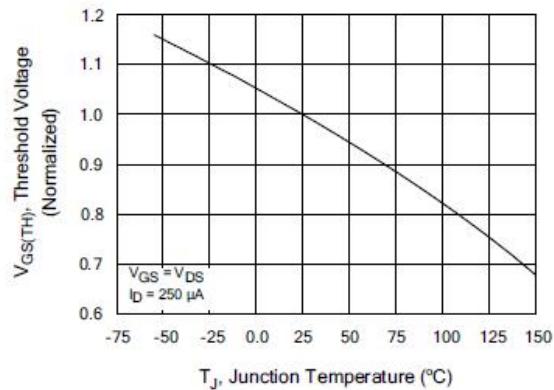

**Figure 14. Typical Capacitance vs Drain-to-Source Voltage**

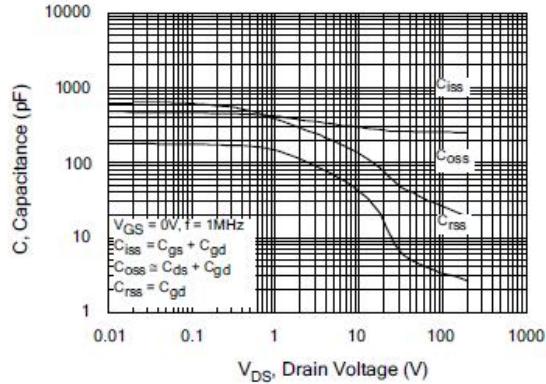

**Figure 16. Typical Body Diode Transfer Characteristics**

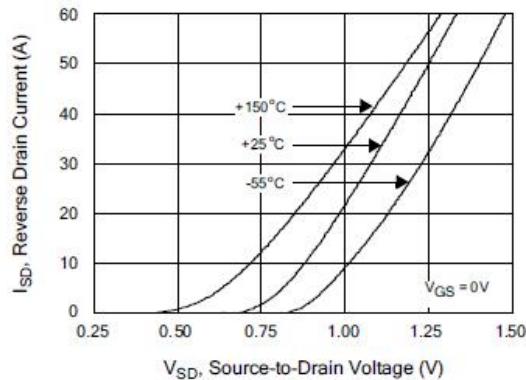

## Test Circuit and Waveform

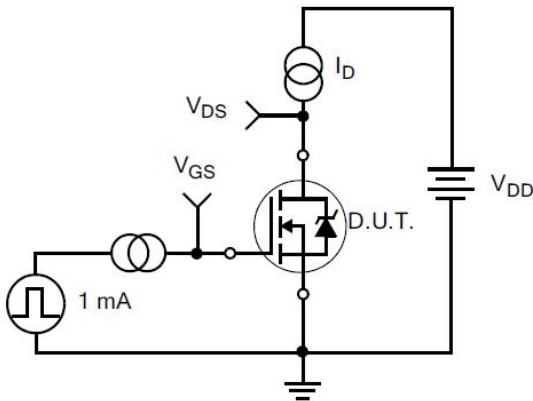


Figure 17. Gate Charge Test Circuit

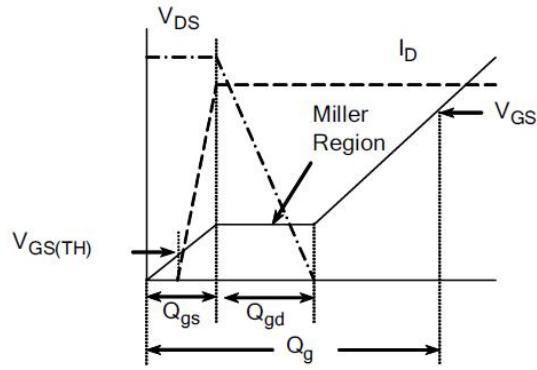


Figure 18. Gate Charge Waveform

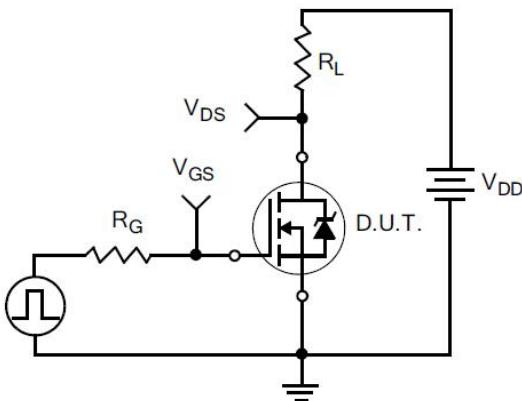


Figure 19. Resistive Switching Test Circuit

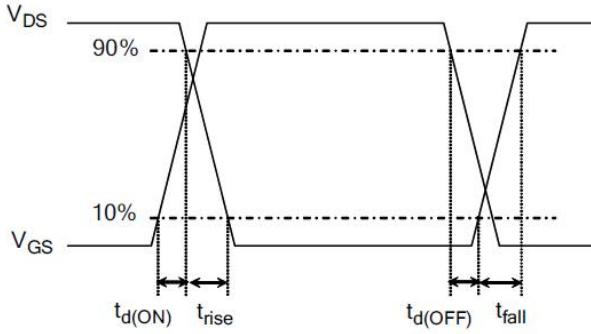


Figure 20. Resistive Switching Waveforms

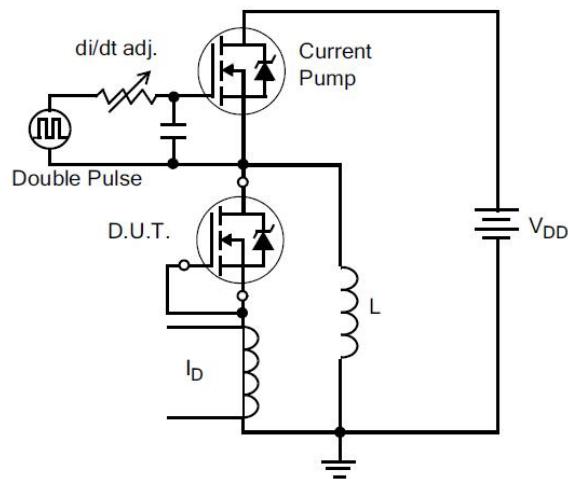


Figure 21. Diode Reverse Recovery Test Circuit

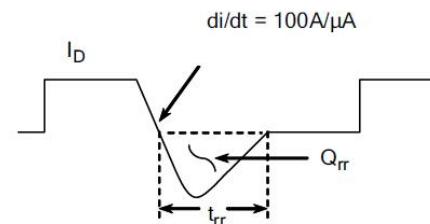


Figure 22. Diode Reverse Recovery Waveform

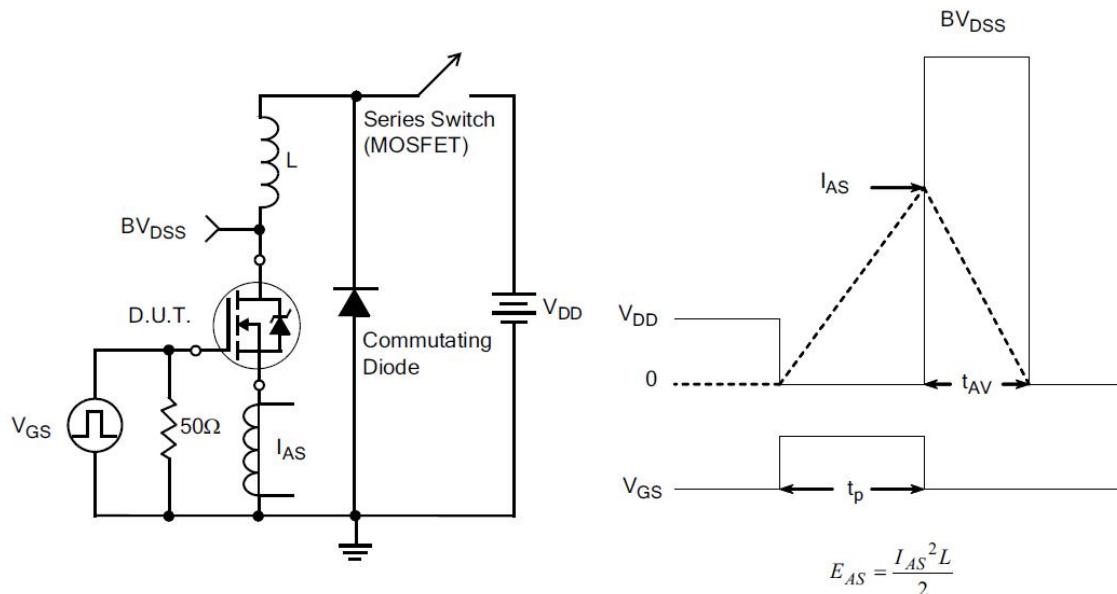


Figure 23. Unclamped Inductive Switching Test Circuit


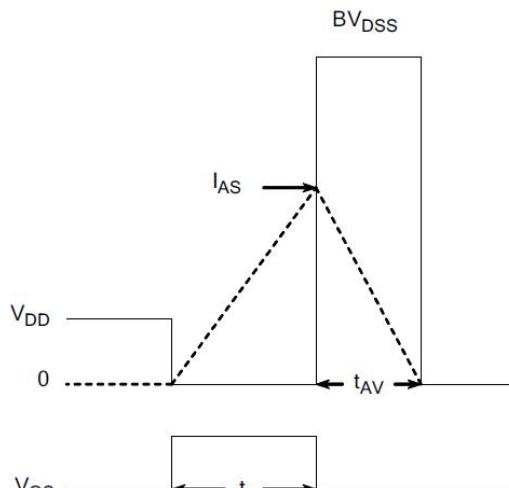


Figure 24. Unclamped Inductive Switching Waveforms



## Package Information

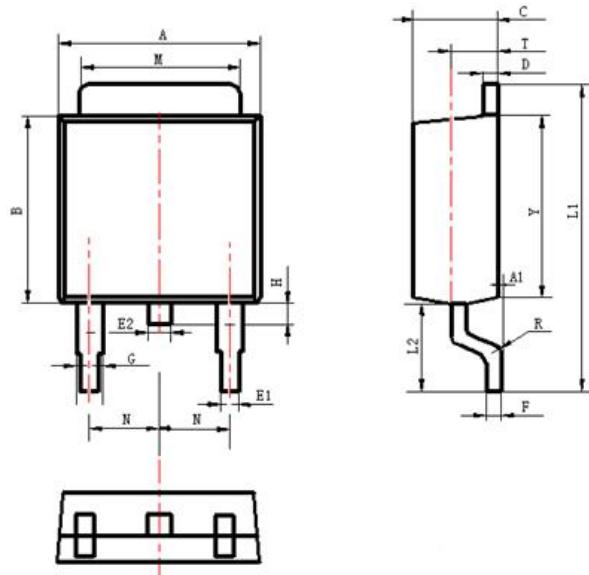

Items	Values(mm)	
	MIN	MAX
A	6.30	6.90
A1	0	0.16
B	5.70	6.30
C	2.10	2.50
D	0.30	0.70
E1	0.60	0.90
E2	0.70	1.00
F	0.30	0.60
G	0.70	1.20
L1	9.60	10.50
L2	2.70	3.10
H	0.40	1.00
M	5.10	5.50
N	2.09	2.49
R	0.3	
T	1.40	1.60
Y	5.10	6.30

TO-252 Package

**The name and content of poisonous and harmful material in products**

Part's Name	Hazardous Substance									
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	DIBP	DEHP	DBP	BBP
Limit	≤0. 1%	≤0. 1%	≤0. 01%	≤0. 1%	≤0. 1%	≤0. 1%	≤0. 1%	≤0. 1%	≤0. 1%	≤0. 1%
Lead Frame	○	○	○	○	○	○	○	○	○	○
Molding	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
Wire Bonding	○	○	○	○	○	○	○	○	○	○
Solder	×	○	○	○	○	○	○	○	○	○
Note	<p>○: Means the hazardous material is under the criterion of 2011/65/EU. ×: Means the hazardous material exceeds the criterion of 2011/65/EU. The plumbum element of solder exist in products presently, but within the allowed range of Eurogroup's RoHS.</p>									

**Warnings**

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. It is suggested to be used under 80 percent of the maximum ratings of the device.
2. When installing the heatsink, please pay attention to the torsional moment and the smoothness of the heatsink.
3. VDMOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. This publication is made by Huajing Microelectronics and subject to regular change without notice.

**WUXI CHINA RESOURCES HUAJING MICROELECTRONICS CO., LTD.**

Add: No.14 Liangxi RD. Wuxi, Jiangsu, China Mail:214061 <http://www.crhj.com.cn>  
Tel: +86 0510-85807228 Fax: +86- 0510-85800864

**Marketing Part:** Post: 214061      **Tel:** +86 0510-81805277/81805336  
**Fax:** +86 0510-85800360/85803016

**Application and Service:** Post: 214061 Tel / Fax: +86- 0510-81805243/81805110