

# **MXD8628**

0.1-3.0GHz SP2T Switch

This document contains information that is confidential and proprietary to Maxscend Technologies Inc. (Maxscend) and may not be reproduced in any form without express written consent of Maxscend. No transfer or licensing of technology is implied by this document.



### **General Description**

The MXD8628 is a CMOS silicon-on-insulator (SOI), single-pole, double-throw (SP2T) transmitting and receiving switch. The high linearity performance and low insertion loss makes the device an ideal choice for GSM/WCDMA/LTE handset and data card applications.

The MXD8628 SP2T switch is provided in a compact LGA 9-pin 1.15mm x 1.15mm x 0.45mm package. A functional block diagram is shown in Figure 1. The pin configuration and package are shown in Figure 2. Signal pin assignments and functional pin descriptions are provided in Table 1.

**Functional Block Diagram and Pin Function** 

#### **Applications**

- GSM/WCDMA/LTE receive and transmit
- 802.11b/g/n WLANs

#### Features

- Broadband frequency range: 0.1 to 3.0 GHz
- Low insertion: 0.50 dB @ 2.7 GHz 🧄
- High isolation: 25 dB up to 2.7 GHz
- P0.1dB of 36dBm
- No external DC blocking capacitors required
- Positive low voltage control: VC = 1.6 to 3.00
  V, VDD = 2.5 to 3.0 V

7

VDD

6

GND

5

GND

• Small, LGA (9-pin, 1.15mm x 1.15mm x 0.45mm) package

#### 

Logic and Supply

Figure 1 Functional Block Diagram

V1 V2

VDD

4

ANT

#### Figure 2 Pin-out (Top View)



## **Application Circuit**

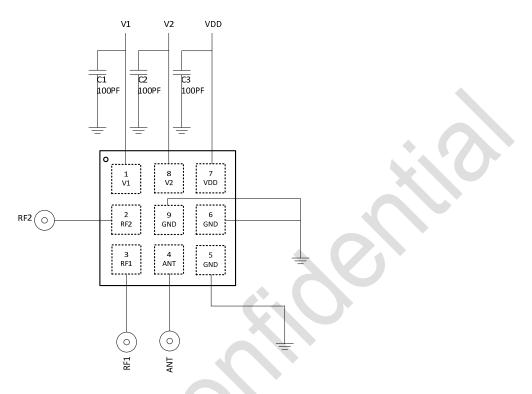


Figure 3 MXD8628 Application Circuit

#### Table 1. Pin Description

Pin No.	Name	Description	Pin No.	Name	Description
1	V1	Control Pin 1	6	GND	Ground
2	RF2	RF-Port 2	7	VDD	Power Supply
3	RF1	RF-Port 1	8	V2	Control Pin 2
4	ANT	Antenna	9	GND	Ground
5	GND	Ground			

#### Truth Table

Table 2.

V1	V2	Active Path
0	0	OFF
1	0	ANT to RF1
1	1	ANT to RF2

**Note:** "1" = 1.0 V to 3.00 V. "0" = 0 V to +0.3 V.

## **Recommended Operation Range**

#### Table 3.

Parameters	Symbol	Min	Тур	Max	Units
Operation Frequency	f1	0.1	-	3.0	GHz
Power supply	V <sub>DD</sub>	2.5	2.8	3.0	V
Switch Control Voltage High	V <sub>CTL_H</sub>	1.6	1.8	3.0	V
Switch Control Voltage Low	V <sub>CTL_L</sub>	0	0	0.3	V



## **Specifications**

#### **Table 4.Electrical Specifications**

Devenuetor	Symbol	Specification		Unite	Test Canditian	
Parameter		Min.	Typical	Max.	Units	Test Condition
DC Specification	S				•	
Control voltage: Low High	V <sub>CTL_L</sub> V <sub>CTL_H</sub>	0 1.60	+1.8	0.3 3.00	V V	
Supply voltage	V <sub>DD</sub>	2.5	2.8	3.0	V	
Supply current	IDD		40	60	uA	VDD = 2.8 V
Control current	Ictl		1		uA	VC= 1.8 V
<b>RF</b> Specification	s		<u> </u>			
Insertion loss	IL		0.30 0.40 0.50	0.40 0.50 0.60	dB dB dB	0.1 to 1.0 GHz 1.0 to 2.2 GHz 2.2 to 3.0 GHz
Isolation	ISO	30 25 20	35 30 25		dB dB dB	0.1 to 1.0 GHz 1.0 to 2.2 GHz 2.2 to 3.0 GHz
Return loss	S11		15		dB	0.1 to 3.0 GHz
3rd Order Input Intercept Point	IIP3	+60	+70		dBm	0.1 to 3.0 GHz, ΔF = 1 MHz, PIN = +20 dBm/tone
Input 0.1 dB compression point	P0.1dB		+36		dBm	0.1 to 3.0 GHz, ANT to RF1 and RF2
2nd harmonic	2fo		+83		dBc	0.1~3GHz, PIN = +26 dBm
3rd harmonic	3fo		+70		dBc	0.1~3GHz, PIN = +26 dBm
Switching on time			2		us	50% VCTL to 10/90% RF
Switching off time			2		us	50% VCTL to 90/10% RF
Startup time			5		us	Shutdown state to any RF switch state

## Absolute Maximum Ratings

#### Table 5. Maximum ratings

Parameters	Symbol	Minimum	Maximum	Units
Supply voltage	V <sub>DD</sub>	+2.5	+3.0	V
Digital control voltage	V <sub>CTL</sub>	0	+3.0	V
RF input power	P <sub>IN</sub>		+36	dBm
Operating temperature	T <sub>OP</sub>	-30	+85	°C
Storage temperature	T <sub>STG</sub>	-55	+150	°C
Electrostatic discharge: Human Body Model (HBM), Class 1C Machine Model (MM), Class A	ESD		1000 100	v v


Note: Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.




#### MXD8628 – 0.1-3.0GHz SP2T Switch

## **Package Outline Dimension**

c

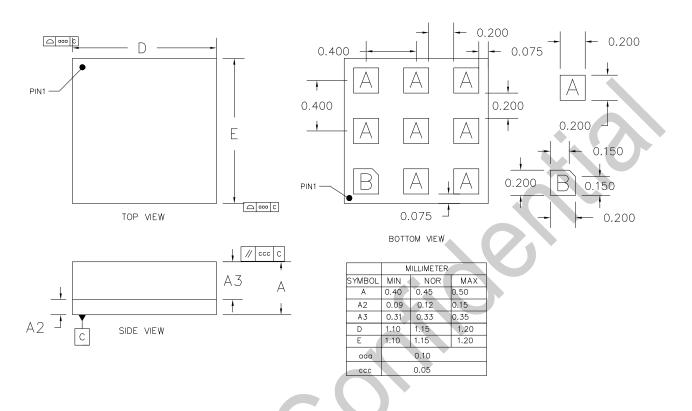





**Reflow Chart** 

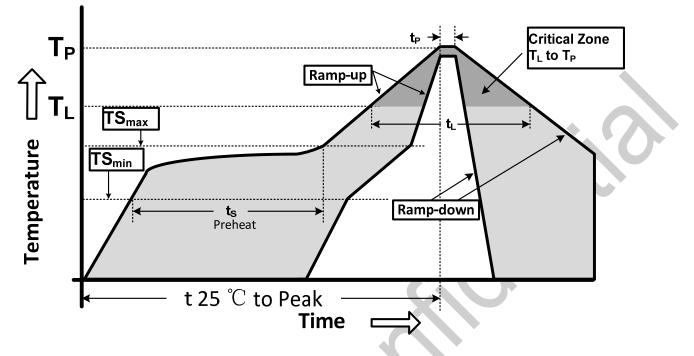


Figure 5. Recommended Lead-Free Reflow Profile

#### Table 6 Reflow condition

Profile Parameter	Lead-Free Assembly, Convection, IR/Convection			
Ramp-up rate $(TS_{max} to T_p)$	3℃/second max.			
Preheat temperature (TS <sub>min</sub> to TS <sub>max</sub> )	150℃ to 200℃			
Preheat time (t <sub>s</sub> )	60 - 180 seconds			
Time above TL , 217 $^\circ C$ (t <sub>L</sub> )	60 - 150 seconds			
Peak temperature (T <sub>p</sub> )	<b>260</b> ℃			
Time within 5 $^\circ C$ of peak temperature(t <sub>P</sub> )	20 - 40 seconds			
Ramp-down rate	6°C/second max.			
Time 25°C to peak temperature	8 minutes max.			

## **ESD Sensitivity**

Integrated circuits are ESD sensitive and can be damaged by static electric charge. Proper ESD protection techniques should be used when handling these devices.

## **RoHS Compliant**

This product does not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) and polybrominated diphenyl ethers (PBDE), and are considered RoHS compliant.