

Specification Status: Released

Electrical Rating

Voltage: 32 V_{DC} MAX
Current: 100 A MAX

Insulating Material:
Cured, Flame Retardant Epoxy Polymer

Lead Material:
18 AWG Tin Plated Copper

Part Marking:

- Manufacturer's Mark and Voltage
- 32 — Part Identification
- EF10 — Part Identification
- Lot Identification (can be on back)

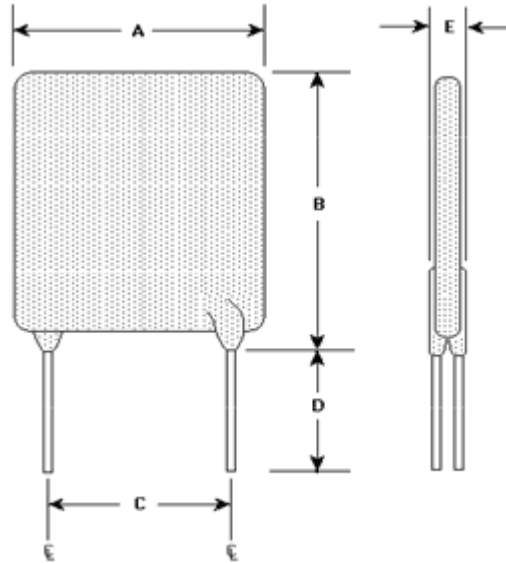


TABLE I. INSTALLATION ENVELOPE DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	23.5	--	27.9	9.4	10.9	7.6	--	--	4.0
in*:	--	(0.93)	--	(1.10)	(0.37)	(0.43)	(0.30)	--	--	(0.16)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	R _a MAX	TRIPPED-STATE POWER DISSIPATION
AMPS AT 25°C HOLD	AMPS AT 25°C HOLD	AMPS AT 25°C TRIP	OHMS AT 25°C		SECONDS AT 25°C, 50 A MAX	OHMS AT 25°C MAX	WATTS AT 25°C TYP
			MIN	MAX			
10.0	10.0	20.0	0.0060	0.0105	15	0.016	7.0

Reference Documents: PS400, PS300 (reference for R₁ MAX)
Precedence: This specification takes precedence over documents referenced herein.
Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free



TABLE III. AUTOMOTIVE SPECIFIC STRESS TESTS AND TEST CONDITIONS:

ELECTRICAL STRESS TESTS	TEST CONDITIONS (see note 2)
ESD Voltage Withstand (see note 1)	25kV
Short Circuit Fault Current Durability	25 cycles, 32V, 200A
Fault Current Durability	350 cycles, 32V/100A
End-of-life Mode Verification	1750 cycles, 32V/100A
Jump Start Endurance (see note 1)	3 cycles, 48V, 2 minute duration
Load Dump Endurance (see note 1)	10 cycles, 86.5V

Note 1: The PolySwitch devices are tested in series with a load resistance and the voltages specified in the test conditions are shared between the PolySwitch device and the load resistance as specified in PS400.

Note 2: Please refer to Appendix A of PS400 for the detailed test procedures