# **ONLY FOR REFERENCE**

# Standard Spec Sheet

Mitsumi Model Name	STO-060A33XC
Mitsumi Model No.	R 667775
Operating Force	3.3N
Pcs/Reel	20,000


This specification is only for reference. If you have any questions for the details, please contact SW engineering division.

For your adopting the products, the formal supply specification will be provided.

# MITSUMI ELECTRIC CO.,LTD.

2-11-2, Tsurumaki, Tama-shi. Tokyo 206-8657 Japan.

SWITCH ENGINEERING SECTION 1049, Tateiwa, Iizuka-shi. Fukuoka 820-8533 Japan.

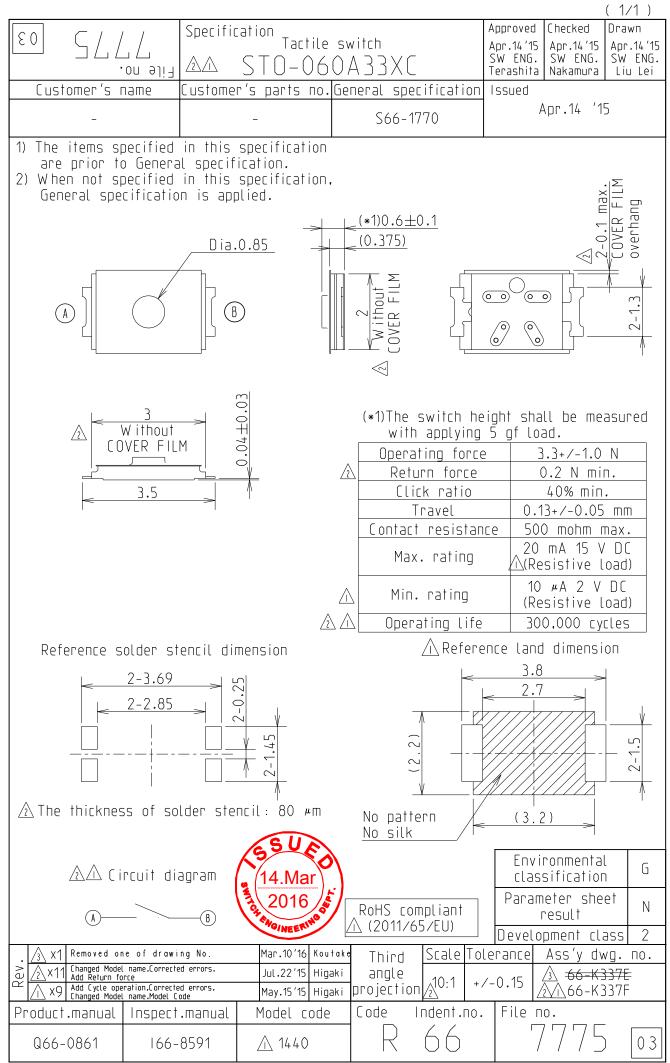

MITSUMI ELECTRIC CO.,LTD.

									(1/9)
				General spec			Approved	Checked	Drawn
	•			Tactile swit	ches		Apr. 22, '15		Jan. 27, '15
	0221				riaa		SW eng. Terashita	SW eng. Nakamura	SW eng. Ayaka. N
				STO se	enes		Released	Jan. 27	
							rtolodood	0011.21	, 2010
	1. (	General							
		1.1. App							
			•	is applied to Tac			SIO series		
		•	rage tempera	0	) to +85 d 5 to +85 d	leg-C (Prodi	ict level)		
			lage tempera	-		leg-C (Tape	,	)	
		1.4. Tes	t conditions			- 5 - ( - 1 -		,	
			•	ure; 5 to 35 deg-C		•			
			•	es from judgement	t, tests ar	nd measurer	nents shall	be conduct	ted
				ng conditions.	+, 65, / 5	0/ DU and		- 96 to 106	kDo
		i el	nperature 204	-/- 2deg-C, humidi	ty 00+/-0	70 INFI, and 6			<b>ΝΓ α.</b>
	2. /	Appeara	ance and Con	struction					
		•••		ecified on Produc	t specifica	ations.			
		2.2. Mat		fer to Table-1.					
		2.3. App		ere shall be no de		•			
				e products such as TUATOR, and co			discoloratio	on, air dubd	le of
		2.4. Cro	oss section vi	•	manninau	011.			
							(1)	ACTUATO	DR
							(2)	COVER F	
				ALLIN -	1		(3)		PRING
				<u> </u>			(4)	BASE TERMINA	1
			∠_ <sup>l</sup> K==	<del></del>			(5)		۱L
			Fig	<ol> <li>1: Cross section</li> </ol>	of produ	ct			
				Tabla	4				
		Co	mponents	Table- Materia			Note		
			TUATOR	9T Nylon					
		· /	VER FILM	9T Nylon					
		· · /	ICK SPRING	Stainless steel		Ag plated			
		(4) BA		9T Nylon					
		(5) TE	RMINAL	Phosphor bronze	•	Ag plated			
	3 1	Rating							
	0.1	•	ed on Produc	t specification.					
		•							
								SUA	
								2	
							2	11.Nov)	
							IT OF	2016	/
							X.	WO/NEERING	,
								$\smile$	
<u> </u>		р т				ode Divisio	n File N	2	
uc								0.	
Revision								770	$\wedge$
Re	∆5 <b>×</b> 1	Nov.07.'16	Change the bar co	de label to QR code labe	Y.Nakashima	S 66	) 1	770	05
	∆4 <b>×</b> 1	Jul.31.'15	Change design		Kajiya				

4. Electric Ch		
	Test conditions	Criteria
4.1. Contact resistance	Measurements shall be made under the conditions shown in Fig. 3. 1) Load: 2 times of the specified standard operating force. 2) Measurement conditions: Contact resistance meter at 20 mV Max. and 10uA to 10mA.	Specified on Product specifications.
	2.5 mm dia. Push direction 0.5 mm Max. Tilt angle 90+/-2 deg Flat tip R0.3 Perimeter (Material: Stainless steel) Fig. 2: Push rod Fig. 3: Measurement conditions	
4.2. Insulation resistance	<ul> <li>Measurements shall be made under the following conditions.</li> <li>1) Applied voltage: 100 V, DC</li> <li>2) Duration: 1 min.</li> <li>3) Applied position: Between terminals.</li> </ul>	50 M-ohm Min.
4.3. Withstanding voltage	<ul> <li>Measurements shall be made under the following conditions.</li> <li>1) Applied voltage: 100 V, AC (50/60 Hz)</li> <li>2) Duration: 1 min.</li> <li>3) Leak current: 2 mA</li> <li>4) Applied position: Between terminals.</li> </ul>	There shall be no damage and breakdown.
4.4. Bounce	Measurements shall be made under the conditions shown in Fig. 3. Bounce time at "ON" and "OFF" shall be measured under the following conditions. 1) Circuit: Refer to Fig. 4. 2) Load: 1.5 times of the specified standard operating force. 3) Frequency of operation: 3 to 4 times/sec. DC5 V5 k-ohmOscilloscope Fig. 4: Circuit "ON"	ON bounce: 10 ms Max. OFF bounce: 10 ms Max.
	"OFF" "ON bounce" "OFF bounce" Fig. 5: Bounce	File number 1770

S-0115

Item	Test conditions	Criteria
5.1. Operating	Measurements shall be made under the conditions shown in Fig. 3 just after striking 10 times lightly.	Specified on Product
force	<ol> <li>Measurement speed: 0.5 mm/sec.</li> <li>Limit load to apply: 1.5 to 2 times of the specified</li> </ol>	specifications.
5.2.	standard operating force.	
Return force	Force (N) Operating force	
	Return force	
	Fig. 6: Force-Stroke curve	
5.3. Click ratio	Refer to 5.1 and 5.2 for the measurement conditions. Click ratio = $(a - b) / a \times 100\%$	Specified on Product specifications.
5.4.	Force (N)	
Travel	$i = \frac{1}{1 + 1}$ $i = \frac{1}{1$	
5.5.	Measurements shall be made under the conditions shown in	There shall be
Stopper strength	Fig. 3 and at returned condition. Load: 50 N Duration: 15 sec.	no electrical and mechanical abnormality.
5.6. Shear	Measurements shall be made just after applying static load under the following conditions.	-
strength	1) Load: 3 N	
	2) Duration: 15 sec.	
	Test shall be made after two times of reflow soldering.	
	Fig. 8: Shear strength test	SSUED
		11.Nov 2016
		File number
		1770
	MITSUMI ELECTRIC. CO., LTD.	S-01

(3/9)

Item	Test conditions	Criteria
5.7. Vibration resistance	<ul> <li>Measurements shall be made after testing under the following conditions.</li> <li>1) Vibration frequency range: 10 to 55 Hz</li> <li>2) Amplitude: 1.5 mm (peak-to-peak)</li> <li>3) Sweep ratio: 10-55-10 Hz in approx. 1 min.</li> <li>4) Frequency sweep mode: Logarithmic or Liner sweep</li> <li>5) Direction of vibration: 3 orthogonal directions including the direction of operation.</li> <li>6) Duration: 2 hr each (6 hr in total)</li> </ul>	There shall be no electrical and mechanical abnormality.
5.8. Impact resistance	Measurements shall be made after testing under the following conditions. 1) Acieration: 735 m/s <sup>2</sup> 2) Duration: 6 msec 3) Test direction: 6 directions 4) Number of test: 3 times per direction (18 times in total)	There shall be no electrical and mechanical abnormality.
5.9. Solderability	<ul> <li>Measurements shall be made under the following conditions.</li> <li>1) Solder temperature: 230 +/- 5 dig-C</li> <li>2) Dipping time: 3 +/- 0.5 sec.</li> <li>3) Composition of solder: Sn-3.0Ag-0.5Cu</li> <li>4) Soldering flux: Rosin 25%, Alcohol 75%</li> </ul>	More than 75% of dipped part shall be covered with solder.
5.10. Soldering heat resistance	Measurements shall be made after reflow soldering under the following conditions. 1) Heating method: Far-infrared radiation heating 2) Temperature profile: As shown in below. 3) Allowable soldering process: 2 times Max. Temp. (deg-C) 260 230 180 150 90+/-30 sec	There shall be no abnormality such as marked looseness, drop-off, and assured 4. Electrical Characteristics. Operating force: Item 5.1.
	0 Fig. 9: Reflow soldering profile	2016

## 5.11. Precautions for soldering

- 1) This product is designed for reflow soldering. Please do not solder manually.
- 2) Do not wash the product with solvent or the like.
- 3) The soldering conditions will be different depending on reflow soldering machines. Conditions of soldering shall be confirmed under actual production conditions.
- 4) Reflow soldering shall be performed in shorter time and at lower temperature. Otherwise click ratio may be decreased.
- 5) Please set the proper volume of solder in order to prevent soldering flux ingress and float of the products.
- 6) Please do not apply soldering flux to the terminals and mounting surface of PWB/FPC.
- 7) Note that if the load is applied to the terminals during soldering it might cause deformation and defects in electrical performance.

(4/9)

6. Durability		
Item	Test conditions	Criteria
6.1.	Measurements shall be made after testing under the	Contact
Operating life	following conditions.	resistance:
	<ol> <li>Electrical load: Rated load or no load.</li> </ol>	20 ohm Max.
	<ol><li>Rate of operation: 2 cycles/sec.</li></ol>	
	3) Depression: The maximum value of specified operating	Insulation
	force.	resistance:
	<ol> <li>Cycles of operation: Specified on the product specification.</li> </ol>	10 M-ohm Min.
		Withstanding voltage: Item 4.3.
		nem 4.3.
		Bounce (ON/OFF): 20 msec Max.
		Operating force: Within +/-30% of specified initial value.
		Travel: Item 5.4.

#### 7. Environmental

7. Environme		-
Item	Test conditions	Criteria
7.1.	Following the test set forth below the sample shall be left in	Contact
Humidity	normal temperature and humidity conditions for 1 hr before	resistance:
resistance	measurements are made.	1 ohm Max.
	Water drops shall be removed.	
	1) Temperature: 65+/-2 deg-C, Humidity: 90 to 96% RH	Insulation
	2) Duration: 96+/-5 hr	resistance:
		10 M-ohm Min.
7.2.	Following the test set forth below the sample shall be left in	
Heat	normal temperature and humidity conditions for 1 hr before	Withstanding
resistance	measurements are made.	voltage:
	1) Temperature: 85+/-3 deg-C	Item 4.3.
	2) Duration: 96+/-5 hr	
		Bounce
7.3.	Following the test set forth below the sample shall be left in	(ON/OFF):
Cold resistance	normal temperature and humidity conditions for 1 hr before measurements are made.	20 msec Max.
resistance		Operating force:
	Water drops shall be removed.	Operating force: Within +/-30%
	<ol> <li>Temperature: -40+/-3 deg-C</li> <li>Duration: 96+/-5 hr</li> </ol>	of specified
	2) Duration. 90+/-3 m	initial value.
	GSUE	Travel:
		Item 5.4.
		n.cm 3. <del>4</del> .
	2016/	
	ANO/NEERING	File number
		1770

Item	Test conditions	Criteria
7.4.	Following continuous 5 cycles of the temperature cycling test set forth below, the sample shall be left in normal temaperature and humidity conditions for 1hr before measurements are made. 85+/-2 deg- -40+/-3 deg- 120 min 10 to 15 min 10 to 15 min 1 cycle Fig. 10: Temperature cycling test conditions	Contact resistance: 1 ohm Max. Insulation resistance: 10 M-ohm Min. Withstanding voltage: Item 4.3. Bounce (ON/OFF): 20 msec Max. Operating force: Within +/-30% of specified initial value. Travel: Item 5.4.
7.5. Water resistance	Ingess shall be confimed after the test under the following conditions based on IPX7. 1) Depth of immersion: 1 m 2) Duration of immersion: 30 min.	There shall be no ingress inside of the product.

# 8. Use Condition

- 8.1. Operating temperature range: Refer to the item 1.2. (Temperature range which the product is ON and OFF electrically.) There shall be no freezing and condensation.
- 8.2. Using environment
  - 1) Do not expose the products to corrosive gas such as sulfur gas and salty wind.
  - 2) Visible dust must be cleared.
  - 3) Please do not apply excessive load to the products to avoid deformation and deterioration.

# 9. Storage Condition

9.1. Storage temperature range: Refer to the item 1.3. There shall be no freezing and condensation.

## 9.2. Environment

- 1) Do not expose the products to corrosive gas such as sulfur gas, and salty wind.
- 2) Visible dust must be cleared.
- 3) Please do not apply excessive load to the products to avoid deformation and deterioration.



File number

177

(6/9)

- 9.3. Storage method
  - 1) Products shall be packed in an airtight plastic bag and stored in cool place avoiding direct sunshine.
  - 2) Do not stack too many switches for strafe. Shall be free from high temperature and high humidity.
  - 3) Do not store the products in the state of applying load on it's operation area.
  - 4) Products should be used within six months after the date of delivery.
- 10. Precautions in Use
- 10.1. Do not clean the products with a solvent or the like.
- 10.2. Do not use the products with beyond the rated current and voltage.
- 10.3. Do not apply excessive load to the terminals and the operating part.
- 10.4. Larger static load than specified and/or shock shall not be applied to the operating part.
- 10.5. After mounting the products on PWB/FPC, please do not stack too many PWB/FPC in order to avoid excessive load to the switch mounted area.
- 10.6. The dimensions of a pattern on PWB/FPC shall refer to the recommended dimensions in Product specifications.
- 10.7. If you use this product in one of the following environmental conditions, progress of sulfaration and oxidization on the contact part (silver) will be accelerated, which may cause contact failure.

Therefore, be careful about the operation environment.

- 1) Around a sulfarate hot spring where sulfide gas is generated.
- 2) In case this product is always used in a place where exhaust gas from automobiles exist.
- 10.8. Do not push the cover film of products with something sharp.
- 10.9. Please design and assemble your unit not to apply over load to the switch.
- 10.10. Please let us know beforehand if you use other shape of pushing rod than the shape described in Fig. 2.
- 10.11. Please be careful on designing and handling especially when the switch is being built into the unit, not to add side force (static or impact) to the ACTUATOR as shown below (Fig. 11), because the ACTUATOR might deform or come off.





Fig. 11 Load and impact from side direction

- 10.12. Unless provided for otherwise, the products have been designed and manufactured for application in equipment and devices which are sold to end users in the market, including audio-visual equipment, electrical home appliances, office machines, information and communication equipment, and amusement equipment. The products are not intended for use in, and must not be used for, any application for nuclear equipment, driving equipment for aerospace or any other unauthorized use. With the exception of the abovementioned prohibited applications, please contact us (MITSUMI) and/or evaluate the total system regarding applicability for applications involving high levels of safety and liability such as medical equipment. Please also incorporate fail-safe design, protection and redundant circuitry, malfunction protection, and/or fire protection into the complete system to ensure safety and reliability of the total system.
- 10.13. If you intend to use the products for automotive, please let us know beforehand.




File number


- 11. Packing Specification
- 11.1. Dimensions of carrier tape are as shown below.
- 11.2. Taping rule
  - 1) Tape winding direction is in clockwise.
  - (When pulling the tape toward, feeding holes should be located on the right side.) 2) Feeding holes shall not be covered with the cover tape.
  - The cover tape shall not be run off the edge of the carrier tape.
  - 3) 160 mm or more from the end of trailer tape part shall be empty.
  - 4) The leader part shall be 400 mm or more and it should include 100 mm of empty part. The leader part shall have 20 to 30 mm of un-sealed cover tape.
  - 5) The top tape of the leader part shall be stuck on the side of the reel by 30 to 50 mm using adhesive tape.
  - 6) Peeling strength of cover tape from carrier tape is 0.1 to 1.3 N at 165 to 180 deg.
  - 7) Bar-code label and Mitsumi label shall be stuck on the side of the reel.
  - 8) The products shall free drop from the reversed carrier tape without cover tape after pressing at 0.1 to 0.2 N force.
  - 9) Continuous two missing switches shall not be allowed. Total number of missing switches shall be 0.1% or less of the packed quantity per reel.
  - 10) The direction of products in the pockets is not specified.
  - 11) 20,000 switches shall be packed in a reel.

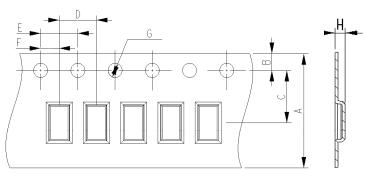

Α	В	С	D	E	F	G	Н
12	1.75	5.5	4+/-0.1	4+/-0.1	2	1.5 dia +0.1/-0	1
Fig. 12 Carrier tape dimensions							

12 Camer tape dimensions

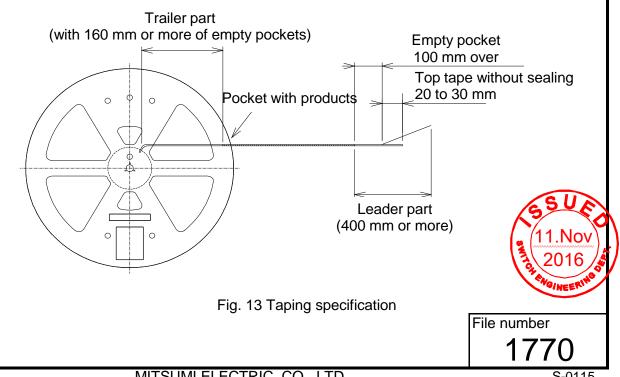

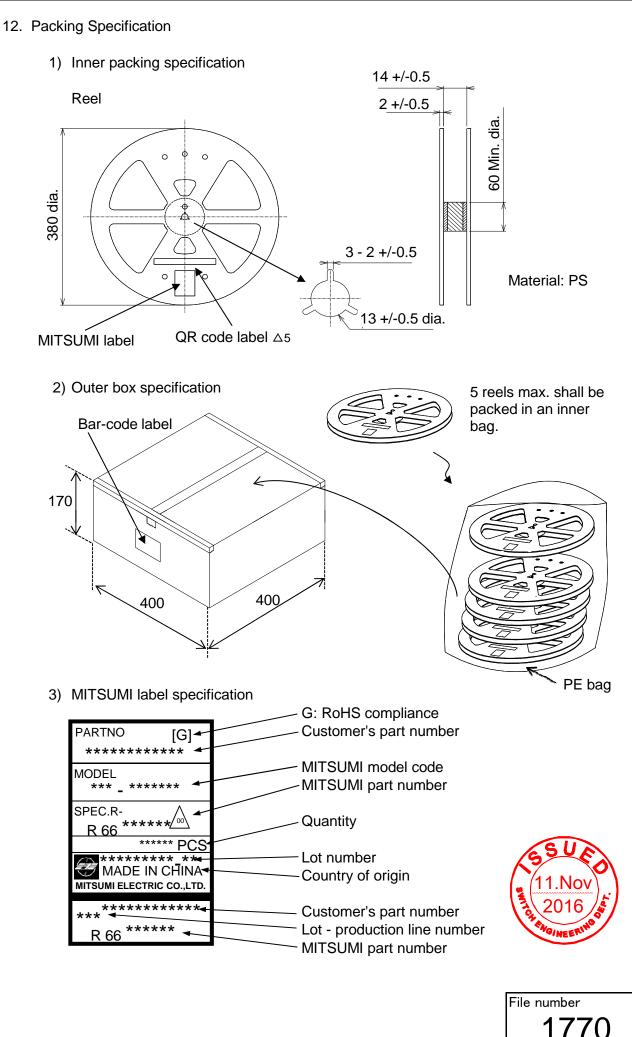

S-0115

(9/9)