

- Operation from Very Slow Edges
- Improved Line-Receiving Characteristics
- High Noise Immunity


**description**

Each circuit functions as a 2-input NAND gate, but because of the Schmitt action, it has different input threshold levels for positive ( $V_{T+}$ ) and for negative going ( $V_{T-}$ ) signals.


These circuits are temperature-compensated and can be triggered from the slowest of input ramps and still give clear, jitter-free output signals.

XD74LS132 are characterized for operation from 0°C to 70°C.


**XD74LS132**






**logic diagram (positive logic)**



**logic symbol†**

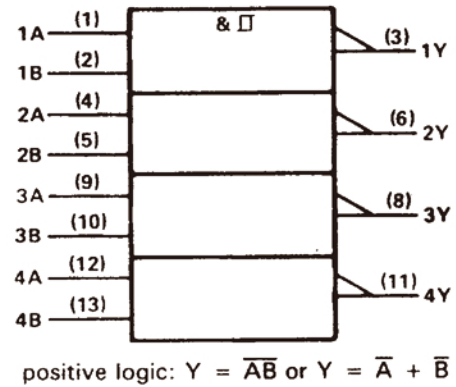

schematics

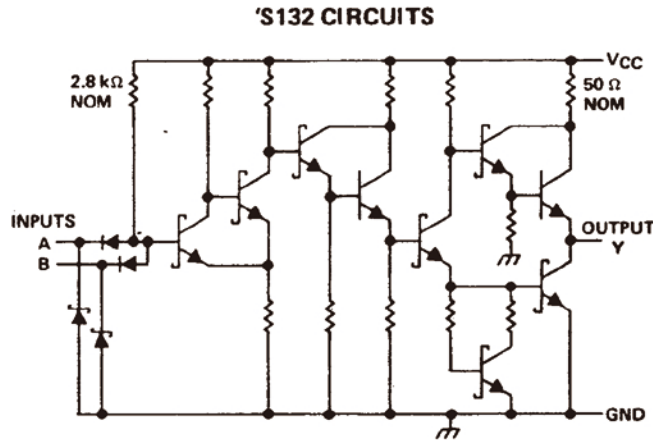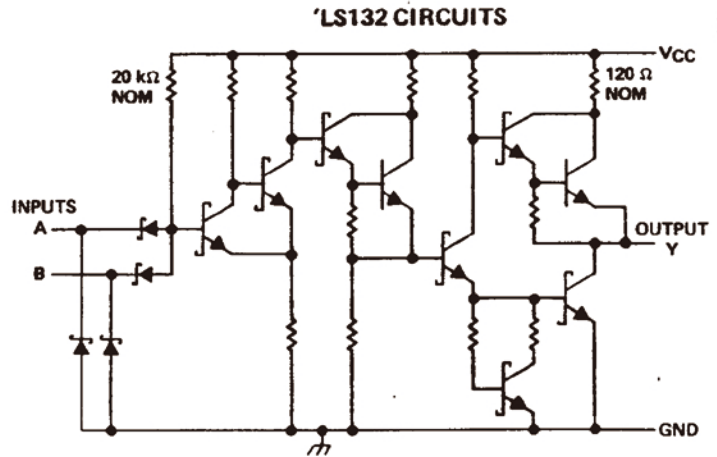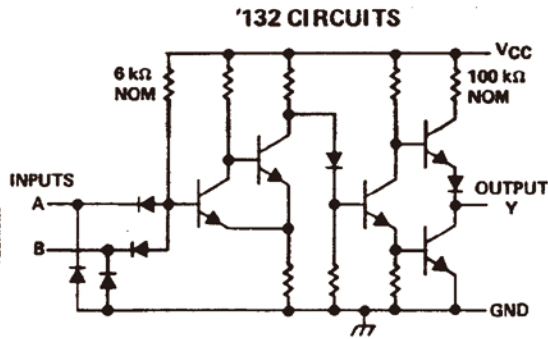

Resistor values shown are nominal.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, $V_{CC}$ (see Note 1).....	7 V
Input voltage: '132, 'S132.....	5.5 V
'LS132.....	7 V
SN74'.....	0°C to 70°C
Storage temperature range.....	-65°C to 150°C

NOTE 1: Voltages values are with respect to network ground terminal.

### recommended operating conditions

	XD74LS132			UNIT
	MIN	NOM	MAX	
$V_{CC}$ Supply voltage	4.75	5	5.25	V
$I_{OH}$ High-level output current			-0.8	mA
$I_{OL}$ Low-level output current			16	mA
$T_A$ Operating free-air temperature	0		70	°C

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	MIN	TYP‡	MAX	UNIT
$V_{T+}$	$V_{CC} = 5\text{ V}$	1.5	1.7	2	V
$V_{T-}$	$V_{CC} = 5\text{ V}$	0.6	0.9	1.1	V
$V_{hys}$ ( $V_{T+} - V_{T-}$ )	$V_{CC} = 5\text{ V}$	0.4	0.8		V
$V_{IK}$	$V_{CC} = \text{MIN}, I_I = -12\text{ mA}$			-1.5	V
$V_{OH}$	$V_{CC} = \text{MIN}, V_I = 0.6\text{ V}, I_{OH} = -0.8\text{ mA}$	2.4	3.4		V
$V_{OL}$	$V_{CC} = \text{MIN}, V_I = 2\text{ V}, I_{OL} = 16\text{ mA}$		0.2	0.4	V
$I_{T+}$	$V_{CC} = 5\text{ V}, V_I = V_{T+}$	-0.43			mA
$I_{T-}$	$V_{CC} = 5\text{ V}, V_I = V_{T-}$	-0.56			mA
$I_I$	$V_{CC} = \text{MAX}, V_I = 5.5\text{ V}$			1	mA
$I_{IH}$	$V_{CC} = \text{MAX}, V_I = 2.4\text{ V}$			40	μA
$I_{IL}$	$V_{CC} = \text{MAX}, V_{IL} = 0.4\text{ V}$	-0.8		-1.2	mA
$I_{OS}§$	$V_{CC} = \text{MAX}$	-18		-55	mA
$I_{CCH}$	$V_{CC} = \text{MAX}$		15	24	mA
$I_{CCL}$	$V_{CC} = \text{MAX}$		26	40	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at  $V_{CC} = 5\text{ V}, T_A = 25^\circ\text{C}$ .

§ Not more than one output should be shorted at a time.

### switching characteristics, $V_{CC} = 5\text{ V}, T_A = 25^\circ\text{C}$ (see figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PLH}$	Any	Y	$R_L = 400\ \Omega, C_L = 15\text{ pF}$		15	22	ns
$t_{PHL}$					15	22	ns

### recommended operating conditions

	XD74LS132			UNIT
	MIN	NOM	MAX	
V <sub>CC</sub> Supply voltage	4.75	5	5.25	V
I <sub>OH</sub> High-level output current			-0.4	mA
I <sub>OL</sub> Low-level output current			8	mA
T <sub>A</sub> Operating free-air temperature	0		70	°C

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	XD74LS132			UNIT
		MIN	TYP‡	MAX	
V <sub>T+</sub>	V <sub>CC</sub> = 5 V	1.4	1.6	1.9	V
V <sub>T-</sub>	V <sub>CC</sub> = 5 V	0.5	0.8	1	V
V <sub>hys</sub> (V <sub>T+</sub> - V <sub>T-</sub> )	V <sub>CC</sub> = 5 V	0.4	0.8		V
V <sub>IK</sub>	V <sub>CC</sub> = MIN, I <sub>I</sub> = -18 mA			-1.5	V
V <sub>OH</sub>	V <sub>CC</sub> = MIN, V <sub>I</sub> = 0.5 V, I <sub>OH</sub> = -0.4 mA	2.7	3.4		V
V <sub>OL</sub>	V <sub>CC</sub> = MIN, V <sub>I</sub> = 1.9 V	I <sub>OL</sub> = 4 mA	0.25	0.4	V
		I <sub>OL</sub> = 8 mA	0.35	0.5	
I <sub>T+</sub>	V <sub>CC</sub> = 5 V, V <sub>I</sub> = V <sub>T+</sub>	-0.14			mA
I <sub>T-</sub>	V <sub>CC</sub> = 5 V, V <sub>I</sub> = V <sub>T-</sub>	-0.18			mA
I <sub>I</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 7 V			0.1	mA
I <sub>IH</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 2.7 V			20	μA
I <sub>IL</sub>	V <sub>CC</sub> = MAX, V <sub>IL</sub> = 0.4 V			-0.4	mA
I <sub>OS</sub> §	V <sub>CC</sub> = MAX	-20		-100	mA
I <sub>CCH</sub>	V <sub>CC</sub> = MAX		5.9	11	mA
I <sub>CCL</sub>	V <sub>CC</sub> = MAX		8.2	14	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

§ Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second

### switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C (see figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>PLH</sub>	Any	Y	R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 15 pF		15	22	ns
t <sub>PHL</sub>					15	22	ns

**recommended operating conditions**

	XD74LS132			UNIT
	MIN	NOM	MAX	
V <sub>CC</sub> Supply voltage	4.75	5	5.25	V
I <sub>OH</sub> High-level output current			-1	mA
I <sub>OL</sub> Low-level output current			20	mA
T <sub>A</sub> Operating free-air temperature	0		70	°C

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER	TEST CONDITIONS†	XD74LS132			UNIT
		MIN	TYP‡	MAX	
V <sub>T+</sub>	V <sub>CC</sub> = 5 V	1.6	1.77	1.9	V
V <sub>T-</sub>	V <sub>CC</sub> = 5 V	1.1	1.22	1.4	V
V <sub>hys</sub> (V <sub>T+</sub> - V <sub>T-</sub> )	V <sub>CC</sub> = 5 V	0.2	0.55		V
V <sub>IK</sub>	V <sub>CC</sub> = MIN, I <sub>I</sub> = -18 mA			-1.2	V
V <sub>OH</sub>	V <sub>CC</sub> = MIN, V <sub>I</sub> = 1.1 V, I <sub>OH</sub> = -1 mA	2.7	3.4		V
V <sub>OL</sub>	V <sub>CC</sub> = MIN, V <sub>I</sub> = 1.9 V, I <sub>OL</sub> = 20 mA			0.5	V
I <sub>T+</sub>	V <sub>CC</sub> = 5 V, V <sub>I</sub> = V <sub>T+</sub>		-0.9		mA
I <sub>T-</sub>	V <sub>CC</sub> = 5 V, V <sub>I</sub> = V <sub>T-</sub>		-1.1		mA
I <sub>I</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 5.5 V			1	mA
I <sub>IH</sub>	V <sub>CC</sub> = MAX, V <sub>I</sub> = 2.7 V			50	μA
I <sub>IL</sub>	V <sub>CC</sub> = MAX, V <sub>IL</sub> = 0.5 V			-2	mA
I <sub>OS</sub> §	V <sub>CC</sub> = MAX	-40		-100	mA
I <sub>CCH</sub>	V <sub>CC</sub> = MAX		28	44	mA
I <sub>CCL</sub>	V <sub>CC</sub> = MAX		44	68	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.


‡ All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

§ Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

**switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C (see figure 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>PLH</sub>	A or B	Y	R <sub>L</sub> = 280 Ω, C <sub>L</sub> = 15 pF		7	10.5	ns
t <sub>PHL</sub>					8.5	13	ns

**PARAMETER MEASUREMENT INFORMATION**

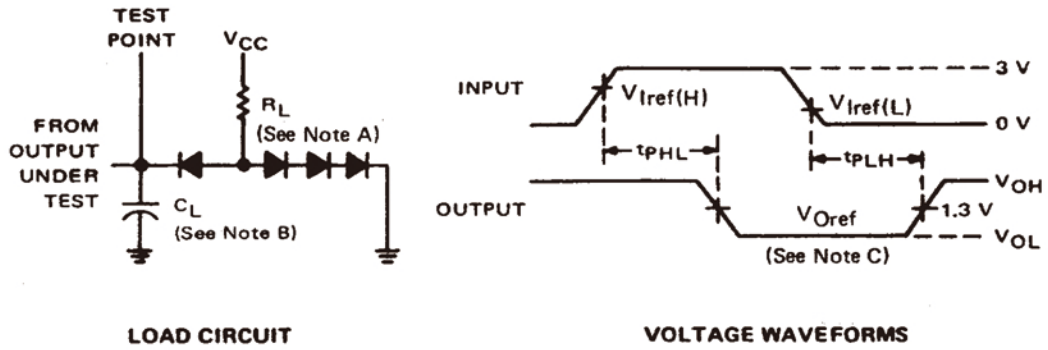


- NOTES: A. All diodes are 1N3064 or equivalent.  
 B.  $C_L$  includes probe and jig capacitance.  
 C. Generator characteristics and reference voltages are:

	Generator Characteristics				Reference Voltages		
	$Z_{out}$	PRR	$t_r$	$t_f$	$V_{I\ ref(H)}$	$V_{I\ ref(L)}$	$V_{O\ ref}$
<b>XD74LS132</b>	50	1 MHz	10 ns	10 ns	1.7 V	0.9 V	1.5 V
<b>XD74LS132</b>	50	1 MHz	15 ns	6 ns	1.6 V	0.8 V	1.3 V
'S132	50	1 MHz	2.5 ns	2.5 ns	1.8 V	1.2 V	1.5 V


FIGURE 1

TYPICAL CHARACTERISTICS OF '132 CIRCUITS


POSITIVE-GOING THRESHOLD VOLTAGE  
vs  
FREE-AIR TEMPERATURE

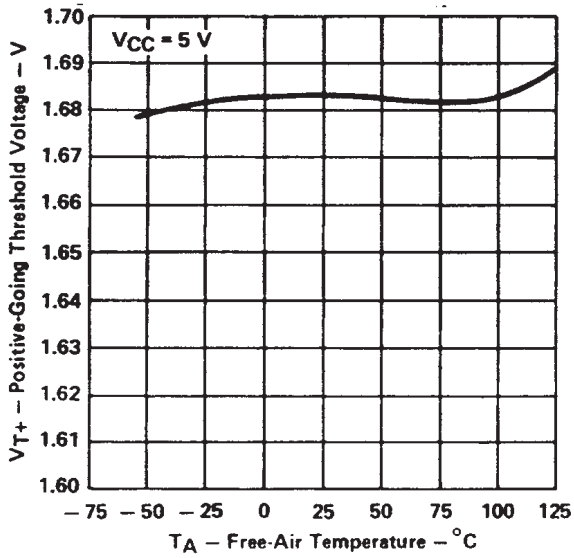


NEGATIVE-GOING THRESHOLD VOLTAGE  
vs  
FREE-AIR TEMPERATURE

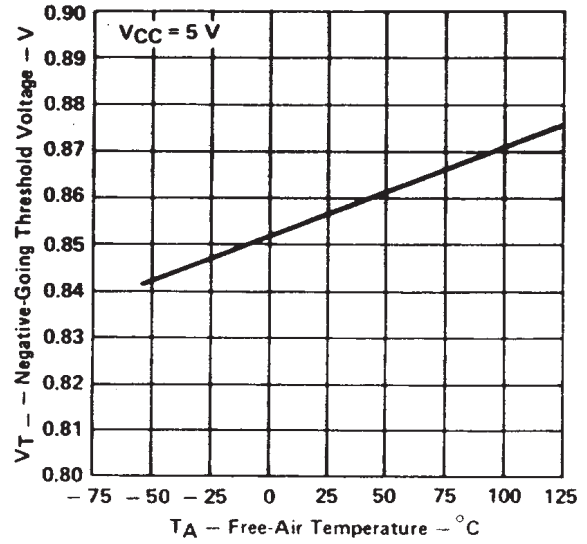




HYSTERESIS  
vs  
FREE-AIR TEMPERATURE

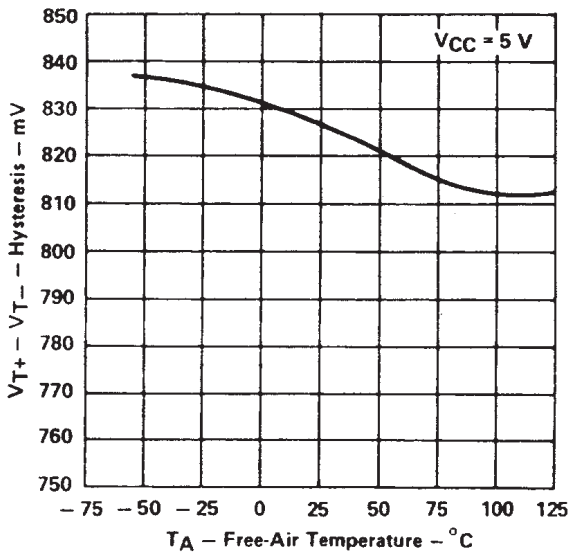

DISTRIBUTION OF UNITS  
FOR HYSTERESIS

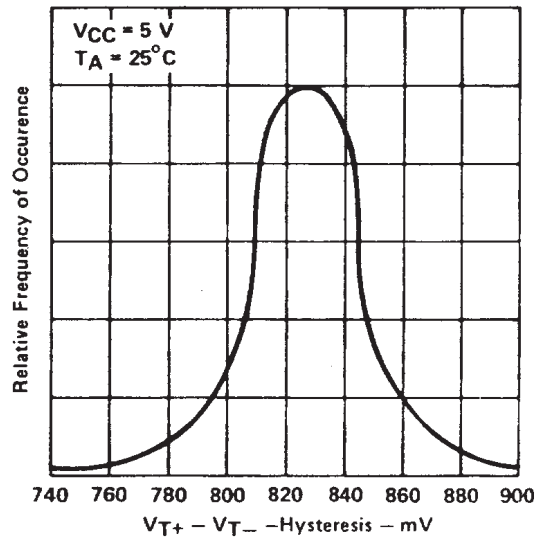

TYPICAL CHARACTERISTICS OF '132 CIRCUITS

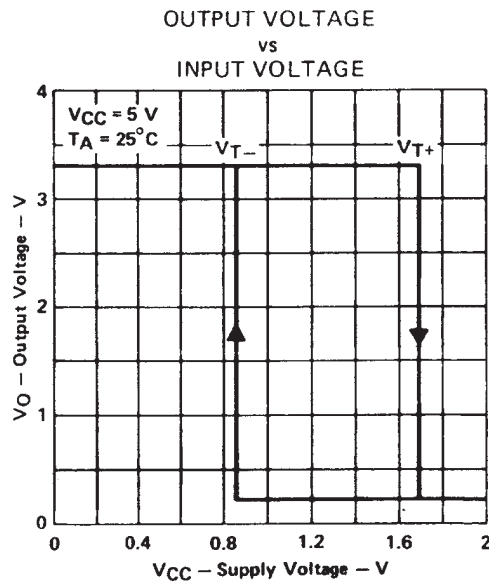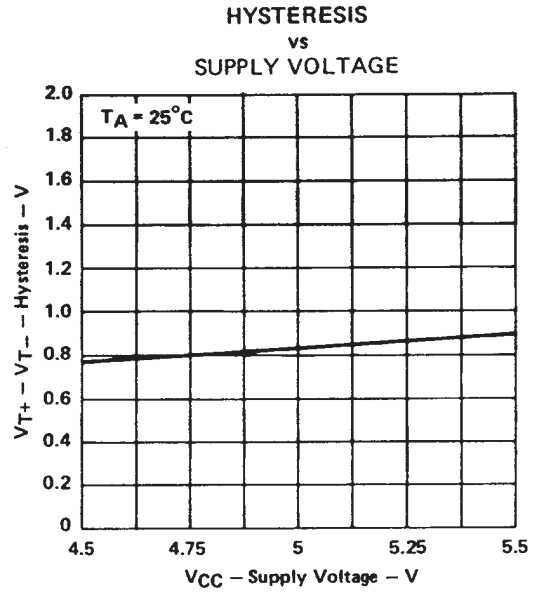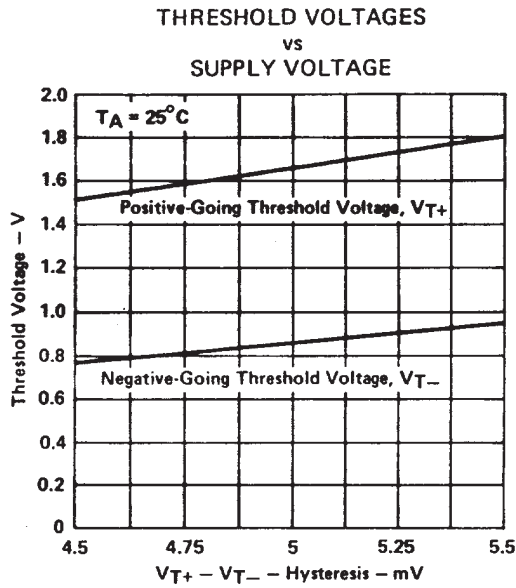


† Data for temperatures below 0°C and 70°C and supply below 4.75 V and above 5.25 V are applicable for SN54132 only.




## TYPICAL CHARACTERISTICS OF 'LS132 CIRCUITS


POSITIVE-GOING THRESHOLD VOLTAGE  
vs  
FREE-AIR TEMPERATURE

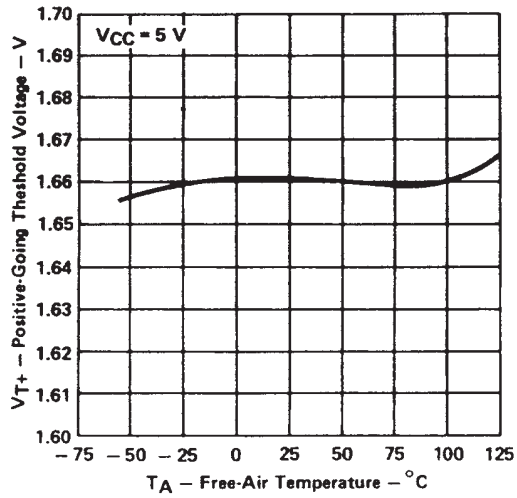


NEGATIVE-GOING THRESHOLD VOLTAGE  
vs  
FREE-AIR TEMPERATURE

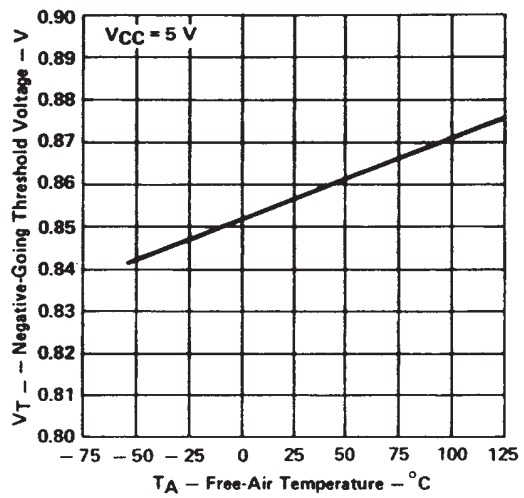

HYSTERESIS  
vs  
FREE-AIR TEMPERATURE

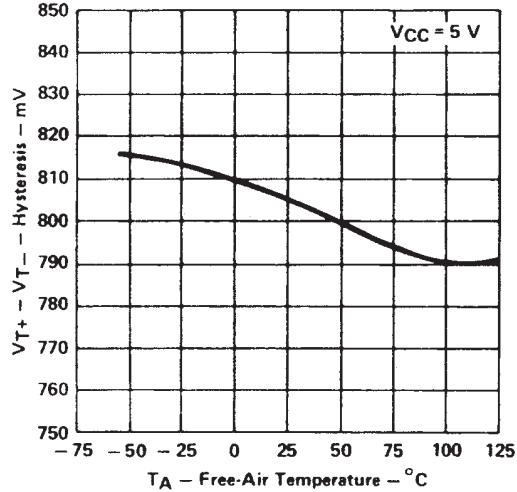


DISTRIBUTION OF UNITS  
FOR HYSTERESIS

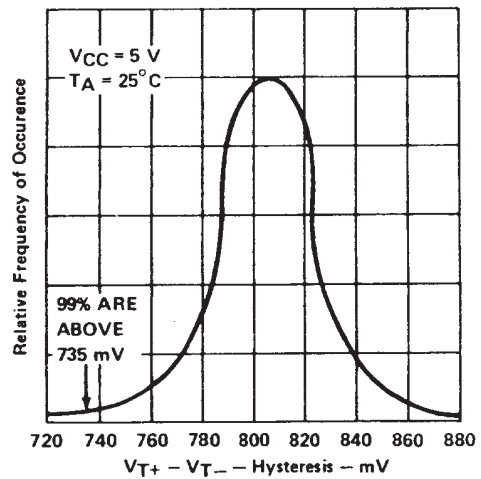


Data for temperatures below 0°C and above 70°C and supply voltages below 4.75 V and above 5.25 V are applicable for SN54LS132 only.

## TYPICAL CHARACTERISTICS OF 'LS132 CIRCUITS

THRESHOLD VOLTAGES AND HYSTERESIS  
vs  
SUPPLY VOLTAGE






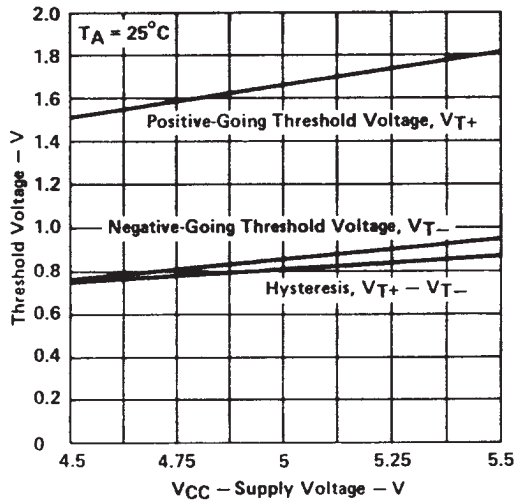



OUTPUT VOLTAGE  
vs  
INPUT VOLTAGE

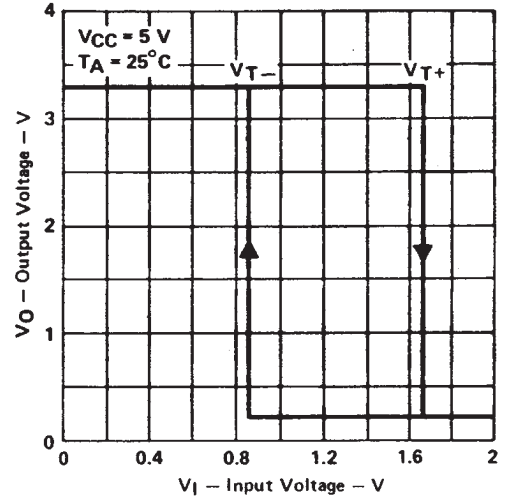

† Data for temperatures below 0°C and above 70°C and supply voltages below 4.75 V and above 5.25 V are applicable for SN54LS132 only.

TYPICAL APPLICATION DATA

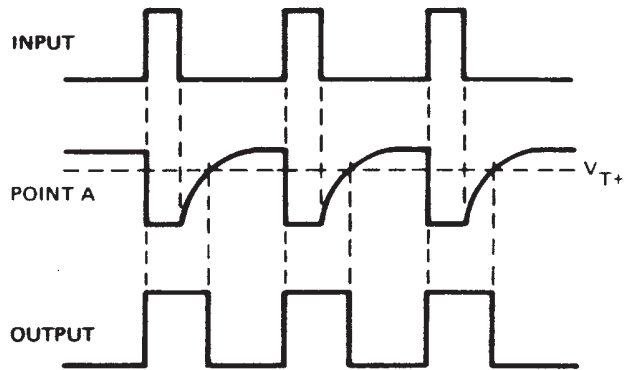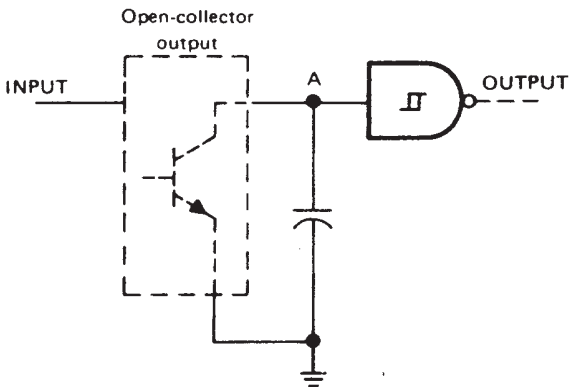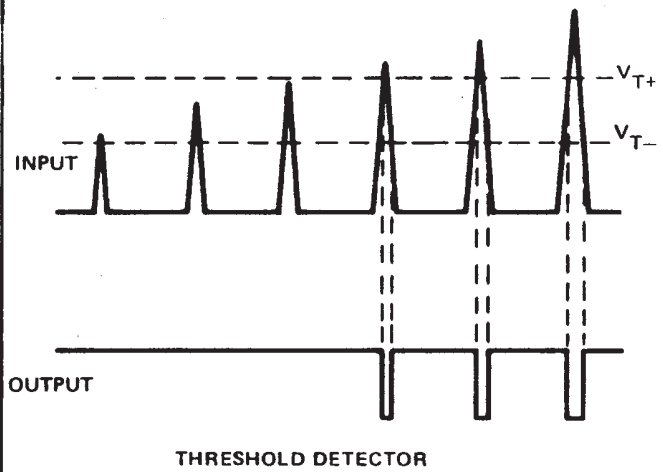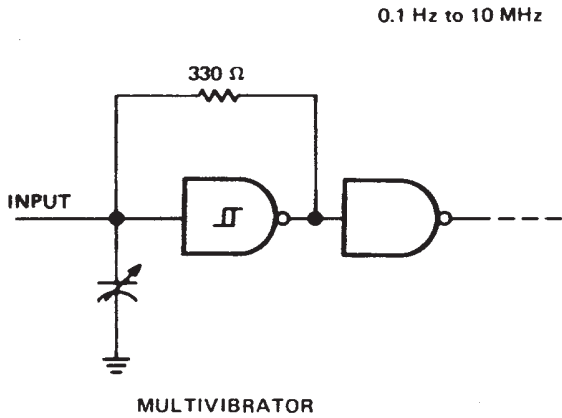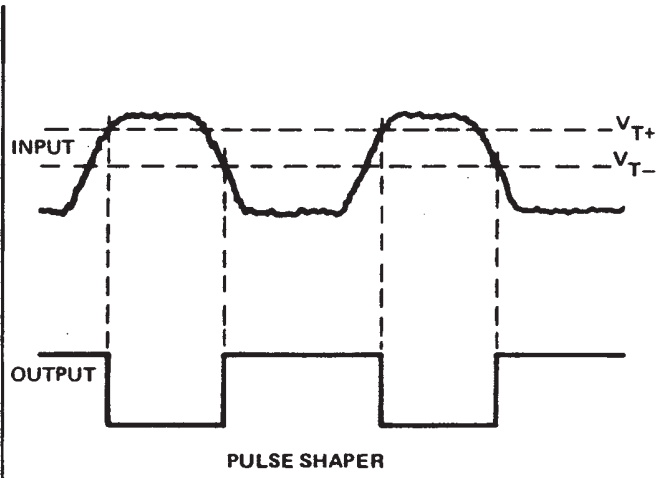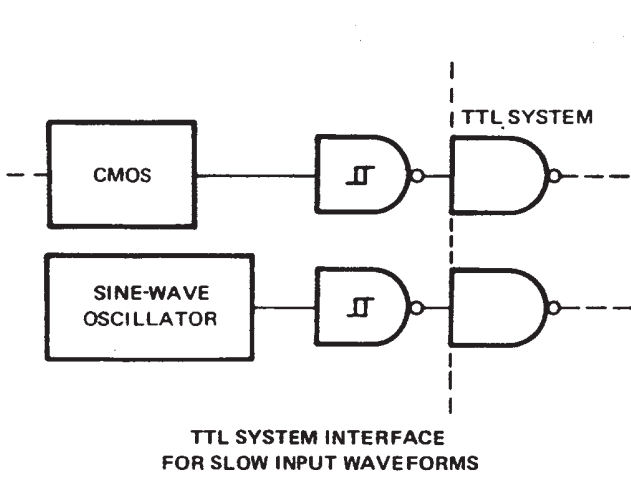

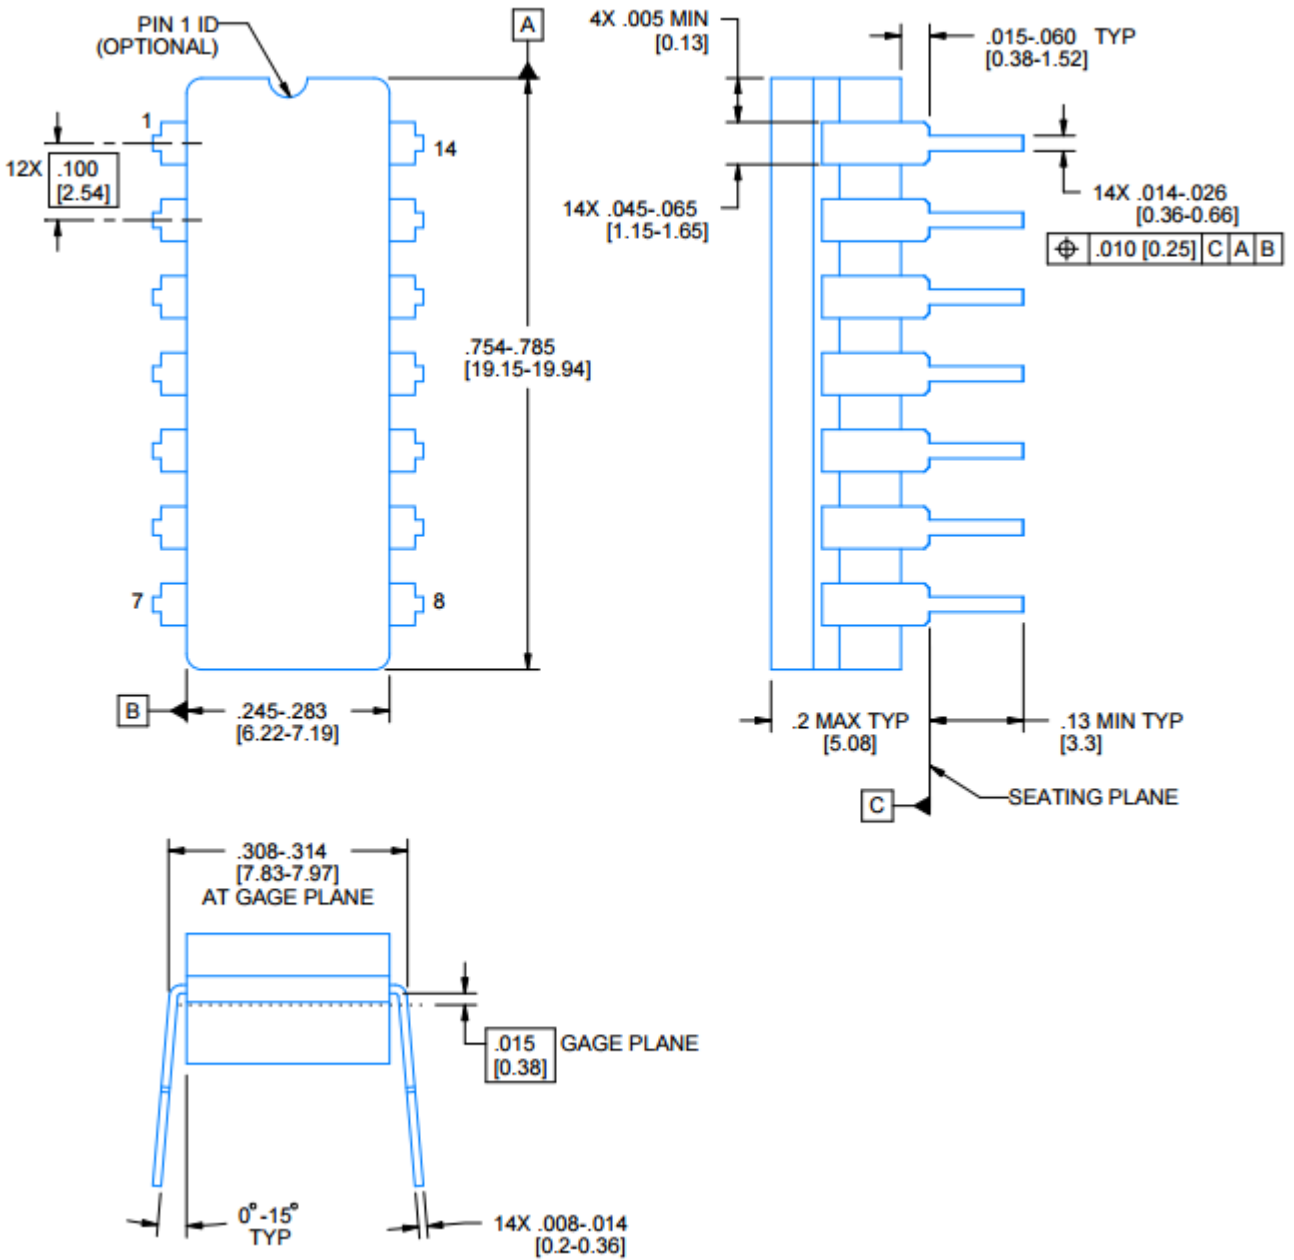

以上信息仅供参考. 如需帮助联系客服人员. 谢谢 XINLUDA