



Plastic High Voltage Rectifier

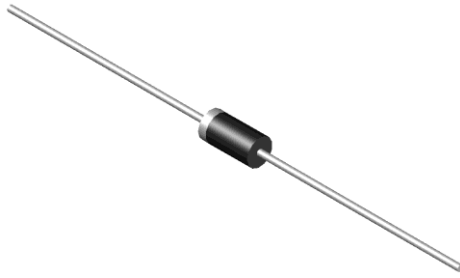

Features

- V_R 4KV
- I_{FAV} 0.2A



■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Repetitive Peak Reverse Voltage	V_{RRM}	KV		4
Average Forward Current	$I_{F(AV)}$	A	(60HZ half-sine wave, Resistance load $T_a=25^\circ\text{C}$)	0.2
Non-Repetitive Forward Surge Current	I_{FSM}	A	(60HZ half-sine wave, 1/2 cycle, $T_a = 25^\circ\text{C}$)	20
Maximum Junction Temperature	T_j	$^\circ\text{C}$		-55~+125
Storage Temperature	T_{stg}	$^\circ\text{C}$		-55~+150

■ Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Forward Voltage Drop	V_F	V	5
Normal Temperature Reverse Current	I_{RM1}	μA	5
High Temperature Reverse Current	I_{RM2}	μA	50

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
R4000	D1	Approximate 0.37	Approximate 3000	3000	30000	Tape



■ Characteristics (Typical)

FIG.1: Io-Ta Curve

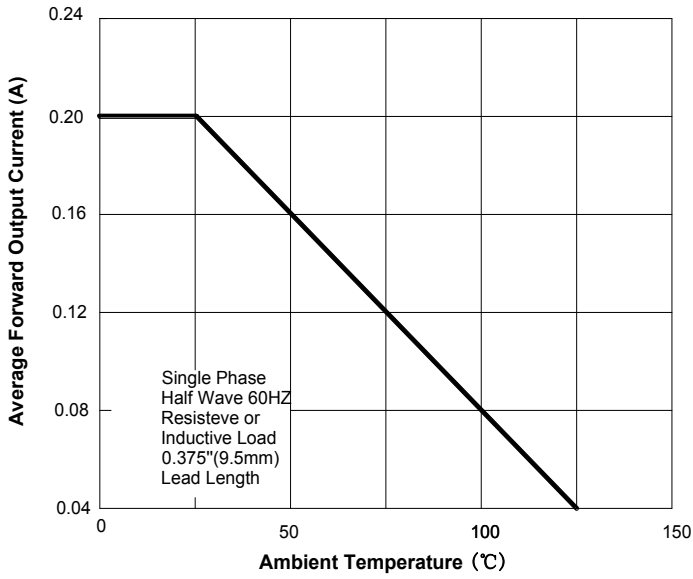


FIG.2: Forward Surge Current Capability

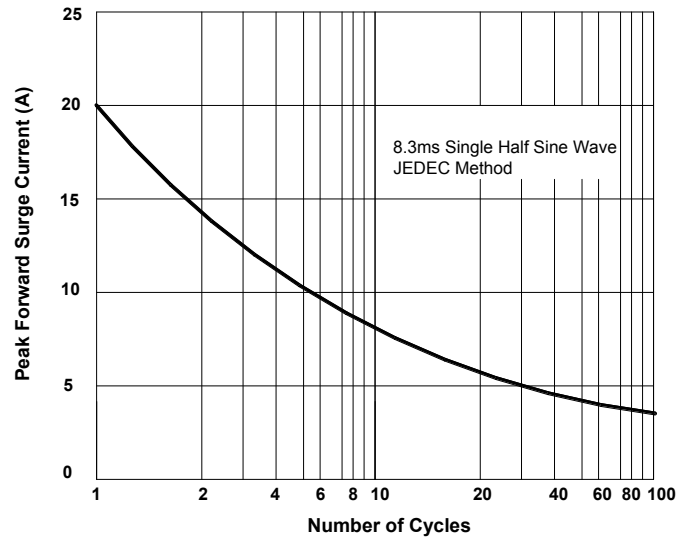


FIG.3: Forward Voltage



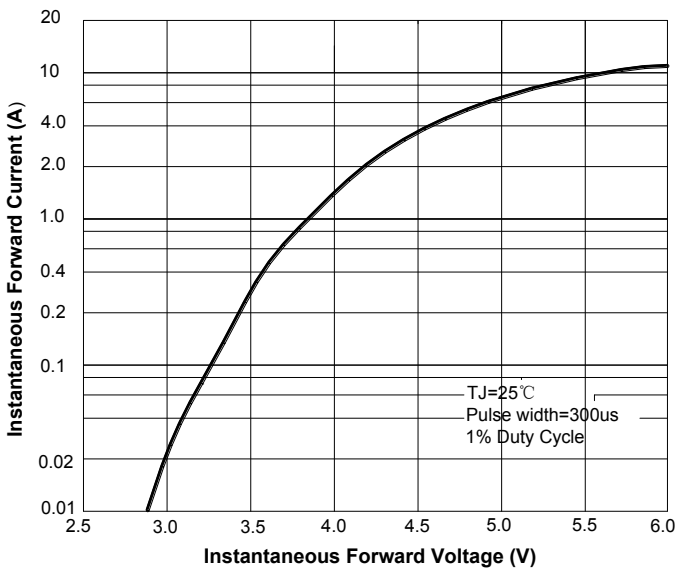


FIG.4: Typical Reverse Characteristics

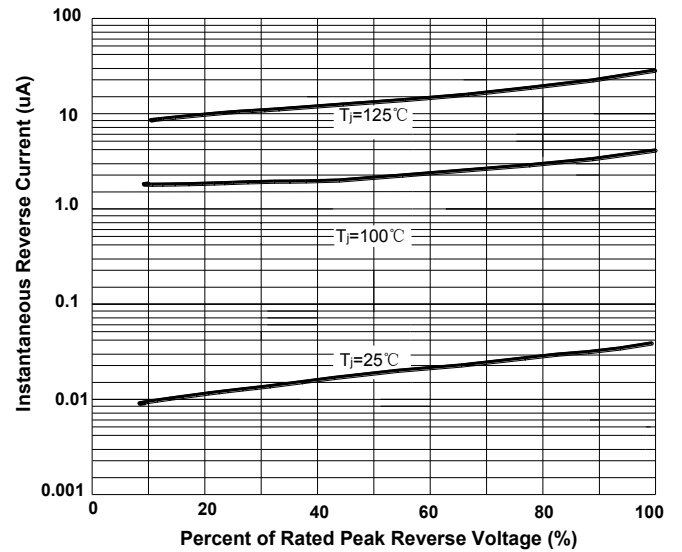

■ Outline Dimensions

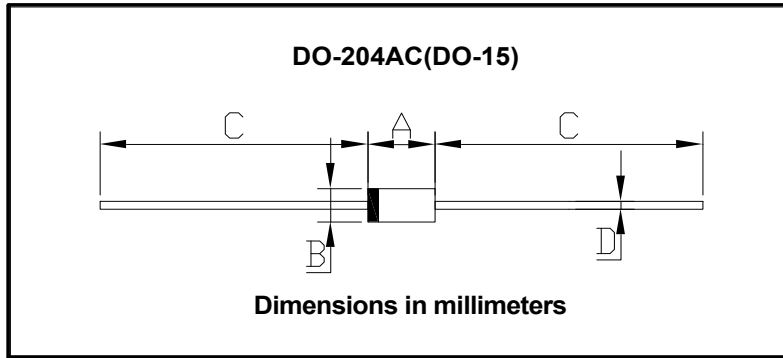

DO-204AC(DO-15)		
Dim	Min	Max
A	5.80	7.60
B	2.60	3.60
C	25.4	/
D	0.70	0.90



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.