

### Features

- Low Clamping Voltage
- Protection One Power Line or I/O Port
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)


## **Maximum Ratings**

- Operating Junction Temperature Range: -55°C to +125°C
- Storage Temperature Range: -55°C to +150°C


MCC Part Number	Device Marking
ESDSLC5V0D3B	R5

IEC61000-4-2(ESD)	Air Contact	±30KV ±30KV
Peak Pulse Current(8/20µs)	I <sub>PP</sub>	18A
Peak Pulse Power (8/20us)	Р <sub>РК</sub>	350W

### Internal Structure






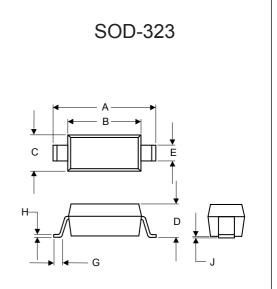

	DIMENSIONS				
DIM INCH		HES	S MM		NOTE
DIVI	MIN	MAX	MIN	MAX	NOTE
А	0.090	0.107	2.30	2.70	
В	0.063	0.071	1.60	1.80	
С	0.045	0.053	1.15	1.35	
D	0.031	0.045	0.80	1.15	
Е	0.010	0.016	0.25	0.40	
G	0.004	0.018	0.10	0.45	
Н	0.004	0.010	0.10	0.25	
J		0.006		0.15	


#### Suggested Solder Pad Layout

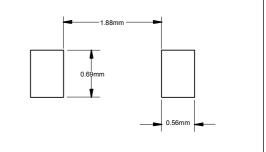



### **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Symbol	Parameter
IPP	Maximum Reverse Peak Pulse Current
Vc	Clamping Voltage @ IPP
V <sub>RWM</sub>	Working Peak Reverse Voltage
I <sub>R</sub>	Maximum Reverse Leakage Current @ $V_{RWM}$
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>
Ι <sub>Τ</sub>	Test Current
С	Capacitance $@V_R=0$ and f =1MHz

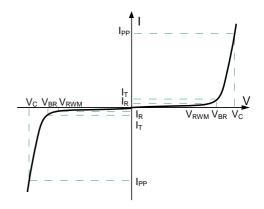

### Electrical Characteristics @ 25°C (Unless Otherwise Specified)

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Reverse Working Voltage	V <sub>RWM</sub>				5	V
Reverse Breakdown Voltage	$V_{BR}$	I <sub>T</sub> = 1mA	6	7		V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =5V			0.5	μA
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =1A, t <sub>P</sub> =8/20μs		8	12	V
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =18A, t <sub>P</sub> =8/20μs		19.5	28	V
Junction Capacitance	CJ	$V_R = 0V$ , f = 1MHz		0.8	1.5	pF





# **Curve Characteristics**

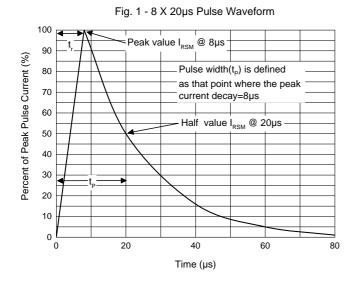


Fig. 3 - Capacitance Characteristics


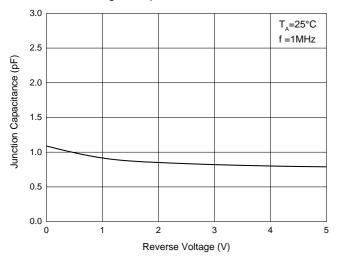


Fig. 2 - Pulse Derating Curve 120 100 Percent of Rated Power (%) 80 60 40 20 0 ∟ 0 25 50 75 100 125 150 Ambient Temperature (°C)

Fig. 4 - Clamping Voltage Characteristics



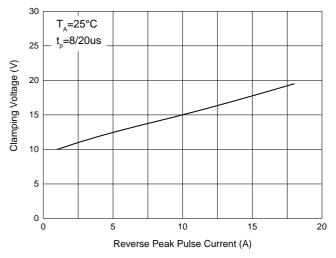

## **Ordering Information**

Device	Packing		
Part Number-TP	Tape&Reel: 3Kpcs/Reel		

Note : Adding "-HF" Suffix for Halogen Free, eg. Part Number-TP-HF

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp*. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources**. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.