


## Super Fast Recovery Rectifier

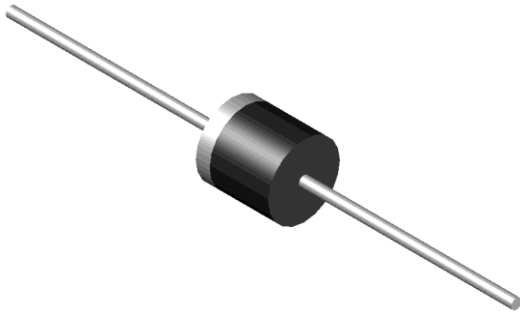


### Features

- Ultrafast reverse recovery time
- Low leakage current
- Low switching losses, high efficiency
- High forward surge capability
- Glass passivated chip junction
- Solder dip 275 °C max. 7 s, per JESD 22-B106

### Typical Applications

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer and telecommunication.

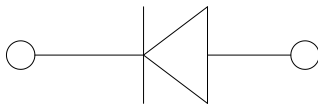

### Mechanical Data

- **Package:** R-6  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Color band denotes the cathode end

### ■ Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SF61G	SF62G	SF63G	SF64G	SF65G	SF66G	SF67G	SF68G
Device marking code			SF61G	SF62G	SF63G	SF64G	SF65G	SF66G	SF67G	SF68G
Repetitive Peak Reverse Voltage	$V_{RRM}$	V	50	100	150	200	300	400	500	600
Average Forward Current @60Hz sine wave, Resistance load, Ta =65°C	$I_{F(AV)}$	A	6.0							
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, Ta=25°C	$I_{FSM}$	A	150							
Storage Temperature	$T_{stg}$	°C	-55 ~+150							
Junction Temperature	$T_j$	°C	-55~+150							

### ■ Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	SF61G	SF62G	SF63G	SF64G	SF65G	SF66G	SF67G	SF68G
Maximum instantaneous forward voltage drop per diode	$V_F$	V	$I_{FM}=6.0A$	0.95				1.3	1.7		
Maximum DC reverse current at rated DC blocking voltage per diode	$I_R$	$\mu A$	$T_a=25^\circ C$	5							
			$T_a=100^\circ C$	150							
Reverse Recovery time	$t_r$	ns	$I_F=0.5A$ $I_R=1A$ $I_{RR}=0.25A$	35							
Typical junction capacitance	$C_j$	pF	Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C.	110				80			



# SF61G THRU SF68G

## ■ Thermal Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SF61G	SF62G	SF63G	SF64G	SF65G	SF66G	SF67G	SF68G
Thermal Resistance	R <sub>θJ-A</sub>	°C/W	12							

## ■ Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SF61G~SF68G	D1	Approximate 1.95	500	500	5000	Tape
SF61G~SF68G	C1	Approximate 1.95	100	100	5000	Bulk

## ■ Characteristics(Typical)

FIG.1: I<sub>o</sub>-T<sub>a</sub> Curve

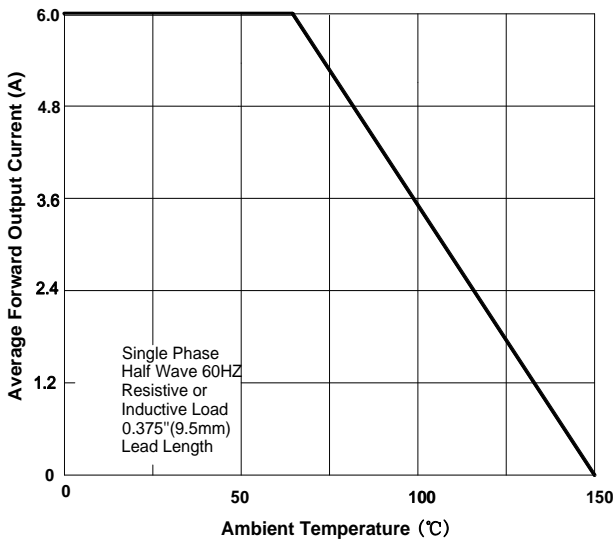


FIG.2: Forward Surge Current Capability

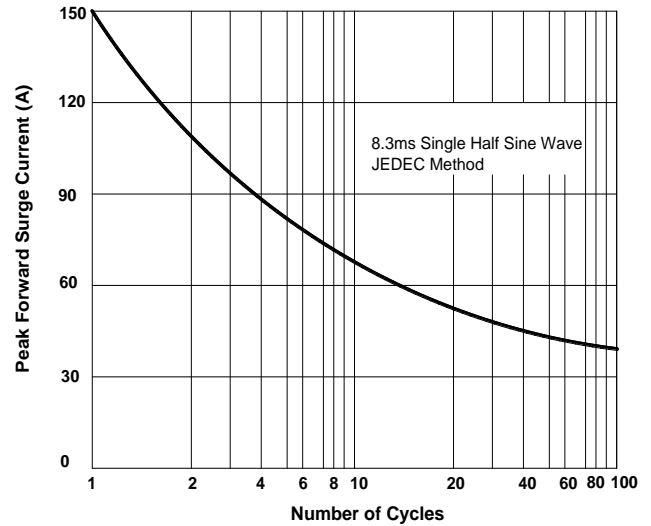


FIG.3: Forward Voltage


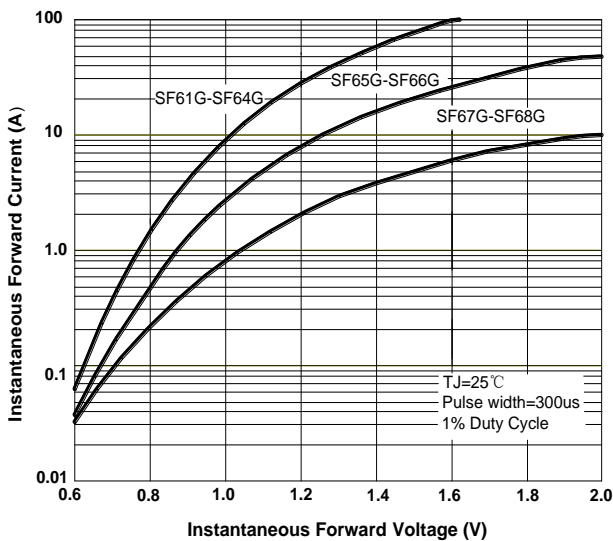



FIG.4: Typical Reverse Characteristics



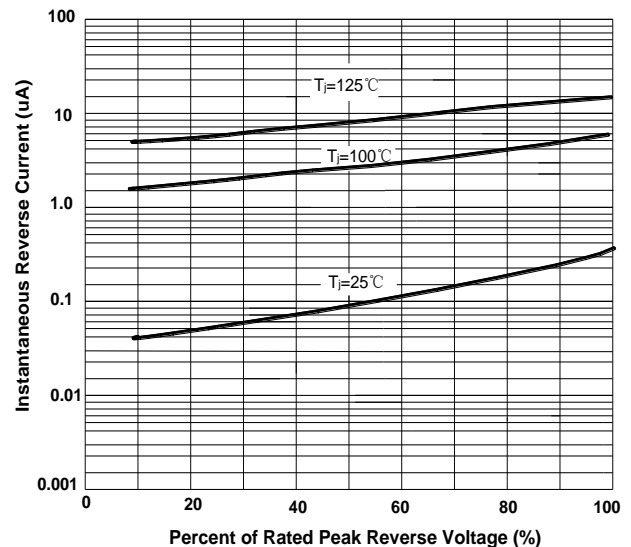


# SF61G THRU SF68G

FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

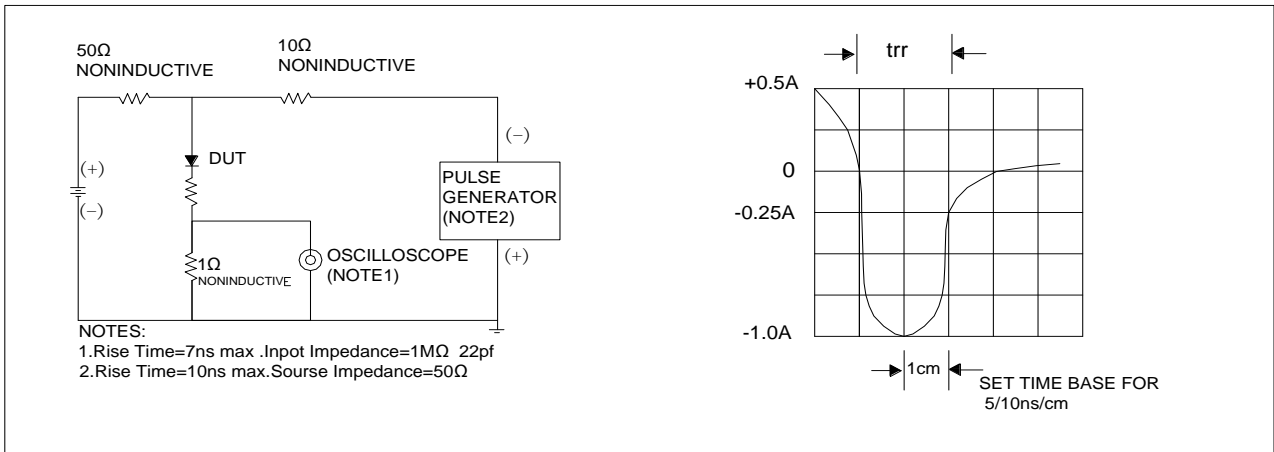

## ■ Outline Dimensions

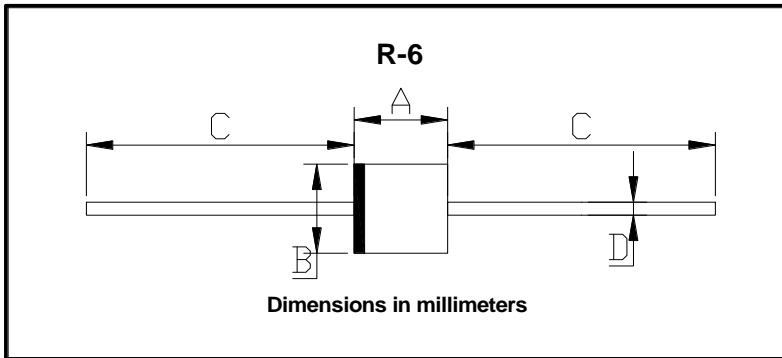

R-6		
Dim	Min	Max
A	8.60	9.10
B	8.60	9.10
C	25.4	/
D	1.20	1.32



## SF61G THRU SF68G

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.