

**WS742905**
**3.5MHz Low-Power 36V Operational Amplifiers**
[Http://www.willsemi.com](http://www.willsemi.com)
**Descriptions**

WS742905 consist of dual channel independent, high gain, internally frequency compensated operational amplifiers which are designed specifically to operate from a single power supply over a wide range of voltages. These devices are particularly useful in interface circuits with digital systems and can be operated from the single common 5VDC power supply.

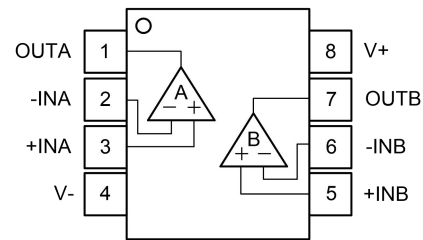
The WS742905 is available in 8-pin SOP and MSOP packages. Standard products are Pb-Free and halogen-Free.


**Features**

- Single Supply Voltage : 3~36V
- Quiescent Current per Amp : 120 $\mu$ A Typical
- GBWP : 3.5MHz
- Slew Rate : 2V/ $\mu$ s
- Offset Voltage : 3.5mV Maximum
- Offset Voltage Temp. Drift : 3 $\mu$ V/ $^{\circ}$ C
- THD+N : -100dB
- CMRR/PSRR/Gain : 130/120/125dB
- Output Short-Circuit Curr. : 18mA
- Input Common-Mode Voltage Range Includes Ground
- No Output Crossover Distortion
- No Phase Reversal from Overdriven Input
- Rail-to-Rail Output Swing
- -40 $^{\circ}$ C to 125 $^{\circ}$ C Operation Range

**Applications**

- Walkie-Talkie
- Battery Management Solution
- Transducer Amplifiers
- Summing Amplifier
- Multivibrators
- Oscillators
- DC Gain Blocks


**SOP-8L**
**MSOP-8L**

**SOP-8L/MSOP-8L**
**Pin configuration (Top view)**

**SOP-8L**

**MSOP-8L**
**Marking**
**742905** = Device code

**2905** = Device code

**GM** = Special code

**Y** = Year code

**W** = Week code

**Order information**

Device	Package	Shipping
WS742905S-8/TR	SOP-8L	4000/Reel &Tape
WS742905M-8/TR	MSOP-8L	4000/Reel &Tape

**Pin Descriptions**

Pin Number	Symbol	Descriptions
1	OUTA	Output
2	-INA	Inverting input
3	+INA	Non-inverting input
4	V-	Negative supply
5	+INB	Non-inverting input
6	-INB	Inverting input
7	OUTB	Output
8	V+	Positive supply

**Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Supply Voltage	$V_{CC}^{(2)}$	42	V
Input Differential Voltage	$V_{IDR}^{(3)}$	$\pm 42$	V
Input Common Mode Voltage Range	$V_{ICR}$	$V^-$ to $V^+ - 2$	V
Output Short-Circuit Duration	$t_{SO}$	Unlimited	/
Operating Free-Air Temperature Range	$T_A$	-40 to 125	$^{\circ}C$
Storage Temperature Range	$T_{STG}$	-65 to 150	$^{\circ}C$
Junction Temperature Range	$T_J$	150	$^{\circ}C$
Lead Temperature Range	$T_L$	260	$^{\circ}C$

**Note:**

- Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are only stress ratings, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions are not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- All voltage values, except differential voltage are with respect to network terminal.
- Differential voltages are at  $IN^+$  with respect to  $IN^-$ .

**ESD, Electrostatic Discharge Protection**

Symbol	Parameter	Condition	Minimum level	Unit
HBM	Human Body Model ESD	MIL-STD-883H Method 3015.8 JEDEC-EIA/JESD22-A114A	$\pm 1500$	V
CDM	Charged Device Model ESD	JEDEC-EIA/JESD22-C101E	$\pm 1500$	V

**Electronics Characteristics**

The \* denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_S = 30\text{V}$ ,  $V_{CM} = V_{OUT} = V_S/2$ ,  $R_{load} = 2\text{k}\Omega$ ,  $C_{load} = 100\text{pF}$ .

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	
$V_{OS}$	Input Offset Voltage	$V_{CM} = V_{SUPPLY}/2$	*	-3.5	$\pm 0.1$	3.5	mV
$\alpha_{VOS}$	Input Offset Voltage Drift			3		$\mu\text{V}/^\circ\text{C}$	
$I_{IB}$	Input Bias Current			20		pA	
$I_{OS}$	Input Offset Current			20		pA	
$V_n$	Input Voltage Noise	$f=0.1\text{Hz to }10\text{Hz}$		8		$\mu\text{V}_{P-P}$	
$e_n$	Input Voltage Noise Density	$f=1\text{KHz}$		32		$\text{nV}/\sqrt{\text{Hz}}$	
		$f=10\text{KHz}$		23			
CMRR	Common Mode Rejection Ratio	DC, $V_S=30\text{V}$ , $V_{CM}=0\text{V to }28\text{V}$	*	105	130		dB
$V_{CM}$	Common Mode Input Voltage Range	$V_S=5\text{V to }30\text{V}$	*	$V^-$		$V^+-2$	V
PSRR	Power Supply Rejection Ratio	$V_S=5\text{V to }30\text{V}$	*	105	120		dB
$A_{VOL}$	Open Loop Large Signal Gain	$V_S=5\text{V}$ , $V_{OUT}=0.1\text{V to }4.9\text{V}$ , $R_{LOAD}=2\text{k}\Omega$	*	90	95		dB
		$V_S=15\text{V}$ , $V_{OUT}=1\text{V to }14\text{V}$ , $R_{LOAD}=10\text{k}\Omega$	*	90	125		
$V_{OH}$	High Level Output Voltage	$R_{LOAD}=2\text{k}\Omega$			13.6		V
		$R_{LOAD}=10\text{k}\Omega$			14.7		
$V_{OL}$	Low Level Output Voltage	$R_{LOAD}=2\text{k}\Omega$			-13.9		V
		$R_{LOAD}=10\text{k}\Omega$			-14.7		
$I_{SC}$	Output Short-Circuit Current	Source Current, $V_S=30\text{V}$	*	18	21		mA
		Sink Current, $V_S=30\text{V}$	*	18	23		
$I_Q$	Quiescent Current per Amplifier	$V_S=5\text{V No Load}$	*		120	165	$\mu\text{A}$
		$V_S=30\text{V No Load}$	*		140	175	
PM	Phase Margin	$R_{LOAD}=2\text{k}\Omega$ , $C_{LOAD}=100\text{pF}$			67		$^\circ$
GM	Gain Margin	$R_{LOAD}=2\text{k}\Omega$ , $C_{LOAD}=100\text{pF}$			-15		dB
GBWP	Gain-Bandwidth Product	$f=1\text{kHz}$			3.5		MHz
$t_s$	Settling Time	$A_V=1$ , $V_{OUT}=1\text{V}$ , 0.1%			1.4		$\mu\text{s}$
SR	Slew Rate	$A_V=1$ , $V_S=\pm 15\text{V}$ , $V_{OUT}=-10\text{V to }10\text{V}$ , $R_{LOAD}=10\text{k}\Omega$ , $C_{LOAD}=100\text{pF}$			2		$\text{V}/\mu\text{s}$
FPBW	Full Power Bandwidth				58		kHz
THD+N	Total Harmonic Distortion and Noise	$f=1\text{kHz}$ , $A_V=1$ , $R_{LOAD}=2\text{k}\Omega$ , $V_{OUT}=2V_{PP}$			-100		dB
$X_{talk}$	Channel Separation	$f=1\text{kHz}$			95		dB

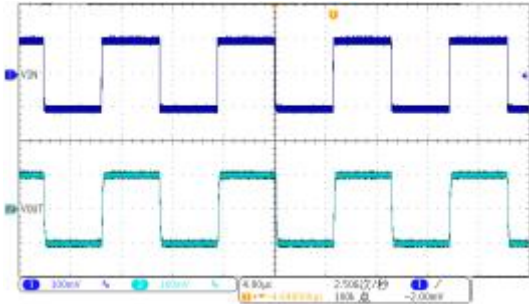
**Note:**

1. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.
2. A heat sink may be required to keep the junction temperature below the absolute maximum rating when the output is shorted indefinitely.
3. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.
4. Full power bandwidth is calculated from the slew rate  $FPBW = SR/(\pi \cdot V_{P-P})$ .

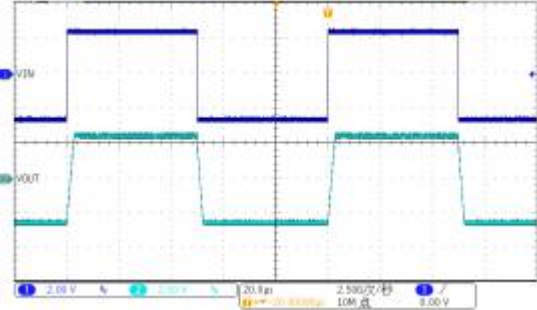
### Typical Characteristics

$T_A=25^{\circ}\text{C}$ ,  $V_S=\pm 15\text{V}$ ,  $V_{CM}=0\text{V}$ ,  $R_{load}=\text{Open}$ , unless otherwise noted

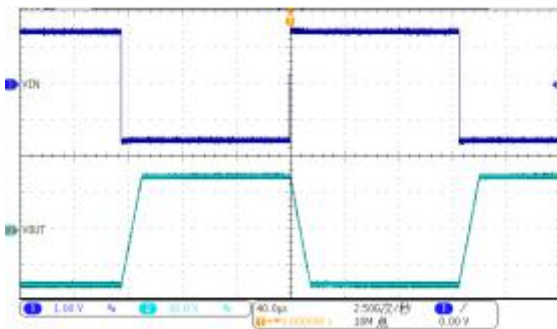
**Small-Signal Step Response, 100mV Step**



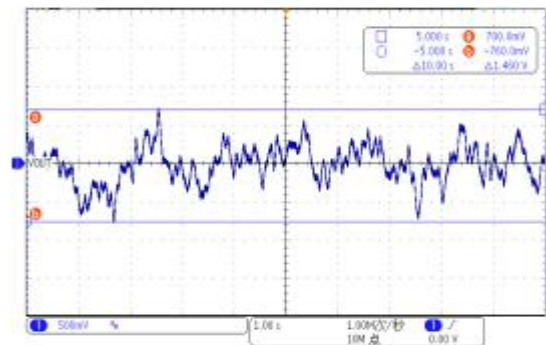
**Large-Signal Step Response, 2V Step**



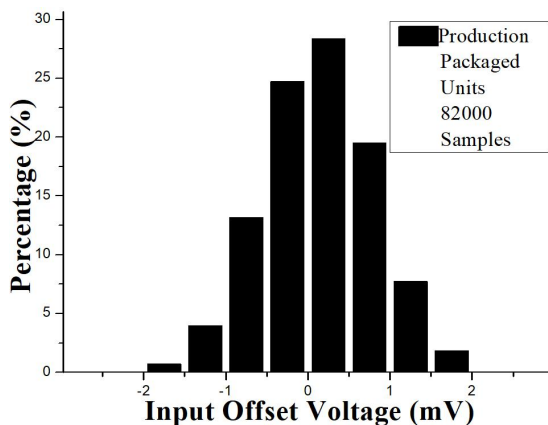
**Negative/Positive Over-Voltage Recovery**



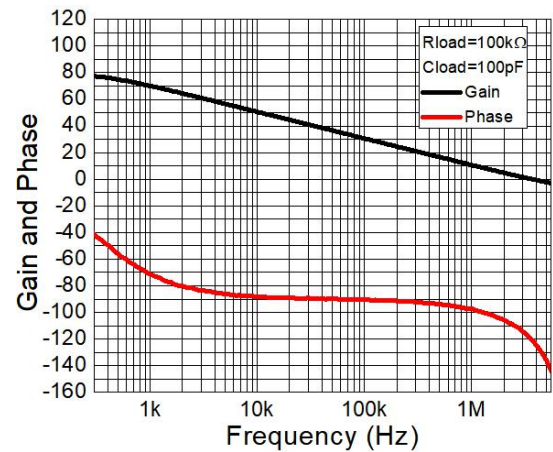
**0.1Hz to 10Hz Integrated Input Noise,  
Gain = 50000**



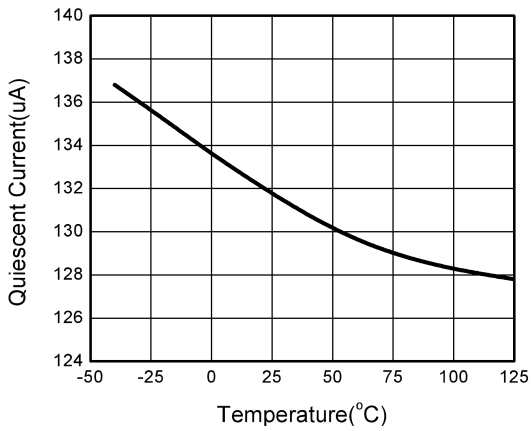
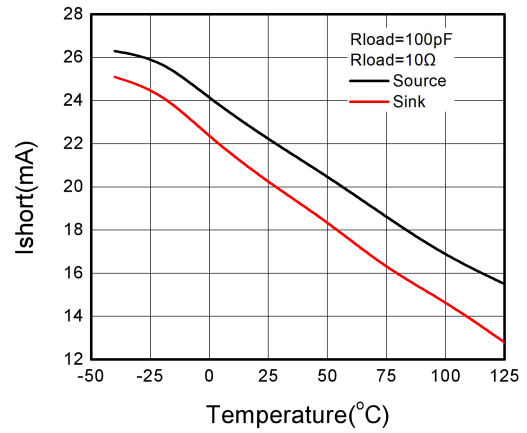
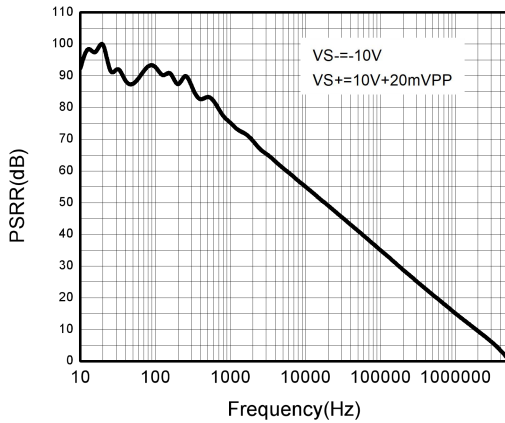
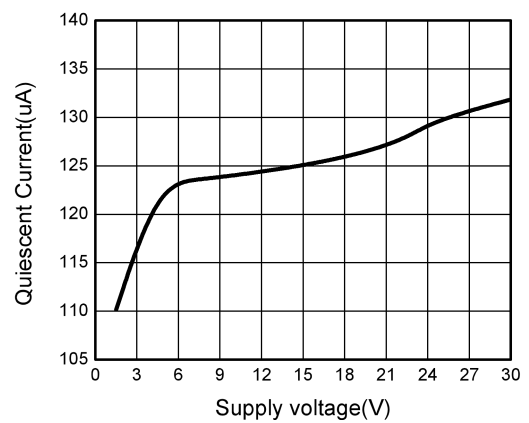
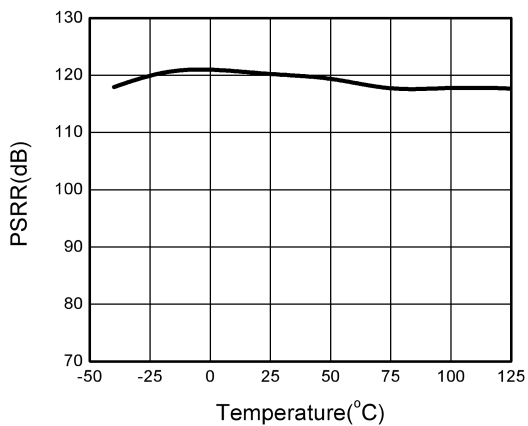
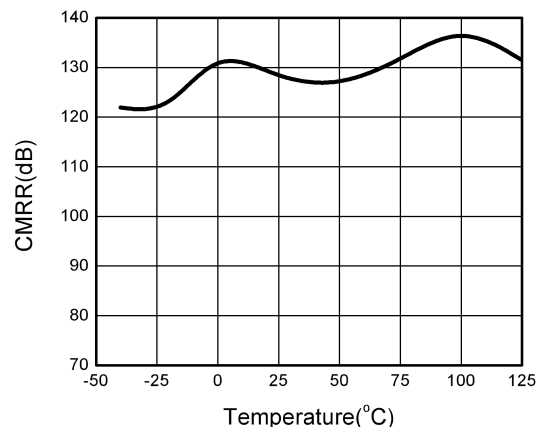
**Input Offset Voltage Distribution**



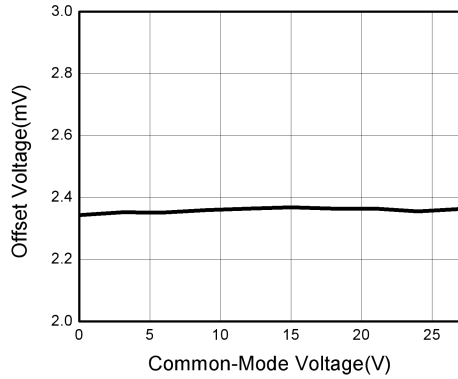
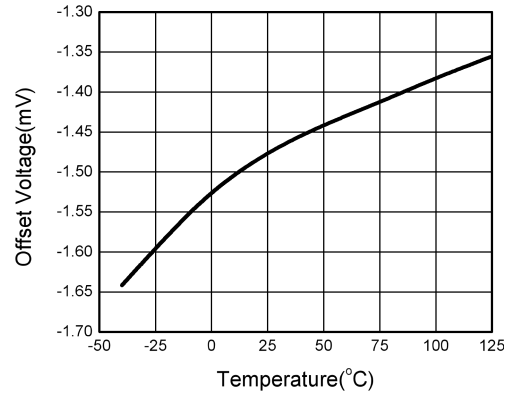
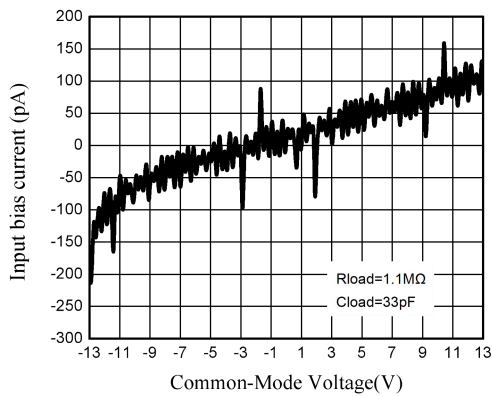
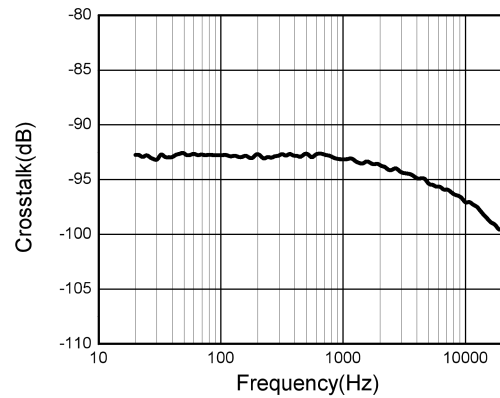
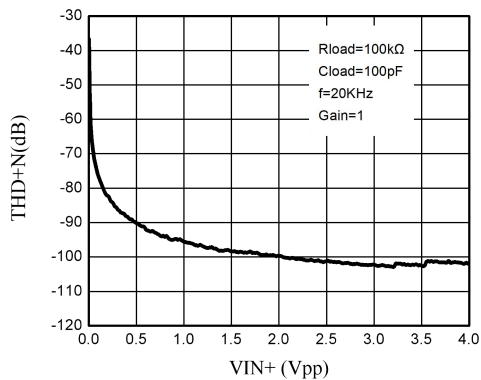
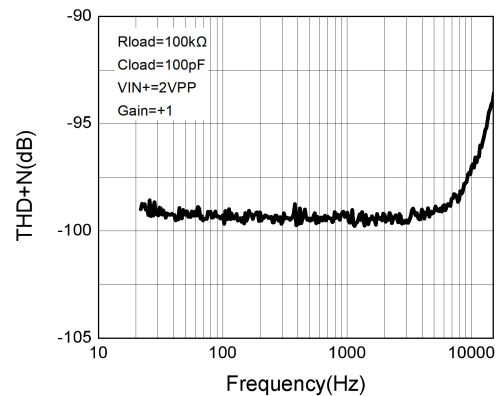
**Open-Loop Gain and Phase**

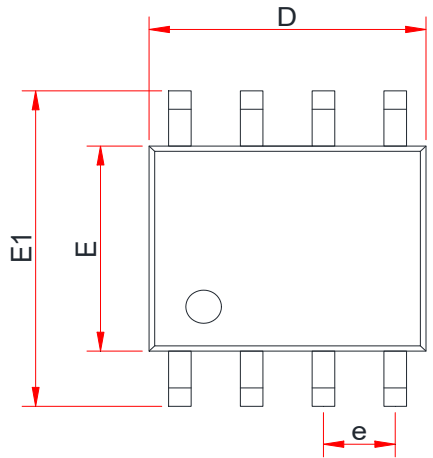
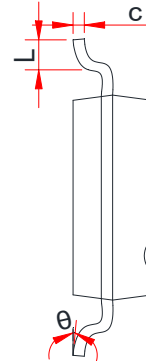
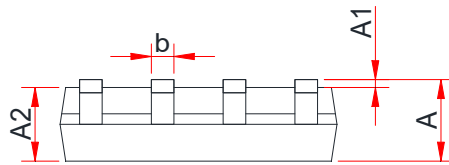


**Typical Characteristics (continued)**
 $T_A=25^{\circ}\text{C}$ ,  $V_S=\pm 15\text{V}$ ,  $V_{CM}=0\text{V}$ ,  $R_{load}=\text{Open}$ , unless otherwise noted

**Quiescent Supply Current vs. Temperature**

**Short-Circuit Current vs. Temperature**

**PSRR vs. Frequency**

**Quiescent Supply Current vs. Supply Voltage**

**PSRR vs. Temperature**

**CMRR vs. Temperature**


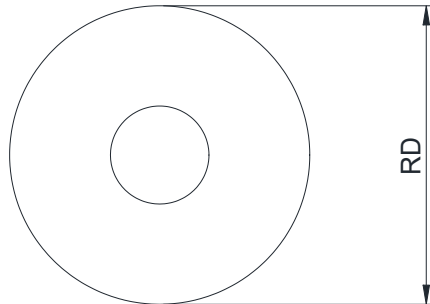
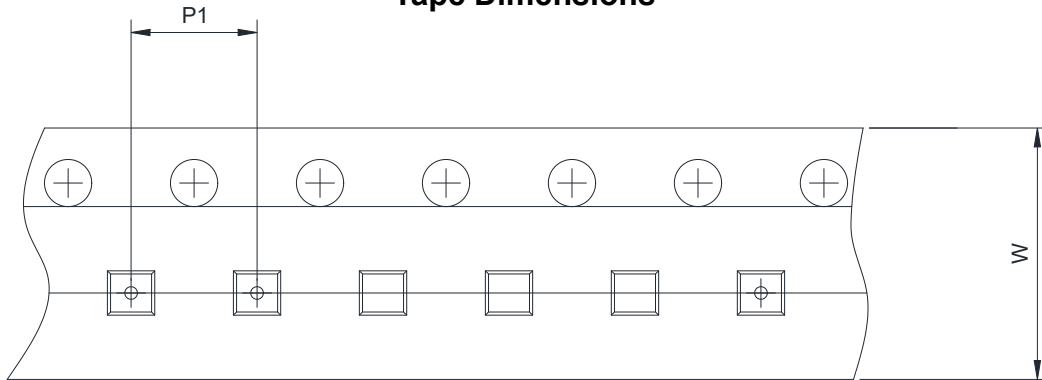
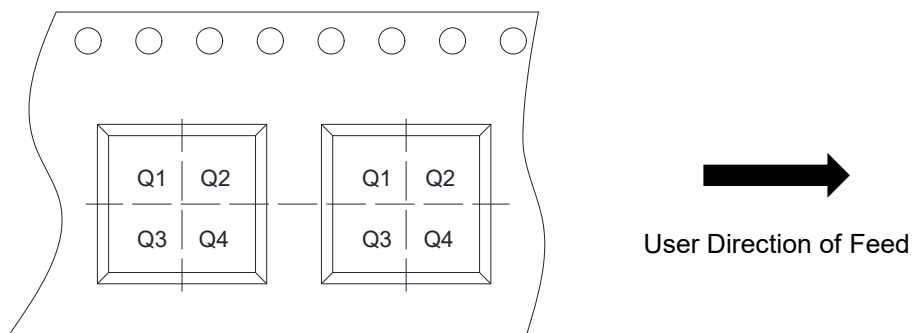
**Typical Characteristics (continued)**
 $T_A=25^{\circ}\text{C}$ ,  $V_S=\pm 15\text{V}$ ,  $V_{CM}=0\text{V}$ ,  $R_{load}=\text{Open}$ , unless otherwise noted

**Input Offset Voltage vs. Common-Mode Voltage**

**Input Offset Voltage vs. Temperature**

**Input Bias Current vs. Common-Mode Voltage**

**Crosstalk,  $V_{in+}=1\text{k}\Omega$  to GND**

**THD+Noise vs.  $V_{in+}$** 

**THD+Noise vs. Frequency**


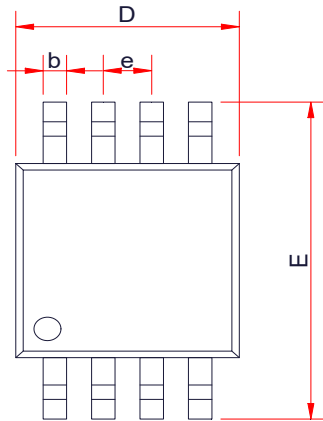
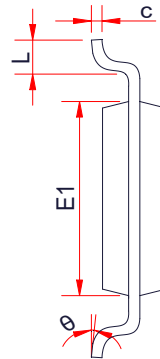
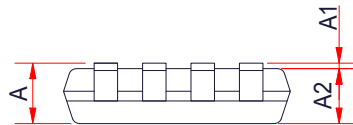
**PACKAGE OUTLINE DIMENSIONS**
**SOP-8L**

**TOP VIEW**

**SIDE VIEW**

**SIDE VIEW**

Symbol	Dimensions In Millimeters (mm)		
	Min.	Typ.	Max.
A	1.35	1.55	1.75
A1	0.05	0.15	0.25
A2	1.25	1.40	1.65
b	0.33	-	0.51
c	0.15	-	0.26
D	4.70	4.90	5.10
E	3.70	3.90	4.10
E1	5.80	6.00	6.20
e	1.27BSC		
L	0.40	-	1.27
$\theta$	0°	-	8°

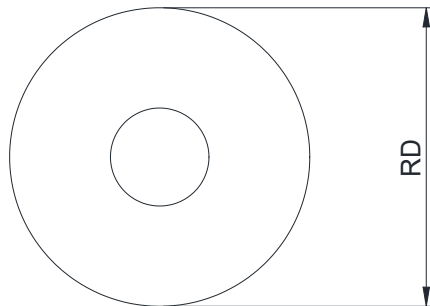
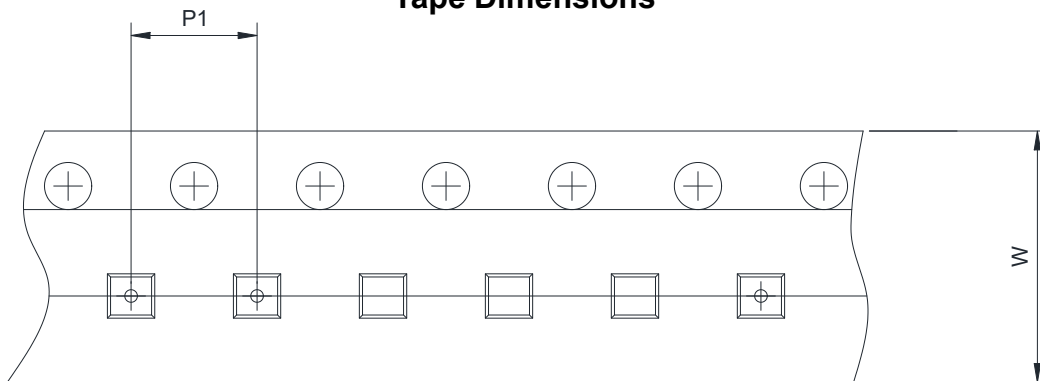
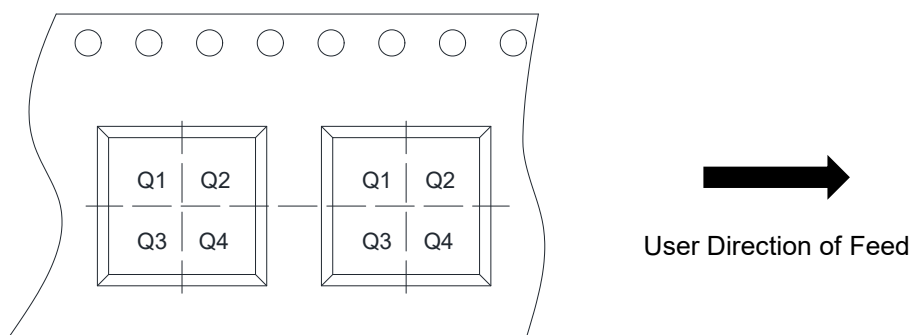


**TAPE AND REEL INFORMATION**
**SOP-8L**
**Reel Dimensions**

**Tape Dimensions**

**Quadrant Assignments For PIN1 Orientation In Tape**


RD	Reel Dimension	<input type="checkbox"/> 7inch	<input checked="" type="checkbox"/> 13inch		
W	Overall width of the carrier tape	<input type="checkbox"/> 8mm	<input checked="" type="checkbox"/> 12mm		
P1	Pitch between successive cavity centers	<input type="checkbox"/> 2mm	<input type="checkbox"/> 4mm	<input checked="" type="checkbox"/> 8mm	
Pin1	Pin1 Quadrant	<input checked="" type="checkbox"/> Q1	<input type="checkbox"/> Q2	<input type="checkbox"/> Q3	<input type="checkbox"/> Q4

**PACKAGE OUTLINE DIMENSIONS**
**MSOP-8L**

**TOP VIEW**

**SIDE VIEW**

**SIDE VIEW**

Symbol	Dimensions In Millimeters (mm)		
	Min.	Typ.	Max.
A	-	-	1.10
A1	0.02	-	0.15
A2	0.75	0.80	0.95
b	0.25	-	0.38
c	0.09	-	0.23
D	2.90	3.00	3.10
E	4.75	4.90	5.05
E1	2.90	3.00	3.10
e	0.65 BSC		
L	0.40	-	0.80
$\theta$	0°	-	6°

**TAPE AND REEL INFORMATION**
**MSOP-8L**
**Reel Dimensions**

**Tape Dimensions**

**Quadrant Assignments For PIN1 Orientation In Tape**


RD	Reel Dimension	<input type="checkbox"/> 7inch	<input checked="" type="checkbox"/> 13inch		
W	Overall width of the carrier tape	<input type="checkbox"/> 8mm	<input checked="" type="checkbox"/> 12mm		
P1	Pitch between successive cavity centers	<input type="checkbox"/> 2mm	<input type="checkbox"/> 4mm	<input checked="" type="checkbox"/> 8mm	
Pin1	Pin1 Quadrant	<input checked="" type="checkbox"/> Q1	<input type="checkbox"/> Q2	<input type="checkbox"/> Q3	<input type="checkbox"/> Q4