

CD4543BM/CD4543BC BCD-to-7-Segment Latch/Decoder/Driver for Liquid Crystals

General Description

The CD4543BM/CD4543BC is a monolithic CMOS BCD-to-7-segment latch/decoder/driver for use with liquid crystal and other types of displays. The circuit provides the functions of a 4-bit storage latch and an 8421 BCD-to-7-seqment decoder and driver. The device has the capability to invert the logic levels of the output combination. The phase (Ph), blanking (Bl) and latch disable (LD) inputs are used to reverse the truth table phase, blank the display, and store a BCD code, respectively. For liquid crystal (LC) readouts, a square wave is applied to the Ph input of the circuit and the electrically common backplane of the display, and the outputs of the circuit are connected directly to the segments of the LC readout. For other types of readouts, such as lightemitting diode (LED), incandescent, gas discharge, and fluorescent readouts, connection diagrams are given on this data sheet.

All inputs are protected against static discharge by diode clamps to V_{DD} and $V_{SS}. \label{eq:vss}$

Features


- Wide supply voltage range
- High noise immunity
- Low power TTL compatibility
- Low power dissipation

- 3.0V to 18V
- 0.45 V_{DD} (typ.)
- Fan out of 2 driving 74L or 1 driving 74LS
 - 50 nA/package (typ.) at V_{DD} = 5.0V
- Latch storage
- Blanking input
- Blank for all illegal inputs
- Direct-drive LCD, LED and VF displays
- Pin-for-pin replacement for CD4056B (with pin 7 tied to V_{SS})
- Pin-for-pin replacement for Motorola MC14543B

Applications

- Instrument (e.g., counter, DVM, etc.) display driver
- Computer/calculator display driver
- Cockput display driver
- Various clock, watch, and timer users

Connection Diagram and Truth Table

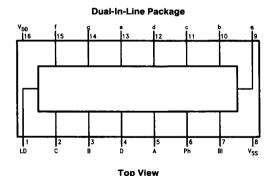

Order Number CD4543B*

*Please look into Section 8, Appendix D for availability of various package types.

		Inp	uts							C	utp	uts		
LD	ВІ	Ph*	D	С	В	A	а	þ	С	d	е	f	9	Display
Х	1	0	х	Х	Х	Х	0	0	0	0	0	0	0	Blank
1	0	0	0	0	0	0	1	1	1	1	1	1	0	0
1	0	0	0	0	0	1	0	1	1	0	0	0	0	1
1	0	0	0	0	1	0	1	1	0	1	1	0	1	2
1	0	0	0	0	1	1	1	1	1	1	0	0	1	3
1	0	0	0	1	0	0	0	1	1	0	0	1	1	4
1	0	0	0	1	0	1	1	0	1	1	0	1	1	5 6
1	0	0	0	1	1	0	1	0	1	1	1	1	1	6
1	0	0	0	1	1	1	1	1	1	0	0	0	0	7
1	0	0	1	0	0	0	1	1	1	1	1	1	1	В
1	0	0	1	0	0	1	1	1	1	1	0	1	1	9
1	0	0	1	0	1	0	0	0	0	0	0	0	0	Blank
1	0	0	1	0	1	1	0	0	0	0	0	0	0	Blank
1	0	0	1	1	0	0	0	0	0	0	0	0	0	Blank
1	0	0	1	1	0	1	0	0	0	0	0	0	0	Blank
1	0	0	1	1	1	0	0	0	0	0	0	0	0	Blank
1	0	0	1	1	1	1	0	0	0	0	0	0	0	Blank
0	0	0	х	Х	Х	х				••				**
†	†	1		•	t					utput s Abo	nve			Display as Above

- X = Don't care
- † = Above combinations
- = For liquid crystal readouts, apply a square wave to Ph For common cathode LED readouts, select Ph = 0.
 For common anode LED readouts, select Ph = 1.
- ** = Depends upon the BCD code previously applied when LD = 1.

Display Format





Absolute Maximum Ratings (Notes 1 & 2)

If Military/Aerospace specified devices are required, contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

DC Supply Voltage (V_{DD}) $-0.5~\mathrm{V_{DC}~to}~+18~\mathrm{V_{DC}}$

 $\begin{array}{ll} \mbox{Input Voltage (V_{IN})} & -0.5 \ \mbox{V}_{DC} \ \mbox{to V}_{DD} + 0.5 \ \mbox{V}_{DC} \\ \mbox{Storage Temp. Range (T_S)} & -65^{\circ}\mbox{C to } +150^{\circ}\mbox{C} \end{array}$

Power Dissipation (P_D)

 Dual-In-Line
 700 mW

 Small Outline
 500 mW

Lead Temperature (T_L) (Soldering, 10 seconds)

260°C

Recommended Operating

Conditions (Note 2)

DC Supply Voltage (V_{DD}) 3 V_{DC} to 15 V_{DC} Input Voltage (V_{IN}) 0 V_{DC} to V_{DD} V_{DC}

Operating Temperature Range (T_A) CD4543BM CD4543BC

-55°C to +125°C -40°C to +85°C

DC Electrical Characteristics CD4543BM (Note 2)

Symbol	Parameter	Conditions	-5	5°C	+ 25°C			+ 12	5°C	Units
V _{OL} V _{OH} V _{IL} V _{IH}			Min	Max	Min	Тур	Max	Min	Max	Oints
I _{DD}	Quiescent Device Current	$egin{array}{lll} V_{DD} = 5 V, V_{IN} = V_{DD} \ \mbox{or} \ V_{SS} \ V_{DD} = 10 V, V_{IN} = V_{DD} \ \mbox{or} \ \mbox{V}_{SS} \ V_{DD} = 15 V, V_{IN} = V_{DD} \ \mbox{or} \ \mbox{V}_{SS} \ \end{array}$		5 10 20			5 10 20		150 300 600	μΑ μΑ μΑ
V _{OL}	Low Level Output Voltage	$ \left. \begin{array}{l} V_{DD} = 5V \\ V_{DD} = 10V \\ V_{DD} = 15V \end{array} \right\} \left I_O \right < 1 \; \mu A $		0.05 0.05 0.05		0 0 0	0.05 0.05 0.05		0.05 0.05 0.05	V V
V _{OH}	High Level Output Voltage	$ \left. \begin{array}{l} V_{DD} = 5V \\ V_{DD} = 10V \\ V_{DD} = 15V \end{array} \right\} \left i_O \right < 1 \; \mu \text{A} $	4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95		V V
V _{IL}	Low Level Input Voltage	$egin{array}{lll} V_{DD} = 5V, V_{O} = 0.5V \ \text{or} \ 4.5V \ V_{DD} = 10V, V_{O} = 1V \ \text{or} \ 9V \ V_{DD} = 15V, V_{O} = 1.5V \ \text{or} \ 13.5V \end{array}$		1.5 3.0 4.0			1.5 3.0 4.0		1.5 3.0 4.0	V V
V _{IH}	High Level Input Voltage	$V_{DD} = 5V, V_{O} = 0.5V \text{ or } 4.5V \ V_{DD} = 10V, V_{O} = 1V \text{ or } 9V \ V_{DD} = 15V, V_{O} = 1.5V \text{ or } 13.5V$	3.5 7.0 11.0		3.5 7.0 11.0			3.5 7.0 11.0		V V
loL	Low Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 0.4V$ $V_{DD} = 10V, V_{O} = 0.5V$ $V_{DD} = 15V, V_{O} = 1.5V$	0.64 1.6 4.2		0.51 1.3 3.4			0.36 0.9 2.4	·	mA mA mA
Юн	High Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 4.6V$ $V_{DD} = 10V, V_{O} = 9.5V$ $V_{DD} = 15V, V_{O} = 13.5V$	-0.64 -1.6 -4.2		-0.51 -1.3 -3.4			-0.36 -0.9 -2.4		mA mA mA
liN	Input Current	$V_{DD} = 15V, V_{IN} = 0V$ $V_{DD} = 15V, V_{IN} = 15V$		0.1 0.1		-10 ⁻⁵	-0.1 0.1		-1.0 1.0	μA μA

DC Electrical Characteristics CD4543BC (Note 2)

Symbol	Parameter	Conditions	-40	0°C	+ 25°C			+ 8:	5°C	Units
V _{OL}	- urumotor	Conditions	Min	Max	Min	Тур	Max	Min	Max	Oilles
I _{DD}	Quiescent Device Current	V _{DD} = 5V, V _{IN} = V _{DD} or V _{SS} V _{DD} = 10V, V _{IN} = V _{DD} or V _{SS} V _{DD} = 15V, V _{IN} = V _{DD} or V _{SS}		20 40 80			20 40 80		150 300 600	μΑ μΑ μΑ
V _{OL}	Low Level Output Voltage	$ \left. \begin{array}{l} V_{DD} = 5V \\ V_{DD} = 10V \\ V_{DD} = 15V \end{array} \right\} \left I_O \right < 1 \; \mu A $		0.05 0.05 0.05		0 0 0	0.05 0.05 0.05		0.05 0.05 0.05	>>>
V _{OH}	High Level Output Voltage	$ \begin{array}{c} V_{DD} = 5V \\ V_{DD} = 10V \\ V_{DD} = 15V \end{array} \right\} \left I_O \right < 1 \; \mu A \\ \end{array} $	4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95		>>>
V _{IL}	Low Level Input Voltage	$V_{DD} = 5V$, $V_{O} = 0.5V$ or 4.5V $V_{DD} = 10V$, $V_{O} = 1V$ or 9V $V_{DD} = 15V$, $V_{O} = 1.5V$ or 13.5V		1.5 3.0 4.0			1.5 3.0 4.0		1.5 3.0 4.0	> > >
V _{IH}	High Level Input Voltage	$V_{DD} = 5V, V_{O} = 0.5V \text{ or } 4.5V \ V_{DD} = 10V, V_{O} = 1V \text{ or } 9V \ V_{DD} = 15V, V_{O} = 1.5V \text{ or } 13.5V$	3.5 7.0 11.0		3.5 7.0 11.0			3.5 7.0 11.0		>>>
l _{OL}	Low Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 0.4V$ $V_{DD} = 10V, V_{O} = 0.5V$ $V_{DD} = 15V, V_{O} = 1.5V$	0.52 1.3 3.6		0.44 1.1 3.0			0.36 0.9 2.4		mA mA mA



DC Electrical Characteristics CD4543BC (Note 2) (Continued

Symbol	Parameter	Conditions	-40	D.C		+ 25°		+ 85°C		Units
		Containono	Min	Max	Min	Тур	Max	Min	Max	Units
loн	High Level Output Current (Note 3)	$V_{DD} = 5V, V_{O} = 4.6V$ $V_{DD} = 10V, V_{O} = 9.5V$ $V_{DD} = 15V, V_{O} = 13.5V$	-0.52 -1.3 -3.6		-0.44 -1.1 -3.0			-0.36 -0.9 -2.4		mA mA mA
IIN	Input Current	$V_{DD} = 15V, V_{IN} = 0V$ $V_{DD} = 15V, V_{IN} = 15V$		-0.3 0.3		-10 ⁻⁵	-0.3 0.3		-1.0 1.0	μA μA

AC Electrical Characteristics* $T_A = 25^{\circ}C$, $C_L = 50$ pF, $V_{SS} = 0$, unless otherwise specified

Symbol	Parameter	Conditions	Min	Тур	Max	Units
t _r	Output Rise Time	$V_{DD} = 5V$		100	200	ns
		V _{DD} = 10V		50	100	ns
		V _{DD} = 15V		40	80	ns
t _f	Output Fall Time	V _{DD} = 5V		100	200	ns
		$V_{DD} = 10V$		50	100	ns
		V _{DD} = 15V		40	80	ns
t _{PLH}	Turn-ON Propagation	$V_{DD} = 5V$		450	1100	ns
	Delay Time	V _{DD} = 10V	1	170	440	ns
		V _{DD} = 15V		110	330	ns
t _{PHL}	Turn-OFF Propagation	V _{DD} = 5V		500	1100	ns
	Delay Time	V _{DD} = 10V		180	440	ns
		V _{DD} = 15V		120	330	ns
t _{SET-UP}	Set-Up Time	$V_{DD} = 5V$		-5	80	ns
		$V_{DD} = 10V$		-2	30	ns
		V _{DD} = 15V		0	20	ns
t _{HOLD}	Hold Time	$V_{DD} = 5V$		30	120	ns
		$V_{DD} = 10V$		20	45	ns
		V _{DD} = 15V		15	30	ns
PW_{LD}	Latch Disable	$V_{DD} = 5V$		50	250	ns
	Pulse Width	V _{DD} = 10V		30	100	ns
		V _{DD} = 15V		20	80	ns
C _{IN}	Input Capacitance	Per Input		5	7.5	pF
C _{PD}	Power Dissipation Capacitance	See C _{PD} Measurement Waveforms (Note 4)		300		pF

^{*}AC Parameters are guaranteed by DC correlated testing.

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The tables of "Recommended Operating Conditions" and Electrical Characteristics" provide conditions for actual device operation.


Note 2: V_{SS} = 0V unless otherwise specified.

Note 3: I_{OH} and I_{OL} are tested one output at a time.

Note 4: CpD determines the no load AC power consumption of a CMOS device. For a complete explanation, see "MM54C/74C Family Characteristics" Application Note AN-90.




Logic Diagram

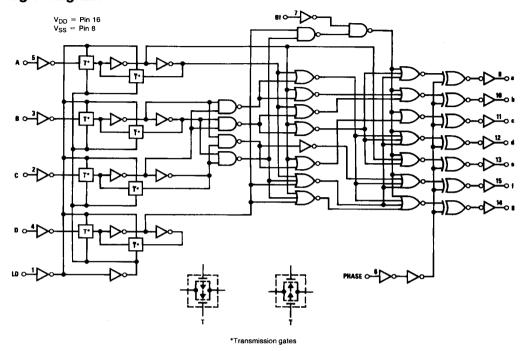


Typical Applications


Liquid Crystal (LC) Readout



Incandescent Readout




Light Emitting Diode (LED) Readout

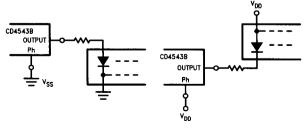


Note: Bipolar transitors may be added for gain (for $V_{DD} \leq 10 V$ or $I_{OUT} \geq 10$ mA)



Typical Applications (Continued)

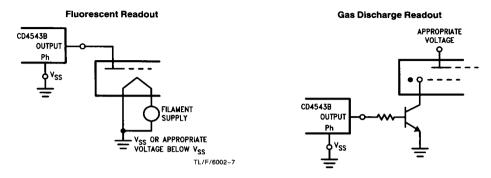

3½-Digit DVM with LCD Display

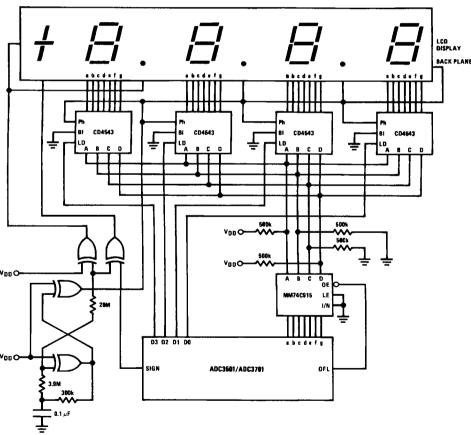


Display 9.999 when overflowed. All digits can also be blanked at overflow by typing OFL to BI on the CD4543's.



Switching Time Waveforms


CPD Measurement Waveforms





Inputs BI and Ph low, and inputs D and LD high. f in respect to a system clock.

All outputs connected to respective C_L loads.


Dynamic Signal Waveforms

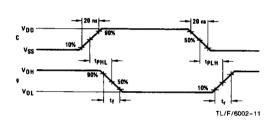



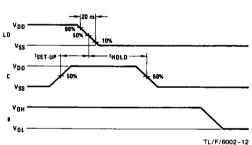

(b) (Inputs D, Ph and BI Low, and Inputs A and B High



(c) Data DCBA Strobe into Latches



Important statement:

Huaguan Semiconductor Co,Ltd. reserves the right to change the products and services provided without notice. Customers should obtain the latest relevant information before ordering, and verify the timeliness and accuracy of this information.

Customers are responsible for complying with safety standards and taking safety measures when using our products for system design and machine manufacturing to avoid potential risks that may result in personal injury or property damage.

Our products are not licensed for applications in life support, military, aerospace, etc., so we do not bear the consequences of the application of these products in these fields.

Our documentation is only permitted to be copied without any tampering with the content, so we do not accept any responsibility or liability for the altered documents.