

產品編碼 P/N	PMAF1608-100K	測試設備 TEST INSTRUMENT	Zentech-3305 / Zentech502BC
產品系列 Series	Multilayer Chip Ceramic Inductor	測試頻率 TEST FREQUENCY	2MHZ / 0.06V

客戶名稱 : 立创商城
 Customer
 客戶編碼 :
 Customer P/N
 產品系列 : Multilayer Chip Ceramic Inductor
 Series
 產品編碼 : PMAF1608-100K
 Supply P/N
 發版號 : A2.0
 Version
 承認日期 : 2020-9-16
 Endorsement Date
 備註 :
 Note

譜羅德電子科技（深圳）有限公司 PROD Electronic Technology (Shenzhen) Co. LTD	
製作 APPROVED	Ben
審查 CHECKED	Yuki
確認 PREPARED	Peter


客戶承認 Customer Approval
Signature area

客戶簽章



產品編碼 P/N	PMAF1608-100K	測試設備 TEST INSTRUMENT	Zentech-3305 / Zentech502BC
產品系列 Series	Multilayer Chip Ceramic Inductor	測試頻率 TEST FREQUENCY	2MHZ / 0.06V

封裝尺寸 Dimension (mm)

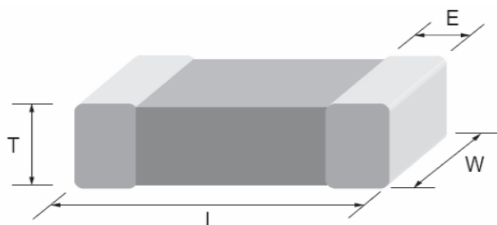

1608 (0603)	封裝尺寸 Dimension
L	1.60±0.15
W	0.80±0.15
T	0.80±0.15
E	0.30±0.20

編碼解釋

Code interpretation

PMAF	1608	100	-	K
類別碼	尺寸系列	感值		精度
Category code	Dimension	Inductance		Tolerance

電氣參數

Electrical Characteristics

產品編碼 P/N	@ 25 °C Ambient Temperture					
	感值	精度	DCR	Q	額定電流	自諧頻率
	Inductance	Tolerance	Ω	@100MHZ	Rated Current	S. R. F
	μH	±	Max	Min	mA	MHZ
PMAF1608-100K	10	10%	2.55	30	15	17

- ◎ 規格參數基於環境溫度25°C取得
All test Data is referenced to 25°C ambient
- ◎ 電感工作環境溫度：-25°C ~ 125°C
Operating temperature range -25 °C to +125 °C
- ◎ 設計時，請遵循規格書所示參數，並適當留有餘量
The design should follow the parameters shown in the specification and leave a proper margin
- ◎ 務必考慮最終的產品設計，元器件佈局，線路板走線，以及使用環境過程中，電感最終溫度不得超過125°C
The operating temperature of inductance do not exceed 125°C
- ◎ 參考产品开发设计实测尺寸，感值，DCR等数据，请参考规格书第6页
The Dimension, Inductance, DCR test data is on page 6
- ◎ 使用電感時，請查閱第7頁注意事項
The announcements is on page 8

Page 3 / 8



譜羅德電子科技（深圳）有限公司
PROD TECHNOLOGY CO., LTD.

深圳市寶安區石岩三聯工業區B棟311

更多规格请访问谱罗德官方网站
下载或者扫描二维码通过微信小程序
获取

<http://www.prodtech.cn/>



產品編碼 P/N	PMAF1608-100K	測試設備 TEST INSTRUMENT	Zentech-3305 / Zentech502BC
產品系列 Series	Multilayer Chip Ceramic Inductor	測試頻率 TEST FREQUENCY	2MHZ / 0.06V

電感結構
Inductor Structure

電感結構如圖1所示，電感構造如圖2圖3所示：
The inductance structure is shown in FIG. 1 The inductance structure is shown in FIG. 2 and FIG. 3

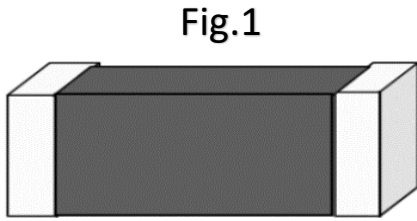


Fig.1

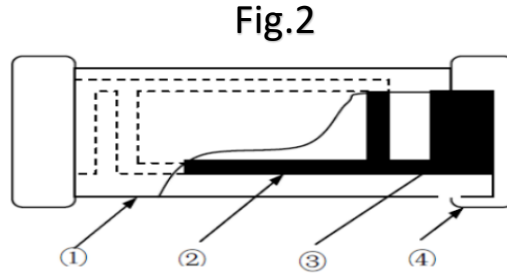


Fig.2

- ① Ceramic
- ② Inner Coil
- ③ Pull out Electrode
- ④ terminal Electrode


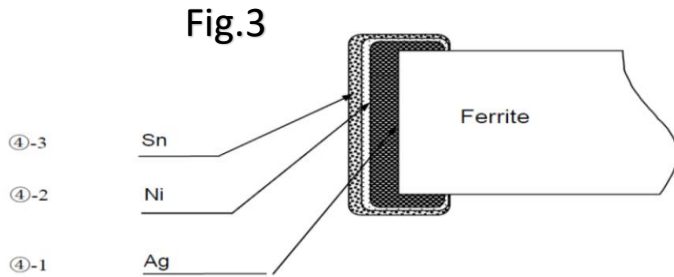


Fig.3

焊接溫度（推荐）

Recommended Soldering Temperature Graph

TEMPERATURE (°C)

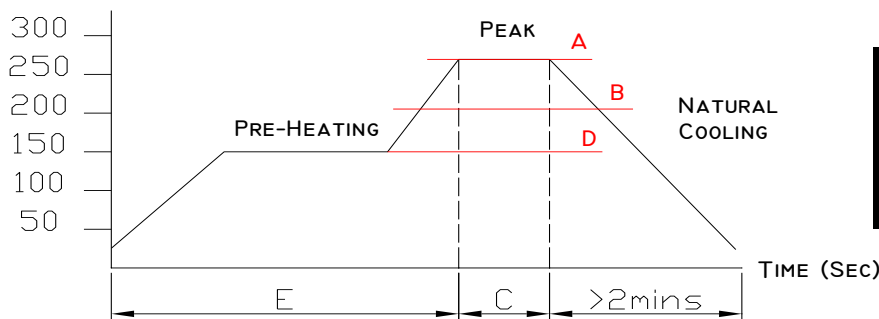

A	260°C
B	230°C
C	10 Sec
D	150°C
E	60~240 Sec




產品編碼 P/N	PMAF1608-100K	測試設備 TEST INSTRUMENT	Zentech-3305 / Zentech502BC
產品系列 Series	Multilayer Chip Ceramic Inductor	測試頻率 TEST FREQUENCY	2MHZ / 0.06V

載帶卷盤尺寸 : (mm)

Packing Dimension



MPQ	A	B	P	T
4000pcs/卷盤	0.065±0.1	1.15±0.1	2.0±0.05	0.8 Max

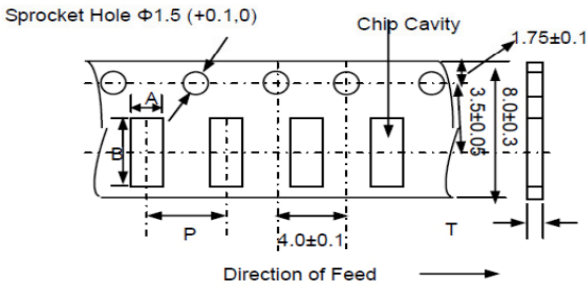

載帶剝離力:

Typical Pulling Force


20~120 gf

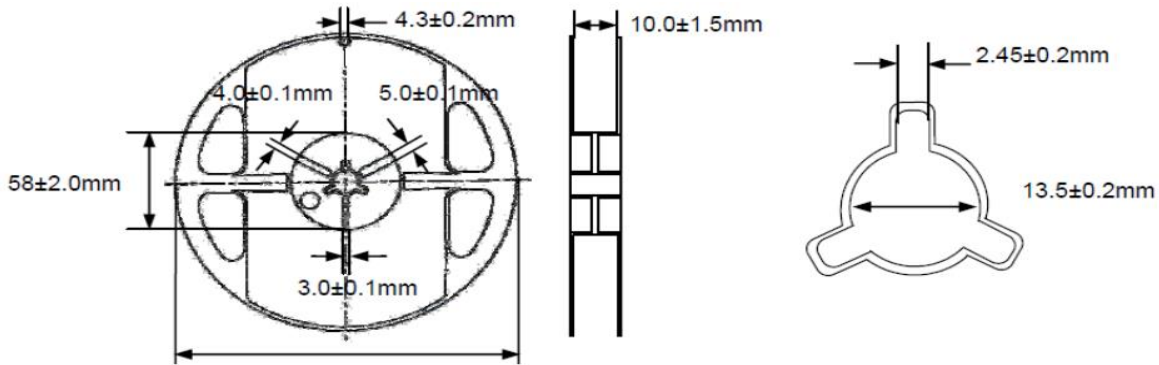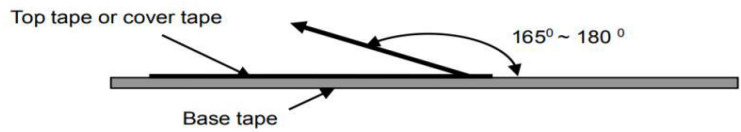



裝箱數量:

Package Quantity

4000pcs/卷盤
4000pcs/Reel



20000pcs/每盒
20000pcs/ Middle box



100000pcs/每箱
100000pcs/ Outer box

◎ 實際出貨過程，依據客戶需求狀況的不同，包裝數量會有變化，最終的包裝數量請參照實際出貨包裝

In the actual delivery process, the package quantity will change according to the different customer demands. Please refer to the actual shipment quantity for the final package quantity



測試數據

TEST REPORT



產品編碼 P/N	PMAF1608-100K	測試設備 TEST INSTRUMENT	Zentech-3305 / Zentech502BC
產品系列 Series	Multilayer Chip Ceramic Inductor	測試頻率 TEST FREQUENCY	2MHZ / 0.06V

測試數據

Test Date

序號	尺寸測試數據 Dimension Test Date			特性測試數據 Characteristics Test Date		
	L	W	T	DCR	Lo	Judge
	mm	mm	mm	Ω	μH±10%	
	1.60±0.15	0.80±0.15	0.80±0.15	2.55	10.00	
1	1.61	0.81	0.81	2.03	10.11	PASS
2	1.60	0.83	0.83	2.02	9.98	PASS
3	1.61	0.82	0.83	2.03	9.96	PASS
4	1.61	0.83	0.82	2.06	10.03	PASS
5	1.62	0.83	0.84	2.03	10.07	PASS
6	1.62	0.82	0.82	2.01	10.06	PASS
7	1.62	0.83	0.83	2.05	10.08	PASS
8	1.61	0.82	0.83	2.06	10.02	PASS
9	1.63	0.83	0.83	2.03	9.98	PASS
10	1.62	0.83	0.84	2.03	10.03	PASS
平均值	1.62	0.83	0.83	2.04	10.03	

◎ 所有测试数据基于环境温度25℃取得
All test Data is referenced to 25℃ ambient



譜羅德電子科技（深圳）有限公司
PROD TECHNOLOGY CO., LTD.

深圳市寶安區石岩三聯工業區B棟311

更多规格请访问谱罗德官方网站
下载或者扫描二维码通过微信小程序
获取

<http://www.prodtech.cn/>





注意事項

使用本產品時，請注意以下事項

- ◎ 產品保存期限為12個月，保存條件：溫度5~40℃，濕度10~75%RH以內，超過保存期限可能會使產品端子電極發生氧化。
- ◎ 請勿在極端環境下使用和保存（高鹽，強酸，強鹼，強輻射等）。
- ◎ 產品焊接前，請進行預熱；預熱溫度與焊接溫度之間溫差建議控制在150℃以內。
- ◎ 產品焊接後需重新拆卸焊接修正時，請遵循規格書規定的條件範圍；過高的加熱溫度以及反復的拆卸可能會導致產品失效。
- ◎ 產品請勿接觸清洗劑，酒精等液體，這會侵蝕產品本體，從而導致產品失效。
- ◎ 產品焊接到線路板後，請注意不可因線路板整體變形或局部變形而施加給電感剩餘應力，這可能會導致電感發生破裂，脫落，以致失效。
- ◎ 產品通電後溫度會隨電流的增大而上升，設計時請務必考慮留有餘量。
- ◎ 過高的靜電會對產品產生永久性損害，請注意靜電防護。
- ◎ 產品通電過程請勿觸摸產品任何部位，防止觸電。
- ◎ 本產品作為磁性產品，設計時請務必考慮周邊元器件與本產品可能產生的相互影響。
- ◎ 本產品適用於一般電子設備，如：AV設備，通信設備，家電產品，娛樂設備，電腦設備，個人設備，辦公設備，計測設備，工業機器人等。且該一般電子設備需在常規的操作和使用方法環境下使用。對於需要高度安全性和可靠性的，或者因本產品失效造成設備故障，誤操作，運轉不良等危及到人的生命身體及財產安全，以及對社會產生較大不良影響的特殊用途，設計使用前務必同本公司溝通，設計使用者如在未取得我司書面同意狀況下使用造成任何後果，我司不予承擔。特殊用途包含但不限定如下清單：

- | | |
|-----------------------|------------------|
| 1 軍用設備 | 8 關係到國防安全的設備 |
| 2 運輸設備（汽車，軌道交通產品，船舶等） | 9 防災賑災設備 |
| 3 航空，航太設備 | 10 各種安規設備 |
| 4 發電控制設備 | 11 其他被認定為特殊用途的設備 |
| 5 核動力相關設備 | |
| 6 爆炸引燃控制設備 | |
| 7 交通控制設備 | |





ANNOUNCEMENTS

Please read this before using the product.

- © The product storage life is 12 months, Storage Temperature: TEMP.5~40°C; RH10%~75%. Please use the product within the warranty period
- © Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, radiation etc.) .
- © Before soldering, be sure to preheat components:The preheating temperature should be set so that The temperature difference between the solder temperature and chip temperature does not exceed 150° C.
- © Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur. Repeated disassembly may invalidate the inductance
- © The cleaning agent can not be used for these products. This may corrode the inductor
- © When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- © Self heating (Rated Current or Irms) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- © Too high static electricity will cause permanent damage to the product, please pay attention to electrostatic protection.
- © As a magnetic product, the design must consider the possible interaction between peripheral components and the product.
- © The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us. Otherwise, our

- | | |
|--|--|
| 1 Military equipment | 8 Medical equipment |
| 2 Transportation equipment (cars, trains, ships, etc.) | 9 Disaster prevention/crime prevention equipment |
| 3 Aerospace/aviation equipment | 10 Safety equipment |
| 4 Power-generation control equipment | 11 Other applications that are not considered general-purpose applications |
| 5 Atomic energy-related equipment | |
| 6 Explosive ignition control equipment | |
| 7 Transportation control equipment | |

