


DATASHEET

SMD • B 19-223/S2BHC-A01/2T



Features

- . Package in 8mm tape on 7["] diameter reel.
- . Compatible with automatic placement equipment.
- . Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.
- . Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm)

Description

- . The 19-223 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- . Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- . Backlighting in dashboard and switch.
- . Telecommunication: indicator and backlighting in telephone and fax.
- . Flat backlight for LCD, switch and symbol.
- . General use.

Device Selection Guide

Code	Chip Materials	Emit	ed Color	Resin Color		
S2	AlGaInP	Brillia	ant Orange	- Water Clear		
ВН	InGaN	Blue		Water Clour		
Absolute Maximum Ra	atings (Ta=25°C)					
Parameter	Symbol	Code	Rating	Unit		
Forward Current	lf	S2	25	_		
		BH	20	mA		
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	S2	50			
		BH	40	mA		
Power Dissipation	Pd	S2	60			
		вн	75	mW		
Electrostatic Discharge	ESDHBM	S2	2000			
		ВН	150	V		
Operating Temperature	T _{opr}		-40 ~ +85	°C		
Storage Temperature	Tstg		-40 ~ +90	°C		
Soldering Temperature	Tsol			Reflow Soldering : 260 $^\circ\!C$ for 10 sec. Hand Soldering : 350 $^\circ\!C$ for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Code	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	S2	72.0		140.0	- mcd	
		BH	36.0		72.0		
Viewing Angle	20 1/2			120		deg	_
Peak Wavelength	λр	S2		611		- nm	_ I⊧=20mA _
		BH		468			
Dominant Wavelength	λd	S2		605		- nm	
		BH		470			
Spectrum Radiation Bandwidth	$ riangle \lambda$	S2		17		- nm	
		BH		25			
Forward Voltage	VF	S2	1.7	2.0	2.4	- V	
		BH	3.0		3.5		
Reverse Current	I _R	S2			10	- μΑ	V _R =5V
		ВН			50		

Note:

1. Tolerance of Luminous Intensity: ±11%

2.Tolerance of Forward Voltage: ±0.1V

3.Reverse Voltage(VR) Condition is applied to IR test only The device is not designed for reverse operation

S2 Bin Range of Luminous Intensity


		- /			
Bin Code	Min.	Max.	Unit	Condition	
Q1	72.0	90.0			
Q2	90.0	112.0	mcd	I _F =20mA	
R1	112.0	140.0			
BH Bin Range of	Luminous Intensi	ty			
Bin Code	Min.	Max.	Unit	Condition	
N2	36.0	45.0			
P1	45.0	57.0	mcd	I _F =20mA	
P2	57.0	72.0			
Bin Range of	Forward Voltge				
Bin Code	Min.	Max.	Unit	Condition	
1.	3.00	3.15			
2.	3.15	3.30	V	I _F =20mA	
3.	3.30	3.50			
Nata					

Note:


1.Tolerance of Luminous Intensity: ±11%

2. Tolerance of Forward Voltage: ±0.1V


Typical Electro-Optical Characteristics Curves S2

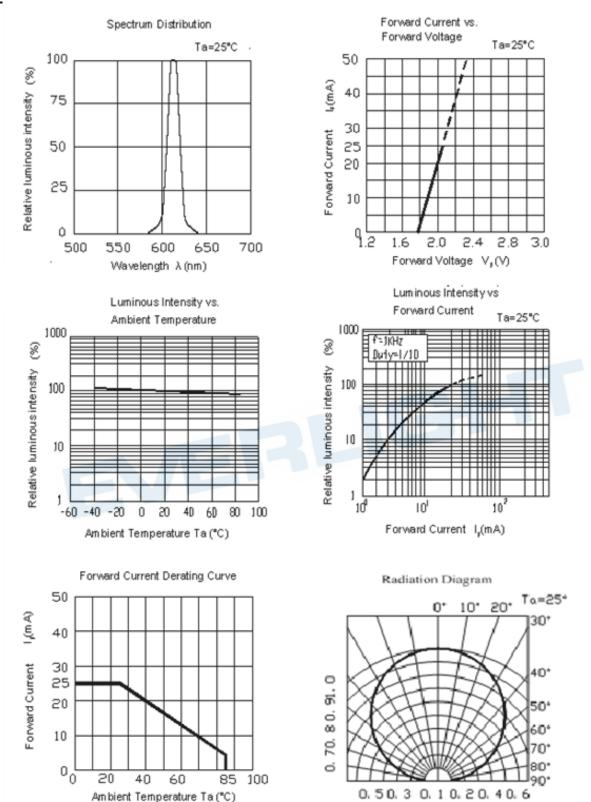

Typical Electro-Optical Characteristics Curves BH

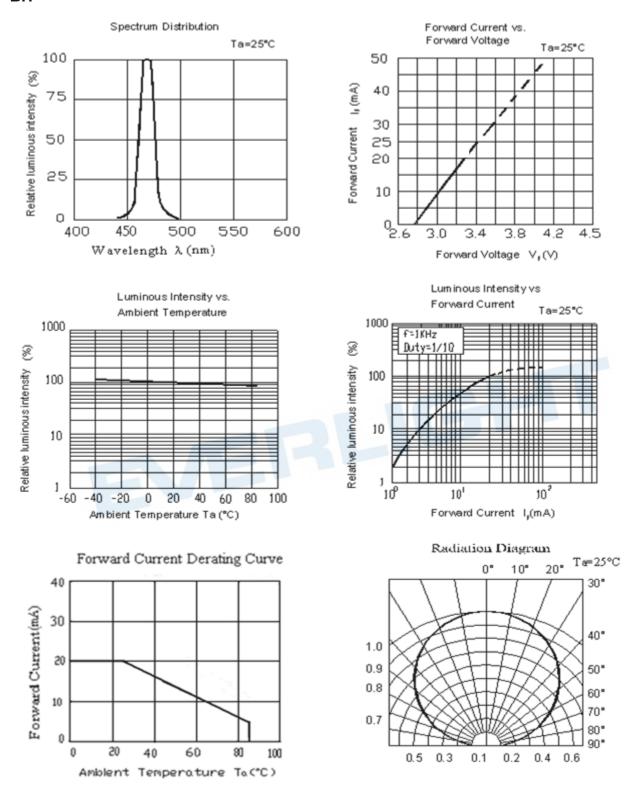


Package Dimension

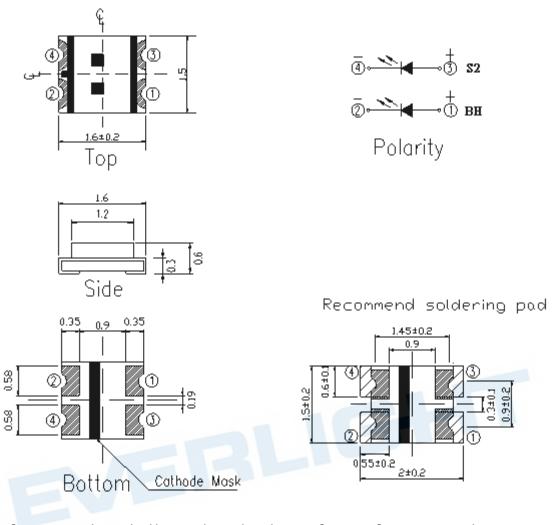


Suggested pad dimension is just for reference only. Please modify the pad dimension based on individual need. Note: Tolerances unless mentioned ±0.1mm. Unit = mm

Moisture Resistant Packing Materials Label Explanation




Reel Dimensions

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

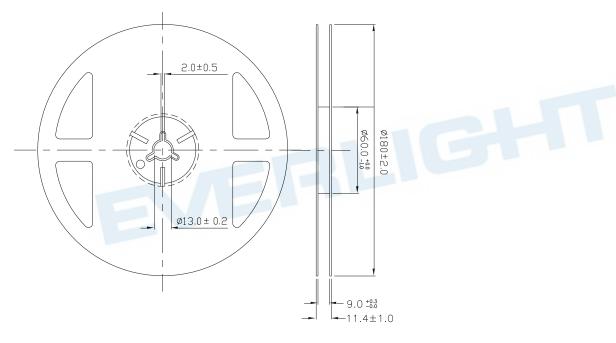


Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

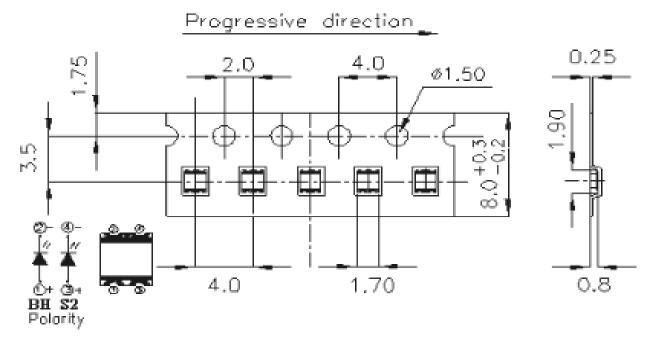

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm **Moisture Resistant Packaging**

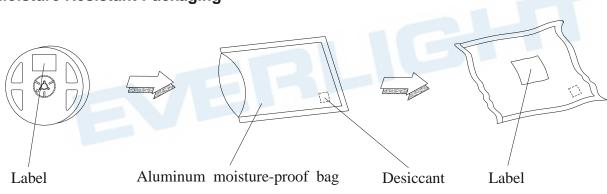




Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 After opening the package: The LEDs should be kept at 30 $^\circ\!C$ $\,$ or less and 60%RH or less.
- $2.3 \ \mbox{The LEDs}$ should be used within 168 hours (7days) after opening the package .
- If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

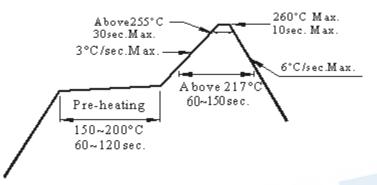

3.2 Reflow soldering should not be done more than two times.


- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.





Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.



DISCLAIMER

- 1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
- 2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
- 3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
- 4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
- 6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.

