

Description

YTLD1950C is a high performance duplexer designed for applications in LTE Band1 (1920~1980 MHz UL, 2110~2170 MHz DL).

YTLD1950C is designed with ROFS's MEMS BAW technology, which provides high-Q resonator and first-class reliability. Low insertion loss and high power handling capability of Tx port reduces the current from power amplifier under working condition. High isolation of Rx port improve excellent sensitivity in the receive band .


YTLD1950C uses chip scale packaging (CSP) technology to assembly the filters into a molded chip-on-board module with the footprint of 1.8mm x 1.4mm and height of 0.61mm.

Features

- Miniature Size
1.8 mm x 1.4 mm x 0.61 mm
- Insertion Loss:
 - Tx 1.3 dB Typ.
 - Rx 1.5 dB Typ.
- Tx-RX Isolation:
 - Tx Pass Band 53 dB Typ.
 - Rx Pass Band 60 dB Typ.
- Tx Input Power
 - 31 dBm
- ESD protection ability: Class1C
- Moisture Sensitivity: MSL3
- Storage Temperature: -40 to +85 °C


Environmental

- Full implement with RoHS compliant
- Lead Free (Pb free)

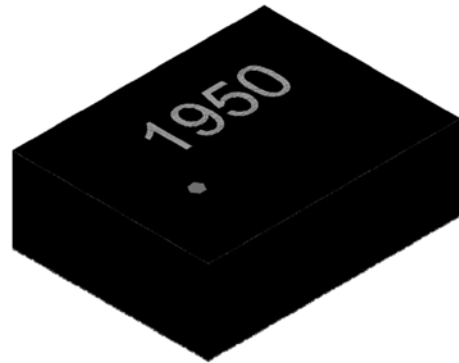

8 Pin 1.8 x 1.4 x 0.61mm Package

Functional Block Diagram (Top Thru View)

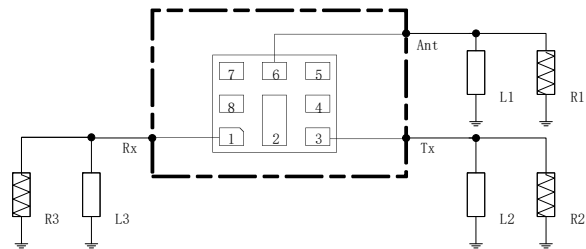

Reference Des.	Value	Description
R1	50ohm	
R2	50ohm	
R3	50ohm	
L1	2.7 nH	Ideal Inductor
L2	8.2 nH	Ideal Inductor
L3	3.9 nH	Ideal Inductor

Pin Connection

No.	Function
1	Rx
3	Tx
6	Ant
2,4,5,7,8	Ground



Electrical Specification

Transmit Port to Antenna Port

Parameter (Operation Temperature: -20~85°C)	Min	Typ*	Max	Unit
Insertion Loss (1920~1980MHz)	/	1.3	2.0	dB
Ripple (1920~1980MHz)	/	0.4	1.0	dB
VSWR (1920~1980MHz, <i>ANT Port</i>)	/	1.2	1.8	/
VSWR (1920~1980MHz, <i>TX Port</i>)	/	1.3	1.8	/
Absolute Attenuation (500~8000MHz)				
(500~1560MHz)	32	37	/	dB
(1565 ~1606MHz)	34	39	/	dB
(1805~1880MHz)	26	31	/	dB
(2010~2025MHz)	20	28	/	dB
(2110~2170MHz)	49	54	/	dB
(2300~2400MHz)	36	41	/	dB
(2400~2483MHz)	33	38	/	dB
(2620~2690MHz)	30	35	/	dB
(3400~3800MHz)	20	26	/	dB
(3840~3960MHz, <i>2fo</i>)	20	25	/	dB
(4400~5400MHz)	10	19	/	dB
(5760~5940MHz, <i>3fo</i>)	19	24	/	dB
(6000~7000 MHz)	16	23	/	dB



Antenna Port to Receive Port

Parameter (Operation Temperature: -20~85°C)	Min	Typ*	Max	Unit
Insertion Loss (2110~2170MHz)	/	1.5	2.1	dB
Ripple (2110~2170MHz)	/	0.6	1.2	dB
VSWR (2110~2170MHz, ANT Port)	/	1.3	1.9	/
VSWR (2110~2170MHz, RX Port)	/	1.4	1.9	/
Absolute Attenuation (500~8000MHz)				
(500~1680MHz)	29	34	/	dB
(1710~1785MHz)	32	37	/	dB
(1920~1980MHz)	46	51	/	dB
(2300~2400MHz)	46	51	/	dB
(2400~2500MHz)	47	52	/	dB
(2500~2570MHz)	51	56	/	dB
(3300~4200MHz)	33	38	/	dB
(4220~4340MHz, 2f0)	38	43	/	dB
(4400~5900MHz)	15	22	/	dB
(6330~6510MHz, 3f0)	29	34	/	dB
(6600~8000 MHz)	6	12	/	dB

Transmit Port to Receive Port

Parameter(Operation Temperature: -20~85°C)	Min	Typ*	Max	Unit
Isolation				
1920~1980MHz	50	53	/	dB
2110~2170MHz	55	60	/	dB

*Data is the integrated value of the linear s-parameter over indicated band

* Typical value at 25±3 °C



Typical Performance at Tc=25°C

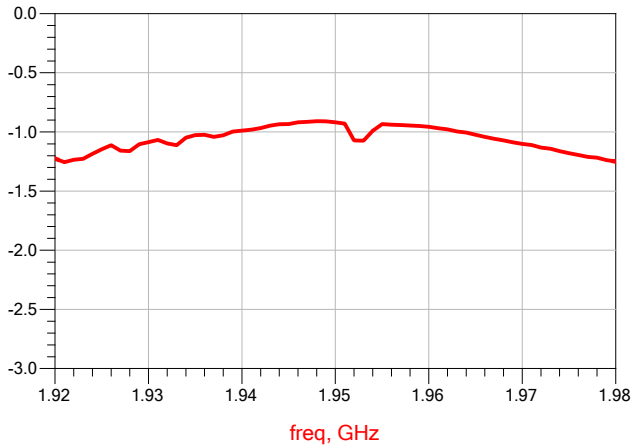


Figure1. TX-ANT Passband

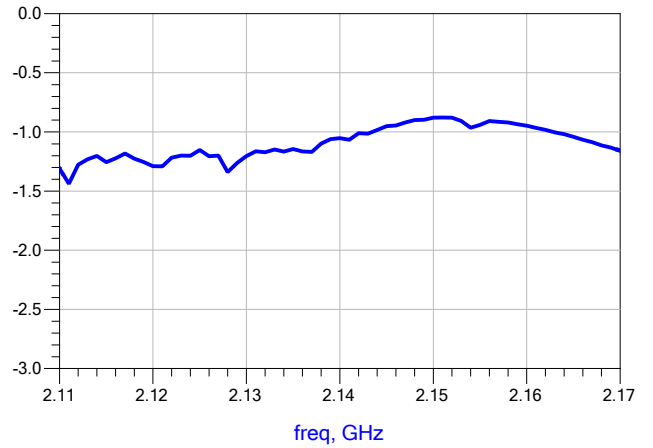


Figure2. ANT-RX Passband

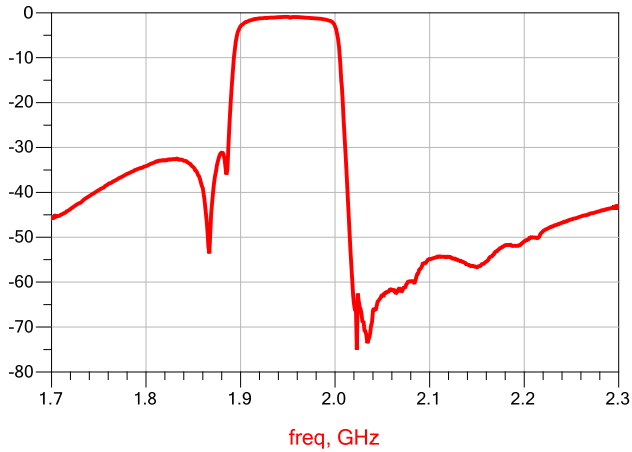


Figure3. TX-ANT

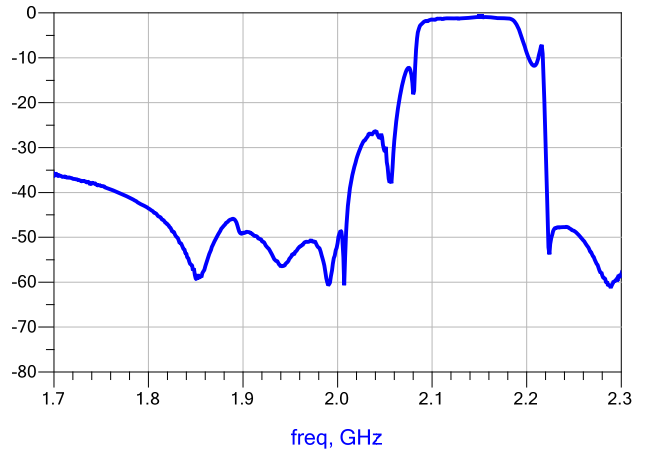


Figure4. ANT-RX

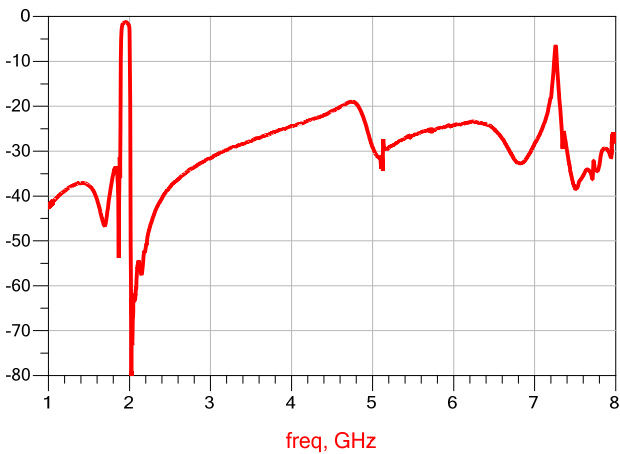


Figure5. TX-ANT Wideband

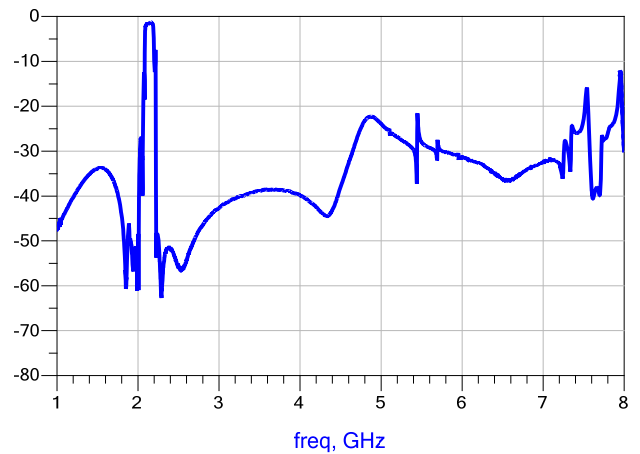


Figure6. ANT-RX Wideband



Typical Performance at Tc=25°C

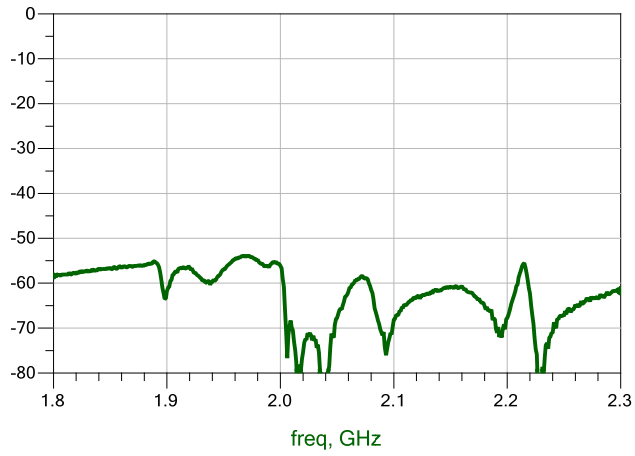


Figure7. TX - RX Isolation



Typical Performance at Tc=25°C

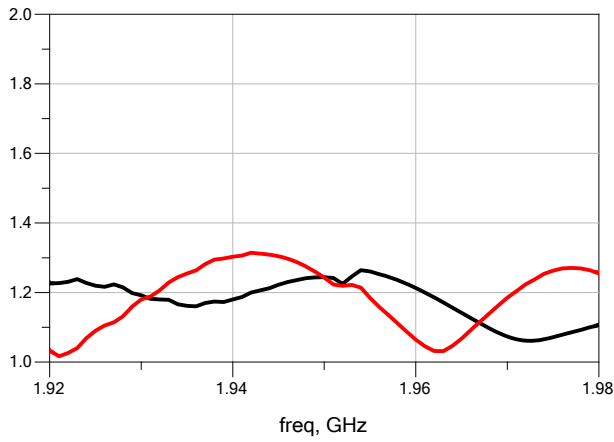


Figure8. TX (Tx/Ant Port)VSWR

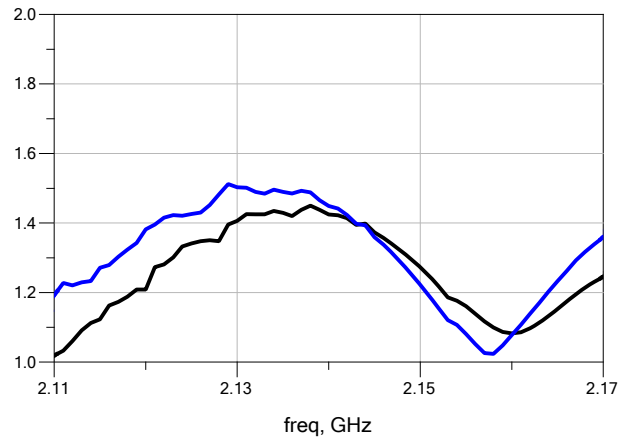


Figure9. RX (RX/Ant Port) VSWR

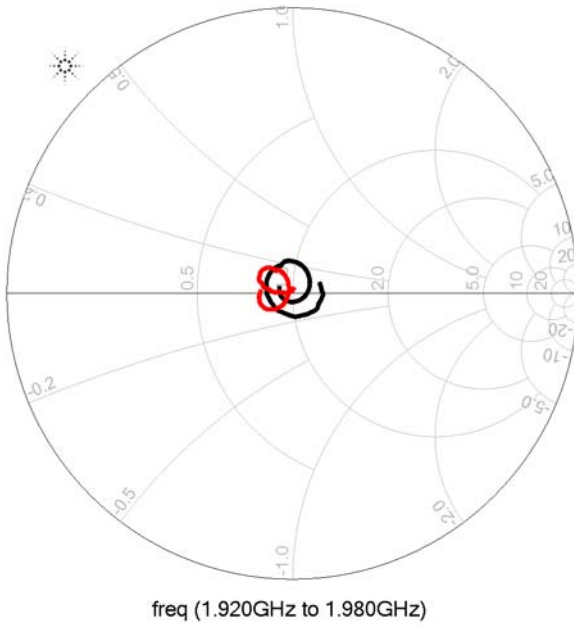


Figure10. TX (Tx/Ant Port)Smith Chart


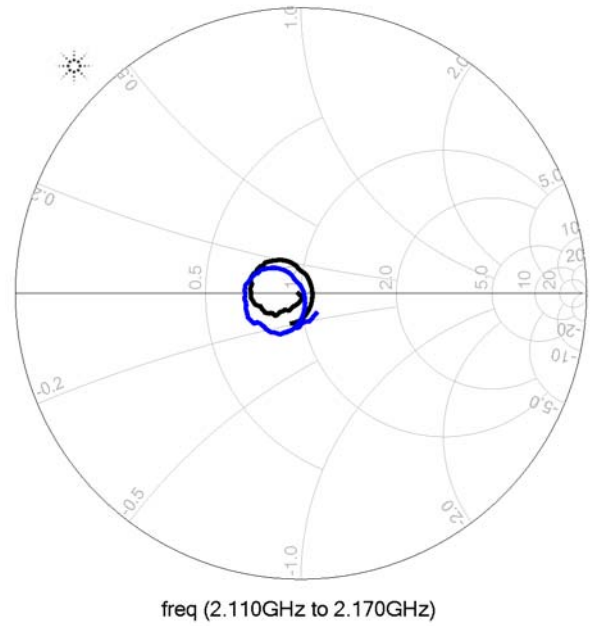



Figure11. RX (RX/Ant Port) Smith Chart




Package Outline

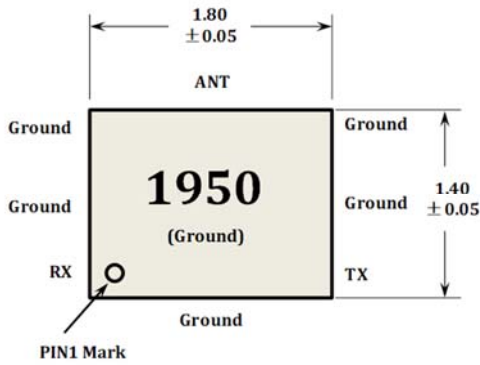

Top View



Side View

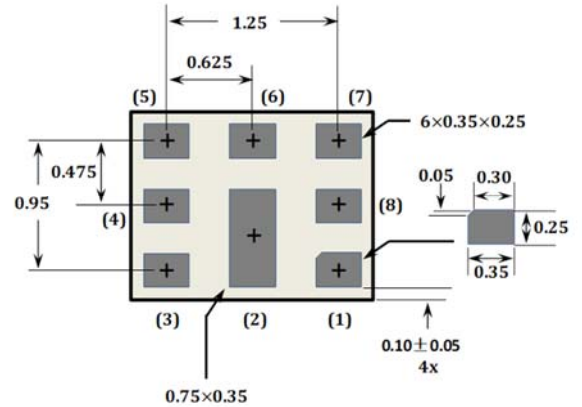

Bottom View

Note:

1. Dimension: mm
2. Dimensions nominal unless otherwise noted
3. Contact area are gold plated
4. Pad(1)(2) is single size, others are same size
5. 1950 is product code

No.	Function
1	Rx
3	Tx
6	Ant
2,4,5,7,8	Ground


Order Information

P/N	Qty./Reel	Container
YTLD1950C	4000	7 inch Reel



Packing


1. Tape Dimension

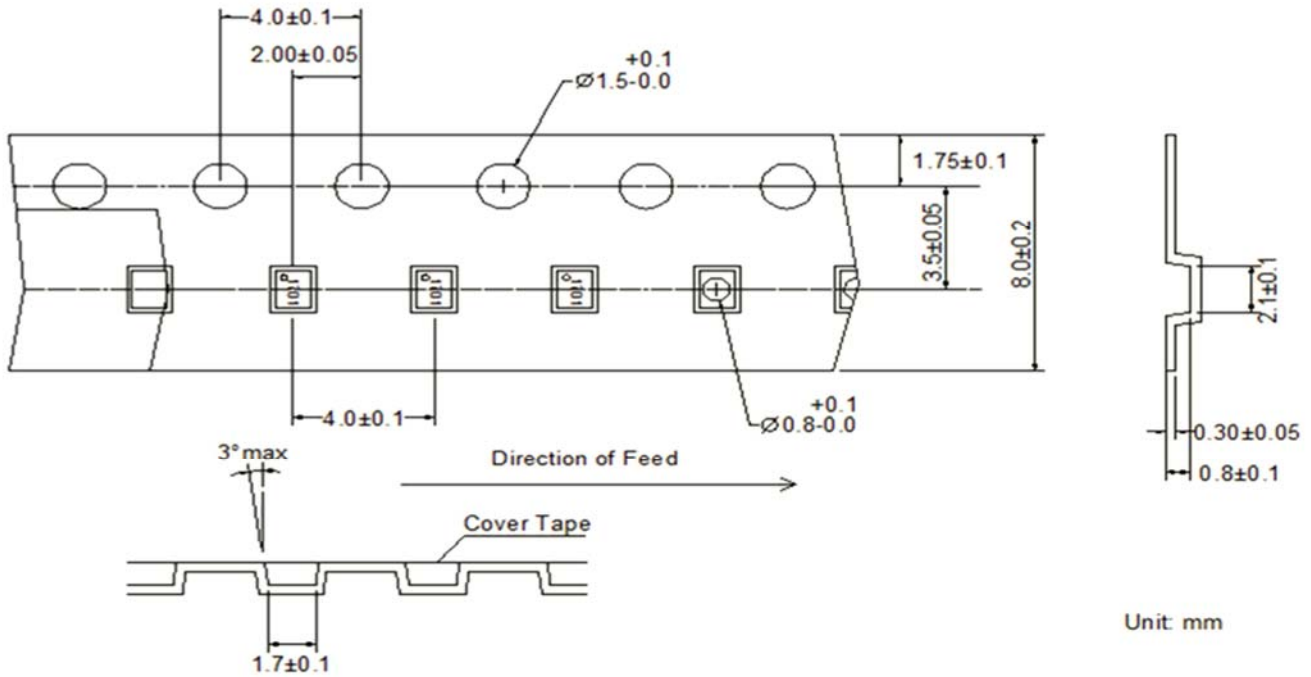


Unit: mm

2. Reel Dimension

4000Pcs/Reel

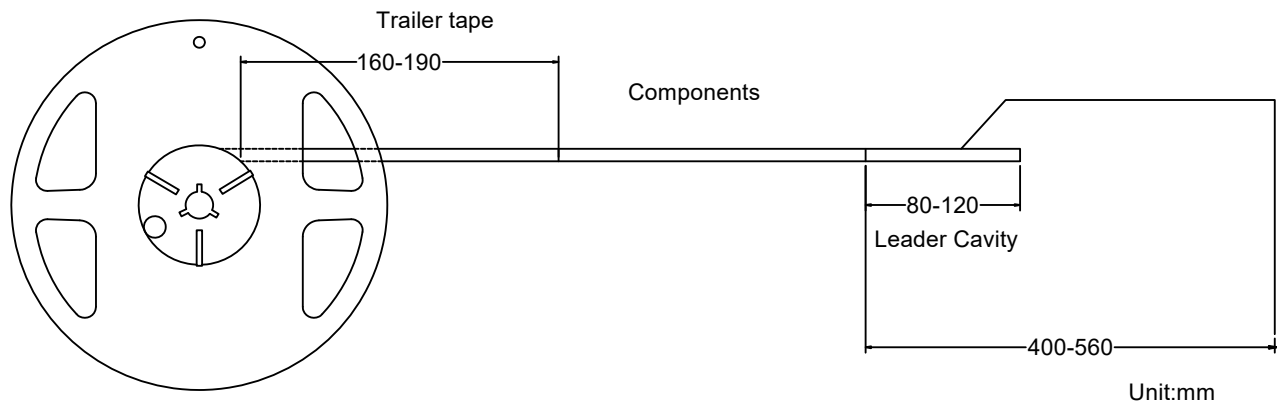

Unit:mm

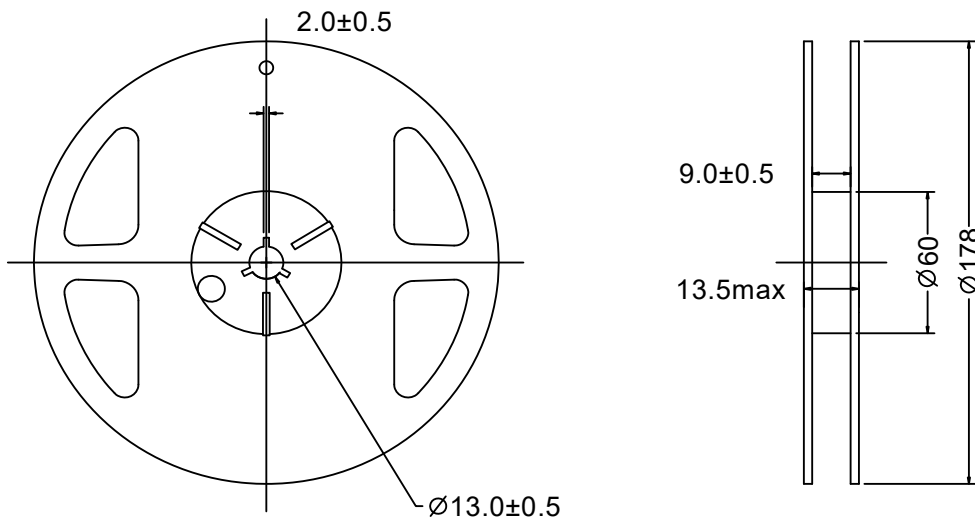

Recommended Reflow Profile

