



# K32 THRU K310

## 3.0 AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

### FEATURES

- \* Ideal for surface mount applications
- \* Easy pick and place
- \* Built-in strain relief
- \* Low forward voltage drop

### MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Metallurgically bonded construction
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any


### VOLTAGE RANGE

20 to 100 Volts

### CURRENT

3.0 Ampere

#### SOD123FL

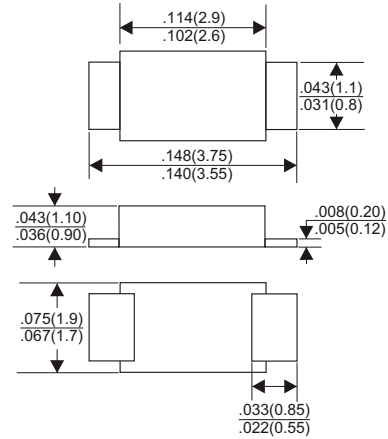

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
 Single phase half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

TYPE NUMBER	K32	K33	K34	K35	K36	K38	K39	K310	UNITS	
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	90	100	V	
Maximum RMS Voltage	14	21	28	35	42	56	63	70	V	
Maximum DC Blocking Voltage	20	30	40	50	60	80	90	100	V	
Maximum Average Forward Rectified Current										
At T <sub>L</sub> =100°C									3.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)									80	A
Maximum Instantaneous Forward Voltage at 3.0A	0.55		0.70		0.85				V	
Maximum DC Reverse Current	Ta=25°C				0.2				mA	
at Rated DC Blocking Voltage	Ta=100°C				20				mA	
Typical Junction Capacitance (Note1)									300	pF
Typical Thermal Resistance R <sub>JL</sub> (Note 2)									10	°C/W
Operating Temperature Range T <sub>J</sub>	-65 — +125				-65 — +150				°C	
Storage Temperature Range T <sub>STG</sub>	-65 — +150								°C	

#### NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Lead.

## RATING AND CHARACTERISTIC CURVES (K32 THRU K310)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

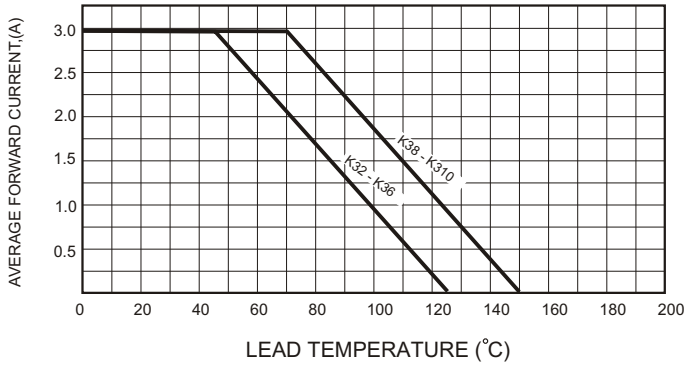


FIG.2-TYPICAL FORWARD CHARACTERISTICS

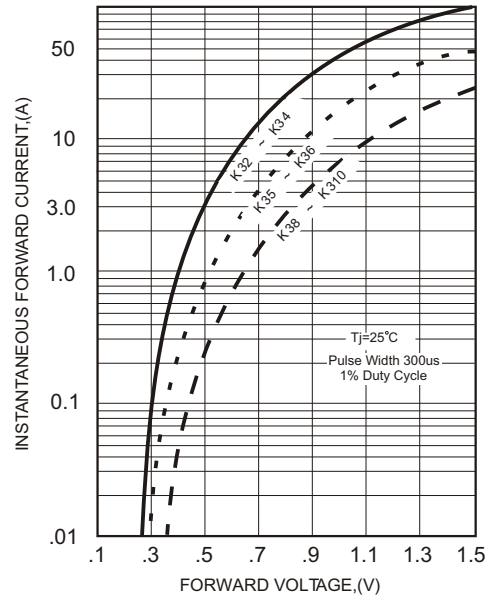


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

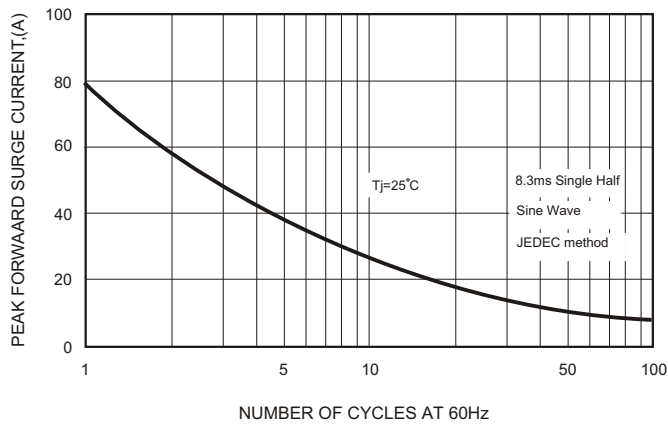


FIG.4-TYPICAL JUNCTION CAPACITANCE

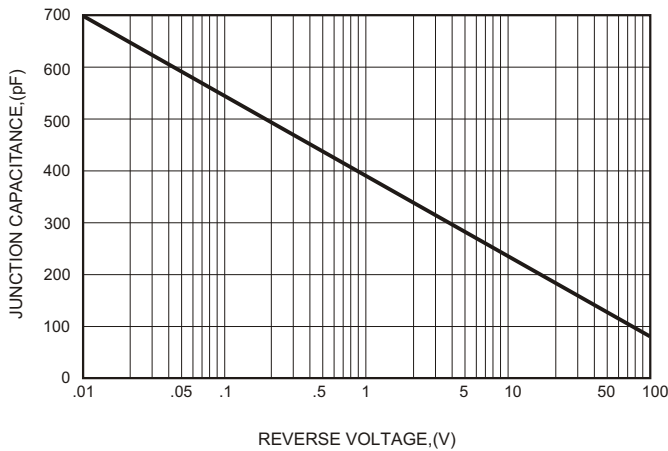


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

