


Version: 1.1 Document code: HB-WI7.3-391-2020 Effective date : 2020-08-31 Page: 1 of 4


SMD1812-200C-30V

RoHS 📚

	Resettable over current and	over te	•	Low resistance	
	Small size of 1812				Fast time-to-trip
	Small footprint			•	RoHS complaint
lic	cation				
	Computer	•	Industrial controls	•	Multimedia
	Battery		Automotive	<b>•</b>	Game machines
•	Mobile phones	•	Portable electronics	۲	Telephony and broadband
	lumbering				



## **Product Dimensions in Millimeter**



Part Number		Α	В		С		D		E	
	Min	Max	Min	Мах	Min	Max	Min	Max	Min	Мах
SMD1812-200C-30V	4.37	4.73	3.07	3.41	0.60	1.50	0.30		0.25	

## **Electrical Characteristics**

	I(A	A)	V <sub>max</sub>	I <sub>max</sub>	$\mathbf{Pd}_{typ}$	T <sub>trip</sub>		R <sub>min</sub>	R <sub>1max</sub>
Part Number	25	°C				<b>25</b> ℃		<b>25</b> ℃	
	Hold	Trip	(V)	(A)	(W)	Current(A)	Time(S)	(Ω)	<b>(</b> Ω)
SMD1812-200C-30V	2.0	4.0	30.0	40	0.8	8.0	2.0	0.020	0.120

Polymer PTC Thermistor

Specifications are subject to change without notice



#### Surface-Mount Device

#### SMD1812-200C-30V

RoHS 📚

I<sub>H</sub>=Hold current: maximum current at which the device will not trip at  $25^{\circ}$ C still air reflow soldering of  $260^{\circ}$ C for 20 sec. I<sub>T</sub>=Trip current: minimum current at which the device will always trip at  $25^{\circ}$ C still air reflow soldering of  $260^{\circ}$ C for 20 sec. V<sub>max</sub>=Maximum continuous voltage device can withstand without damage at rated current

Imax=Maximum fault current device can withstand without damage at rated voltage.

 $T_{trip}$ =Maximum time to trip(s) at assigned current reflow soldering of 260  $^\circ$ C for 20 sec.

Pd<sub>typ</sub>=Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R<sub>min</sub>= Minimum resistance of device in initial (un-soldered) state.

 $R_{1max}$ =Maximum resistance of device at 25 °C measured one hour after reflow soldering of 260 °C for 20 sec.

Value specified is determined by using the PWB with 0.030 '\*1.5oz copper traces.

Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.


#### **Environmental Specifications**

Test	Test Conditions	Accept /Reject Criteria
Recommended storage conditions	40°C max, 70% R.H. max	No change
Passive aging:	85°C, 1000 hours	≤ R <sub>1max</sub>
Moisture Resistance	85% RH,85℃,1000hrs	≤ R <sub>1max</sub>
Thermal Shock	MIL-STD-202 Method 107G +85°C /-40°C 20 times	≤ R <sub>1max</sub>
Vibration	MIL-STD-883C, Method 2007.1, Condition A	No change
Solvent Resistance	MIL-STD-202, Method 215	No change
Moisture Level Sensitivity	Level 1, J-STD-020C	No change

#### Thermal Derating [Hold Current (A) at Ambient Temperature (°C)]

Dart Number	Maximum Ambient Operating Temperature ( $^\circ\!\mathbb{C}$ )								
Part Number	-40	-20	0	25	40	50	60	70	85
SMD1812-200C-30V	2.88	2.61	2.25	2.00	1.80	1.66	1.45	1.09	0.80

#### Solder Reflow Recommendation

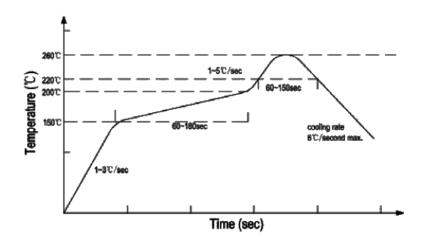

#### Reflow -- curve



#### Surface-Mount Device

#### SMD1812-200C-30V

RoHS 🏷

Recommended reflow methods:IR,hot air oven ,nitrogen oven


Devices can be cleaned using standard industry methods and solvents.

#### NOTE:

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame

## Packaging Quantity and Marking

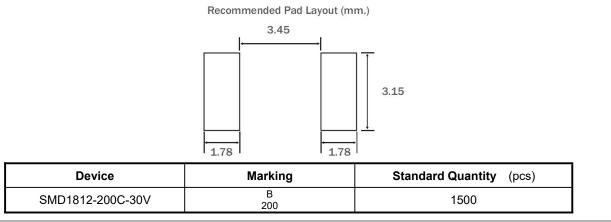

### Tape Specifications:EIA-481-1(mm)

Governing Specifications	SMD1812-200C-30V			
W	$12.0 \pm 0.3$			
F	$5.5 \pm 0.05$			
<b>E1</b>	$1.75 \pm 0.1$			
D0	$1.55 \pm 0.05$			
D1	1.55min			
PO	$4.0 \pm 0.1$			
P1	8.0±0.1			
P2	$2.0 \pm 0.05$			
A0	$3.58 \pm 0.1$			
B0	4.93±0.1			
Т	$0.2 \pm 0.1$			
KO	$1.25 \pm 0.1$			
Leader min	390			
Trailer min	160			






#### SMD1812-200C-30V

RoHS 📚

### Reel Dimensions:EIA-481-1(mm)

Governing Specifications	EIA481-1
С	Φ178±1.0
D	$\Phi 60.2 \pm 0.5$
Н	$16.0 \pm 0.5$
W	$13.2 \pm 1.5$



#### NOTE:

BNstar Co.,Ltd. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of

BNstar's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. BNstar Co.,Ltd., reserves the right to discontinue or make changes to its products at any time without notice.

#### Website: http://www.bnstar.net

For additional information, please contact your local Sales Representative. ©Copyright 2006, BNstar Co.,Ltd.

# CAUTION:

Operation beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame. The devices are intended for protection against occasional over-current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated. Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.

### **Contact information**

BNSTAR NEW MATERIALS CO., LTD. 130Meilong Road Shanghai, P.R.China Tel:86-021-64251576 Fax: 86-021-64250020 EMAIL: info@bnstar.net

Rev. letter		Date	
Design	Check	Audit	Approve