

Features


- Compatible with all I²C bidirectional data transfer protocol
- Memory array:
 - 16K bits (2048 X 8) of EEPROM
 - Page size: 16 bytes
- Single supply voltage and high speed:
 1 MHz
- Random and sequential Read modes
- Write:
- Byte Write within 3 ms
- Page Write within 3 ms

- Partial Page Writes Allowed
- Write Protect Pin for Hardware Data Protection
- Schmitt Trigger, Filtered Inputs for Noise
 Suppression
- High-reliability
 - Endurance: 1 Million Write CyclesData Retention: 100 Years
- Enhanced ESD/Latch-up protection
- 8-lead PDIP/SOP/TSSOP/ UDFN/SOT23-5 and TSOT23-5 packages

Description

- The BL24C16F provides 16384 bits of serial electrically erasable and programmable read-only memory (EEPROM), organized as 2048 words of 8 bits each.
- The device is optimized for use in many industrial and commercial applications where low-power and low-voltage operation are essential.

Pin Configuration

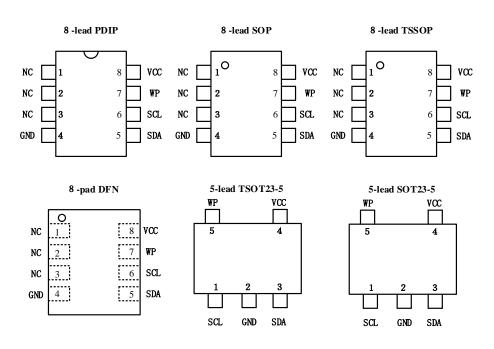

Pin Descriptions

 Pin Name 	– Туре	 Functions
– SDA	– I/O	 Serial Data
– SCL	– 1	 Serial Clock Input
– WP	-	 Write Protect
– GND	– P	– Ground
- Vcc	– P	 Power Supply

Table 1

Vec -GND-WP SCL START STOP LOGIC SDA EN HIGH VOLTAGE PUMP/TIMING SERIAL CONTROL LOGIC LOAD DATA RECOVERY ССМР DEVICE ADDRESS COMPARATOR LOAD INC DECODER DATA WORD ADRESS COUNTER EEPROM Y DECODER SERIAL MUX DIN DOUT/ACKNOWLEDGE DOUT

Block Diagram

Figure 1

_ _ _ _ _ _

_ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _



SERIAL DATA (SDA): The SDA pin is bi-directional for serial data transfer. This pin is open-drain driven and may be wire-ORed with any number of other open-drain or open- collector devices.

SERIAL CLOCK (SCL): The SCL input is used to positive edge clock data into each EEPROM device and negative edge clock data out of each device.

WRITE PROTECT (WP): The BL24C16F has a Write Protect pin that provides hardware data protection. The Write Protect pin allows normal read/write operations when connected to ground (GND). When the Write Protection pin is connected to Vcc, the write protection feature is enabled and operates as shown in the following **Table 2**.

WP Pin Status	BL24C16F		
At VCC	Full(16K)Array		
At GND	Normal Read/Write Operations		

Table 2

Functional Description

1. Memory Organization

BL24C16F, 16K SERIAL EEPROM: Internally organized with 128 pages of 16 bytes each, the 16K requires a 11-bit data word address for random word addressing.

2. Device Operation

CLOCK and DATA TRANSITIONS: The SDA pin is normally pulled high with an external device. Data on the SDA pin may change only during SCL low time periods (see Figure 2). Data changes during SCL high periods will indicate a start or stop condition as defined below.

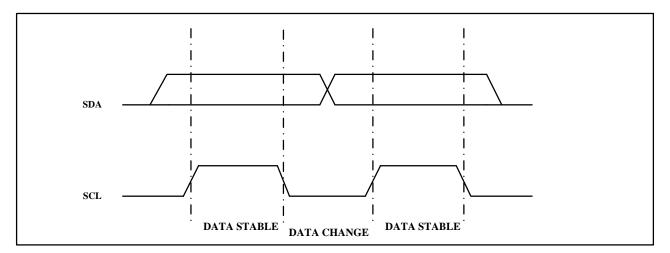


Figure 2. Data Validity



START CONDITION: A high-to-low transition of SDA with SCL high is a start condition which must precede any other command (see **Figure 3**).

STOP CONDITION: A low-to-high transition of SDA with SCL high is a stop condition. After a read sequence, the stop command will place the EEPROM in a standby power mode (see **Figure 3**).

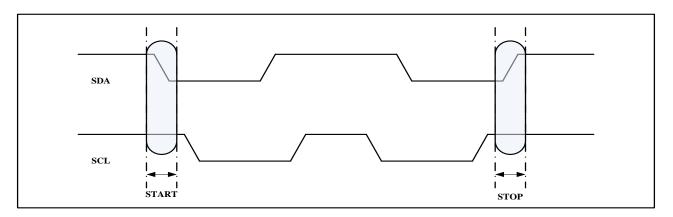


Figure 3. Start and Stop Definition

ACKNOWLEDGE: All addresses and data words are serially transmitted to and from the EEPROM in 8-bit words. The EEPROM sends a "0" to acknowledge that it has received each word. This happens during the ninth clock cycle.

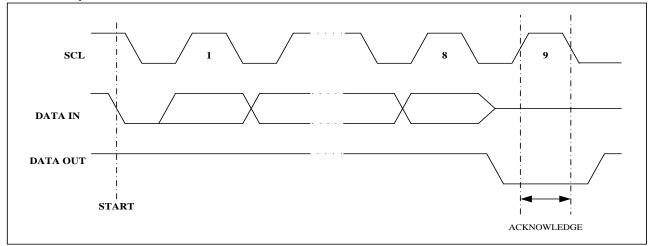


Figure 4. Output Acknowledge

STANDBY MODE: The BL24C16F features a low-power standby mode which is enabled: (a) upon power-up;(b) after the receipt of the STOP bit and the completion of any internal operations.

MEMORY RESET: After an interruption in protocol, power loss or system reset, any two-wire part can be reset by following these steps:

- 1. Clock up to 9 cycles.
- 2. Lock SDA high in each cycle while SCL is high.
- 3. Create a start condition and a stop condition.

3. Device Addressing

The 16K EEPROM devices all require an 8-bit device address word following a start condition to enable the chip for a read or write operation (see **Figure 5**)




Figure 5. Device Address

The device address word consists of a mandatory "1", "0" sequence for the first four most significant bits as shown. This is common to all the Serial EEPROM devices.

The eighth bit of the device address is the read/write operation select bit. A read operation is initiated if this bit is high and a write operation is initiated if this bit is low.

Upon a compare of the device address, the EEPROM will output a "0". If a compare is not made, the chip will return to a standby state.

DATA SECURITY: The BL24C16F has a hardware data protection scheme that allows the user to write protect the entire memory when the WP pin is at VCC.

4. Write Operations

BYTE WRITE: A write operation requires an 8-bit data word address following the device address word and acknowledgment. Upon receipt of this address, the EEPROM will again respond with a "0" and then clock in the first 8-bit data word. Following receipt of the 8-bit data word, the EEPROM will output a "0" and the addressing device, such as a microcontroller, must terminate the write sequence with a stop condition. At this time the EEPROM enters an internally timed write cycle, tWR, to the nonvolatile memory. All inputs are disabled during this write cycle and the EEPROM will not respond until the write is complete (see **Figure 6**).

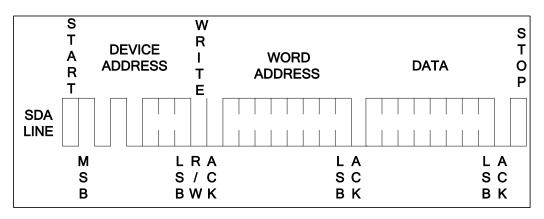


Figure 6. Byte Write

PAGE WRITE: The 16K devices are capable of 16-byte page writes. A page write is initiated the same as a byte write, but the microcontroller does not send a stop condition after the first data word is clocked in. Instead, after the EEPROM acknowledges receipt of the first data word, the microcontroller can transmit up to fifteen more data words. The EEPROM will respond with a "0" after each data word received. The microcontroller must terminate the page write sequence with a stop condition (see **Figure 7**).

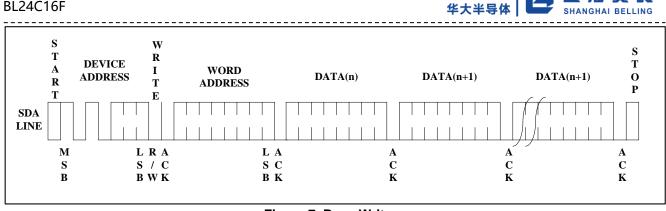


Figure 7. Page Write

The data word address lower four bits are internally incremented following the receipt of each data word. The higher data word address bits are not incremented, retaining the memory page row location. When the word address, internally generated, reaches the page boundary, the following byte is placed at the beginning of the same page. If more than sixteen data words are transmitted to the EEPROM, the data word address will "roll over" and previous data will be overwritten.

ACKNOWLEDGE POLLING: Once the internally timed write cycle has started and the EEPROM inputs are disabled, acknowledge polling can be initiated. This involves sending a start condition followed by the device address word. The read/write bit is representative of the operation desired. Only if the internal write cycle has completed will the EEPROM respond with a "0", allowing the read or write sequence to continue.

5. **Read Operations**

Read operations are initiated the same way as write operations with the exception that the read/write select bit in the device address word is set to "1". There are three read operations: current address read, random address read and sequential read.

CURRENT ADDRESS READ: The internal data word address counter maintains the last address accessed during the last read or write operation, incremented by one. This address stays valid between operations as long as the chip power is maintained. The address "roll over" during read is from the last byte of the last memory page to the first byte of the first page. The address "roll over" during write is from the last byte of the current page to the first byte of the same page. Once the device address with the read/write select bit set to "1" is clocked in and acknowledged by the EEPROM, the current address data word is serially clocked out. The microcontroller does not respond with an input "0" but does generate a following stop condition (see Figure 8).

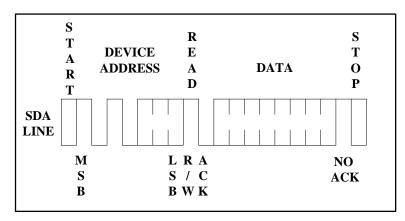


Figure 8. Current Address Read



RANDOM READ: A random read requires a "dummy" byte write sequence to load in the data word address. Once the device address word and data word address are clocked in and acknowledged by the EEPROM, the microcontroller must generate another start condition. The microcontroller now initiates a current address read by sending a device address with the read/write select bit high. The EEPROM acknowledges the device address and serially clocks out the data word. The microcontroller does not respond with a "0" but does generate a following stop condition (see **Figure 9**)

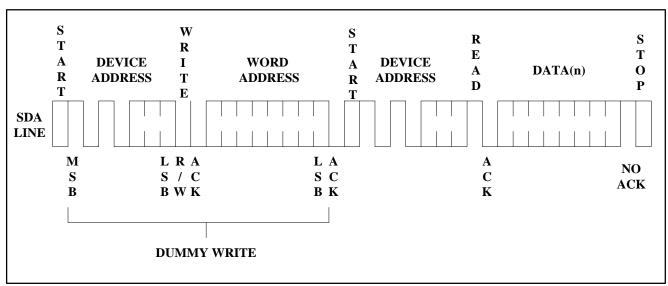


Figure 9. Random Read

SEQUENTIAL READ: Sequential reads are initiated by either a current address read or a random address read. After the microcontroller receives a data word, it responds with an acknowledge. As long as the EEPROM receives an acknowledge, it will continue to increment the data word address and serially clock out sequential data words. When the memory address limit is reached, the data word address will "roll over" and the sequential read will continue. The sequential read operation is terminated when the microcontroller does not respond with a "0" but does generate a following stop condition (see **Figure 10**).

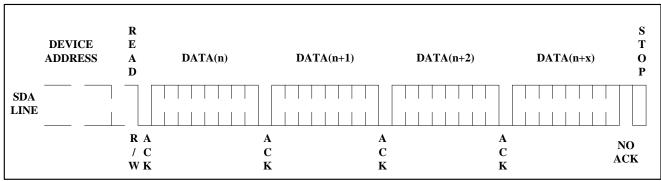


Figure 10. Sequential Read

Electrical Characteristics

Absolute Maximum Stress Ratings:

	DC Supply Voltage
•	Storage Temperature65°C to +150°C
•	Electrostatic pulse (Human Body model)

Comments:

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to this device. These are stress ratings only. Functional operation of this device at these or any other conditions above those indicated in the operational sections of this specification is not implied or intended. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

DC Electrical Characteristics

Applicable over recommended operating range from (unless otherwise noted):

BL24C16F	TA =-40°C to +85°C			VCC = +1.7V to +5.5V@400kHz VCC = +2.5V to +5.5V@1MHz					
BL24C16FE1	TA =-40°C to +105°C								
BL24C16FE0	TA =-4	∝=-40°C to +125°C			CL=100 pF				
Parameter	Symbol Min			Тур	Max	Unit	Condition		
Supply Current VCC=5.0V		Icc1	-	0.14	0.3	mA	READ at 400KHZ		
Supply Current VCC=5.0V		Icc2	-	0.28	0.5	mA	WRITE at 400KHZ		
Supply Current VCC=5.0V		ISB1	-	0.03	0.5	μA	VIN=Vcc or Vss		
Input Leakage Current		IL1	-	0.10	1.0	μA	VIN=Vcc or Vss		
Output Leakage Current		Ilo	-	0.05	1.0	μA	Vout=Vcc or Vss		
Input Low Level		VIL1	-0.3	-	Vcc×0.3	V	Vcc=1.7V to 5.5V		
Input High Level		VIH1	Vcc×0.7	-	Vcc+0.3	V	Vcc=1.7V to 5.5V		
Output Low Level VCC=1.	7V	Vol1	-	-	0.2	V	lo∟=0.15mA		
Output Low Level VCC=5.	0V	Vol2	-	-	0.4	V	lo∟=3.0mA		

Table 3

Pin Capacitance

Applicable over recommended operating range from TA = 25°C, f = 1.0 MHz, VCC = +2.5V

Parameter	Symbol	Min	Тур	Max	Unit	Condition
Input/Output Capacitance(SDA)	Ci/o	-	-	8	pF	Vio=0V
Input Capacitance(A2,SCL)	Cin	-	-	6	pF	VIN=0V

Table 4

AC Electrical Characteristics

Applicable over recommended operating range from (unless otherwise noted):

BL24C16F	TA =-40°C to +85°C VCC = +1.7V to +5.5V@400kHz										
BL24C16FE1	TA =-40°C to +105°C VCC =					CC = +2.5V to +5.5V@1MHz					
BL24C16FE0	TA =-40°C	o +125℃ CL=100 pF									
Deservator		Symbol	1	.7\	/≤Vcc <	2.5V	2.5V≤Vcc < 5.5V			Linite	
Parameter			М	in	Тур	Max	Min	Тур	Max	Units	
Clock Frequency,SCL		fsc∟	-	-	-	400	-	-	1000	kHz	
Clock Pulse Width Low		tLOW	1.	.3	-	-	0.5	-	-	μs	
Clock Pulse Width High		t HIGH	0.	.6	-	-	0.26	-	-	μs	
Noise Suppression Time		tı	-	-	-	50	-	-	50	ns	
Clock Low to Data Out Val	id	t AA	-	-	-	0.9	-	-	0.45	μs	
Time the bus must be free new transmission can star		teur	1.	.3	-	-	0.5	-	-	μs	
Start Hold Time		t HD:STA	0.	.6	-	-	0.25	-	-	μs	
Start Setup Time		tsu:sta	0.	.6	-	-	0.25	-	-	μs	
Data In Hold Time		thd:dat	()	-	-	0	-	-	μs	
Data in Setup Time		tsu:dat	10	00	-	-	100	-	-	ns	
Input Rise Time(1)		t R	-	-	-	0.3	-	-	0.12	μs	
Input Fall Time(1)		t⊧	-	-	-	0.3	-	-	0.12	μs	
Stop Setup Time		tsu:sto	0.	.6	-	-	0.25	-	-	μs	
Data Out Hold Time		tон	5	0	-	-	50	-	-	ns	
Write Cycle Time		tw R	-	-	1.9	3	-	1.9	3	ms	
5.0V,25°C,Byte Mode(1)		Endurance	1	М	-	-	1M	-	-	Write Cycle	

Notes:

Table 5

1. This parameter is characterized and is not 100% tested.

2. AC measurement conditions:

RL (connects to VCC): 1.3 k

Input pulse voltages: 0.3 VCC to 0.7 VCC

Input rise and fall time: 50 ns

Input and output timing reference voltages: 0.5 VCC

The value of RL should be concerned according to the actual loading on the user's system.

Bus Timing



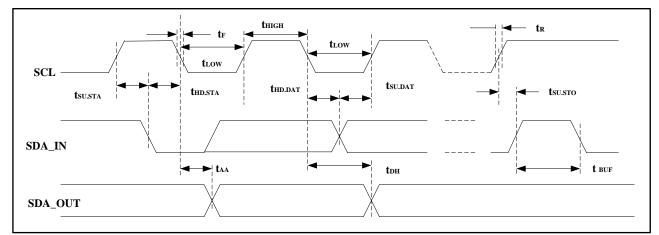


Figure 11. SCL: Serial Clock, SDA: Serial Data I/O

Write Cycle Timing

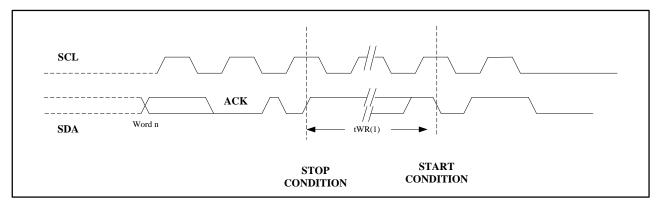


Figure 12. SCL: Serial Clock, SDA: Serial Data I/O

Notes:


The write cycle time tWR is the time from a valid stop condition of a write sequence to the end of the internal clear/write cycle.

_ _ _ _ _ _ _ _ _ _ _ _

- - - .

Package Information


PDIP Outline Dimensions

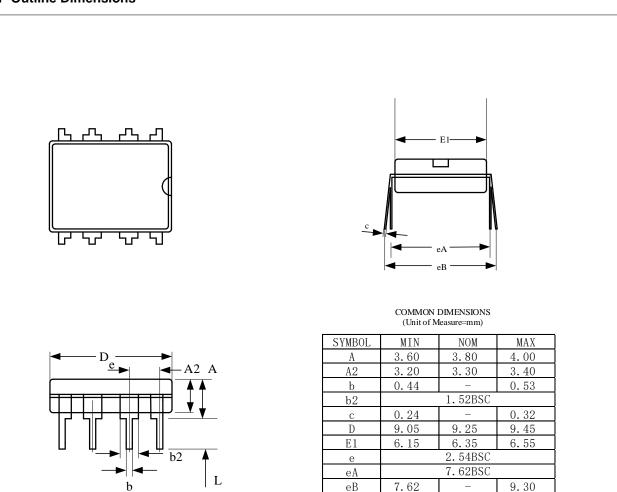


L



3.00BSC

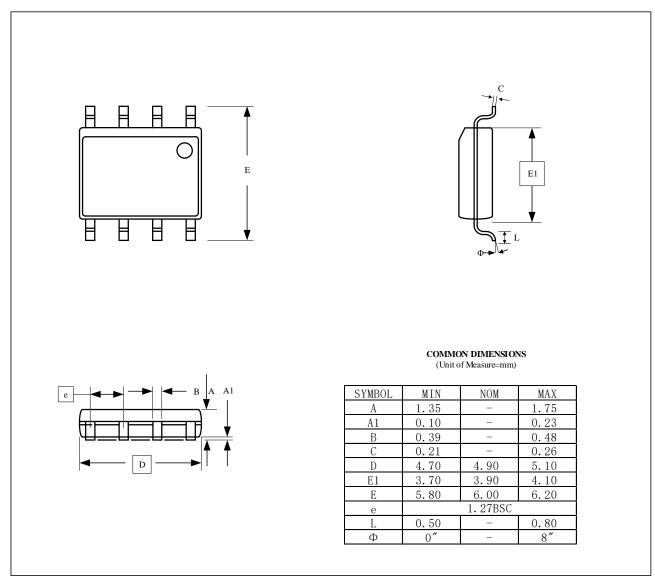



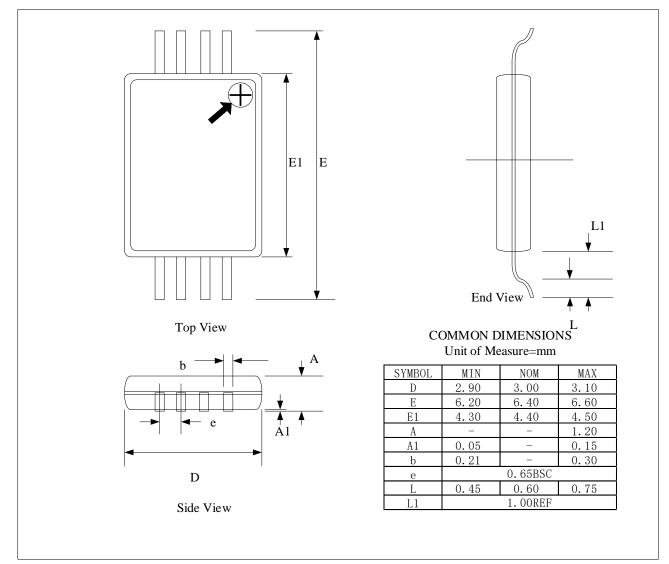


_ _ _ _ _ _ _ _ _ _ _

_ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _





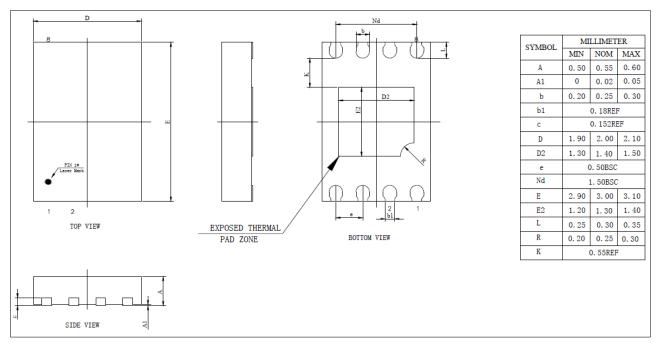


_ _ _ _ _

_ _ _ _ _ _ _ _








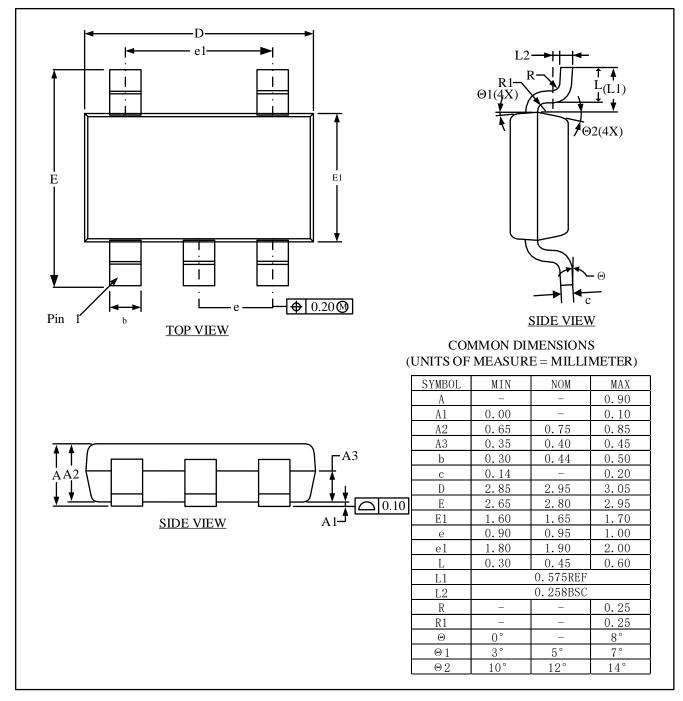



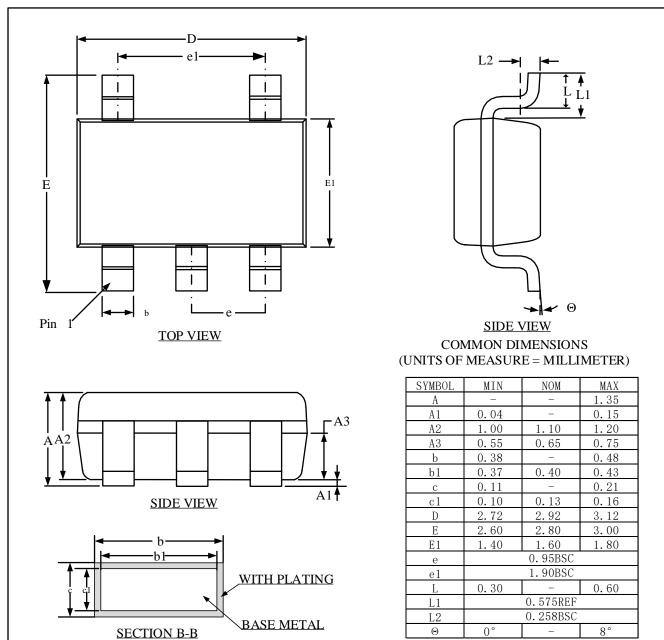




BELACION				
Marking Diagram PDIP				
	BL24C16F YYWW#ZZ SSSSSP O			
SOP				
	BL24C16F SSSSSPE0			
TSSOP				
	O BL24C16F SSSSS E0			
UDFN				
	BL16F E0 YYWW O			
SOT23-5/TSOT23-5				
	24C16F SSSSSP			
YY	Year			
WW	Week			
ZZ	assembly house			
SSSSS E0	Lot ID			
	Blank: -40°C to +85°C E1: -40°C to +105°C			
	E0: -40°C to +125°C			



Ordering Information

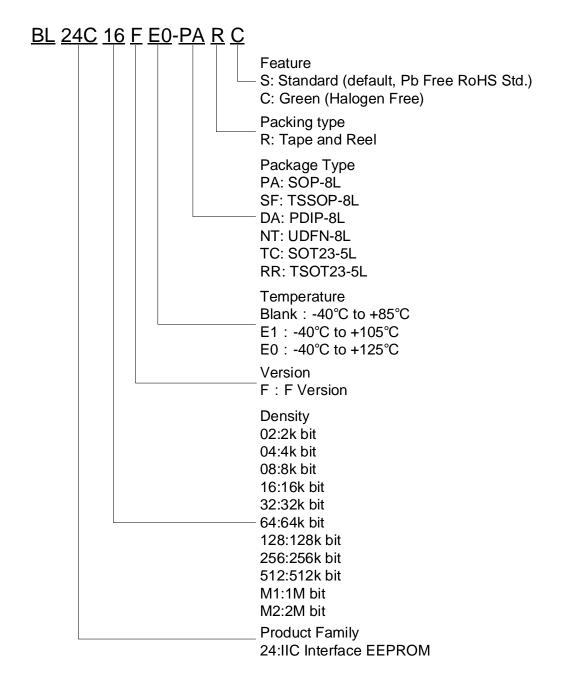

Device	Package	Shipping (Qty/Packing)
BL24C16F	SOP8	2500/Tape &Reel
BL24C16F	TSSOP8L	3000/Tape &Reel
BL24C16F	UDFN	3000/Tape &Reel
BL24C16F	TSOT23-5	3000/Tape &Reel
BL24C16F	SOT23-5	3000/Tape &Reel

_ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _

Revision history

Version 1.00 BL24C16F

Initial Version