

L78LR05D-MA-E

150 mA, 5 V Linear Voltage Regulator with Reset Function

Features

- Backup Supported with Reset Function 150 mA
- 5 V Linear Voltage Regulator
- This is a Pb-Free Device

Application

- Prevention of Malfunction that May Occur when the Power Supply of a Microprocessor System is Turned ON/OFF
- Measure Taken against Abnormal Operations that May Occur at the Time of Instantaneous Break of Power Supply and Control of a Battery-backed Up Memory System

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
VIN max	Maximum Input Voltage		25	V
Pd max	Allowable Power Dissipation	No heat sink	1.0	W
Topr	Operating Ambient Temperature		-3.0 to +80	°C
Tstg	Storage Ambient Temperature		-55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

OPERATING CONDITIONS (Ta = 25°C)


Symbol	Parameter	Conditions	Ratings	Unit
VIN	Input Voltage		7.5 to 20	V
IOUT	Output Current		1 to 150	mA

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.




ON Semiconductor®

www.onsemi.com



IPAK5 / TP5H
CASE 369AG

MARKING DIAGRAM

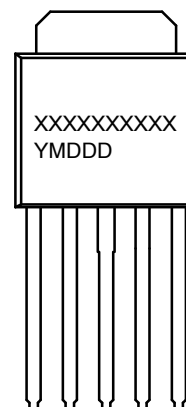

XXXXX = Specific Device Code
Y = Year
M = Month
DDD = Additional Traceability Data

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

ORDERING INFORMATION

Device	Package	Shipping
L78LR05D-MA-E	IPAK5 / TP5H (Pb-Free)	500 / Bulk

L78LR05D-MA-E

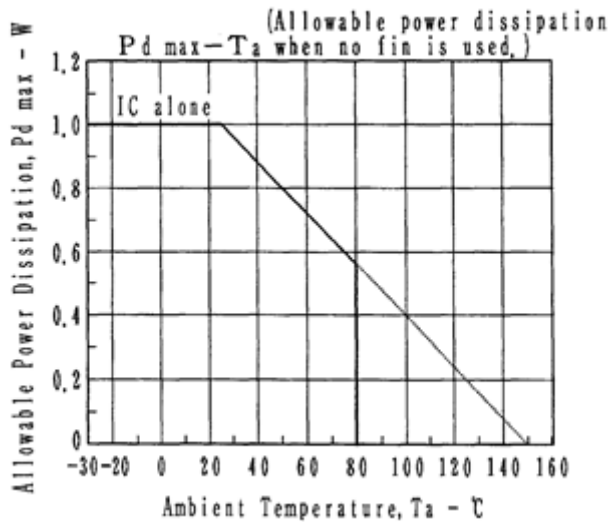


Figure 1. Allowable Power Dissipation (Pd max) vs. Ambient Temperature (Ta)

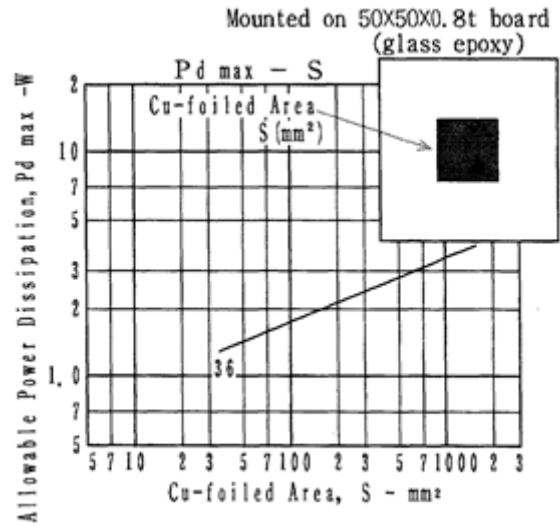


Figure 2. Allowable Power Dissipation (Pd max) vs. Cu-foiled Area (S)

*The measured values of Pd represent the values measured when solder on the Cu-foiled area is all wet

OPERATING CHARACTERISTICS (Ta = 25°C, VIN = 10 V, IOUT = 40 mA, CIN = 1 µF, COUT = 10 µF)

Symbol	Characteristic	Conditions	Min	Typ	Max	Unit	
VOUT1	Output Voltage	Tj = 25°C	4.8	5.0	5.2	V	
VOUT2		7 V ≤ VIN ≤ 20V, 1 mA ≤ IOUT ≤ 70 mA	4.75	-	5.25	V	
ΔVO LINE1	Line regulation	Tj = 25°C	7 V ≤ VIN ≤ 20 V	-	6	75	mV
ΔVO LINE2			8 V ≤ VIN ≤ 20 V	-	3	50	mV
ΔVO LOAD1	Load regulation	Tj = 25°C	1 mA ≤ IOUT ≤ 100 mA	-	9	60	mV
ΔVO LOAD2			1 mA ≤ IOUT ≤ 40 mA	-	3	30	mV
ICC	Current drain	Iout = 100 mA	-	1.4	3.4	mA	
ΔICC LINE	Current drain Variation range	8 V ≤ IN ≤ 20 V	-	0.12	1.5	mA	
ΔICC LOAD		1 mA ≤ IOUT ≤ 40 mA	-	0.01	0.1	mA	
VNO	Output noise voltage	10 Hz ≤ f ≤ 100 kHz, IOUT = 1 mA	-	80	-	µV	
ΔVOUT/ΔTj	Temperature coefficient of output voltage	IOUT = 1 mA, Tj = 25 to 125°C	-	±0.5	-	mV/°C	
Rrej	Ripple rejection	Tj = 25°C, f = 120 Hz, 8 V ≤ VIN ≤ 18 V	-	79	-	dB	
VDROP	Dropout voltage	Tj = 25°C	-	1.5	2.2	V	
IOSC	Output short current		150	300	450	mA	
VORH	"H" reset output voltage	Tj = 25°C, VIN = 3 V, IOUT = 1 mA	4.8	5.0	5.2	V	
VORL	"L" reset output voltage		-	10	200	mV	
VRT	Reset threshold voltage	Tj = 25°C	4.00	4.20	4.35	V	
VRTH	Reset threshold Hysteresis voltage		50	100	200	mV	
td	Reset output delay time	Cd = 0.1 µF	7.5	10	12.5	ms	
IO LEAK	Output pin leak current	VIN = 0 V, VO = 6 V	-	0.001	2	µA	
IOR LEAK	Reset output pin leak current	VIN = 0 V, VO = 6 V	-	0.001	2	µA	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

L78LR05-MA-E

Equivalent Circuit Block Diagram


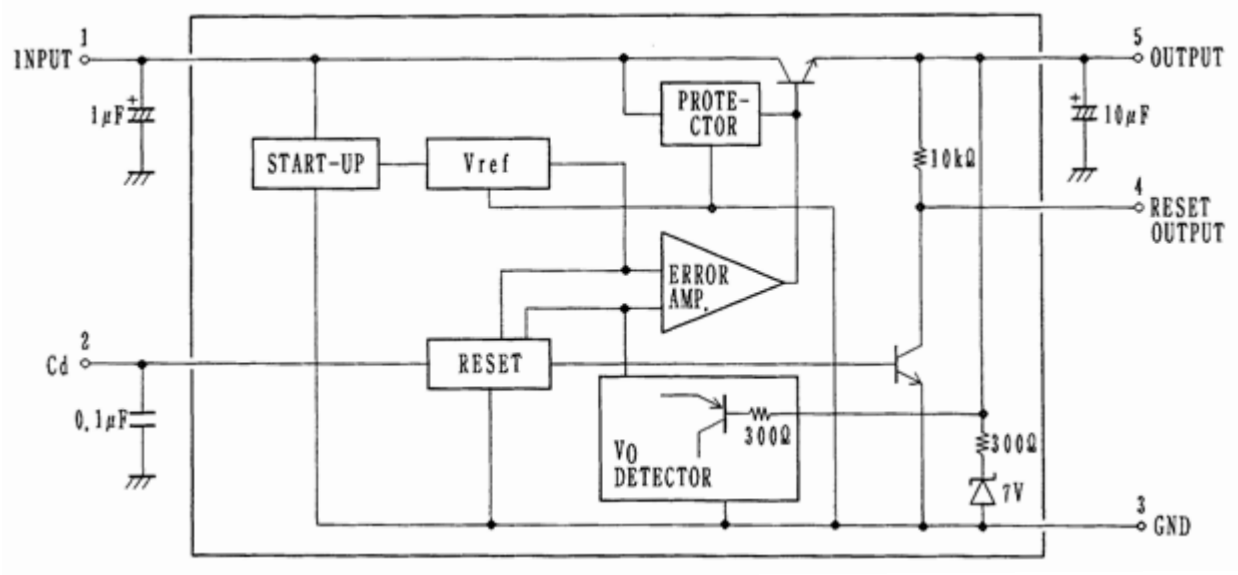


Figure 3. Equivalent Circuit Block Diagram

Sample Application Circuit

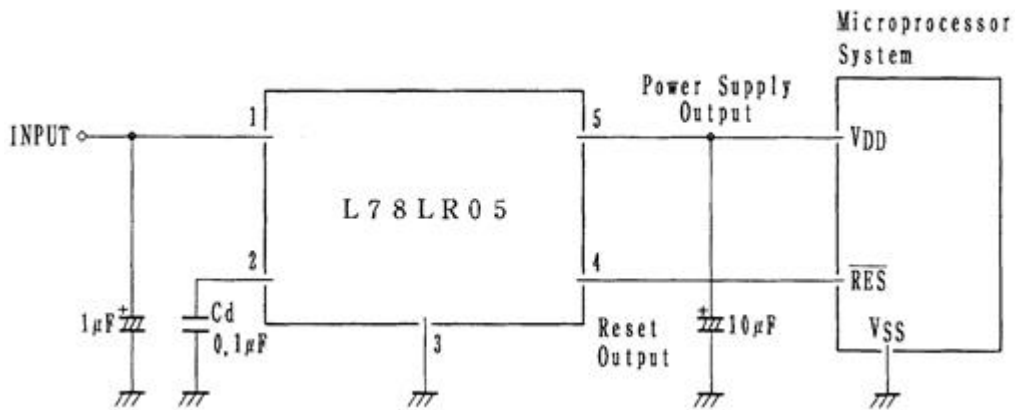

$$t_d = 100 \times C_d (\mu F) [ms]$$

NOTES:

1. When $C_d \geq 10 \mu F$, the capacitor may not discharge completely, causing t_d to be made shorter than a set value. In this case, connect high-speed diode (DS442) across pin 2 (anode side) and pin 5 (cathode side)
2. Connecting a pull-up resistor to the reset output externally allows sink current up to 4 mA to flow.

Figure 4. Sample Application Circuit

Reset Operation


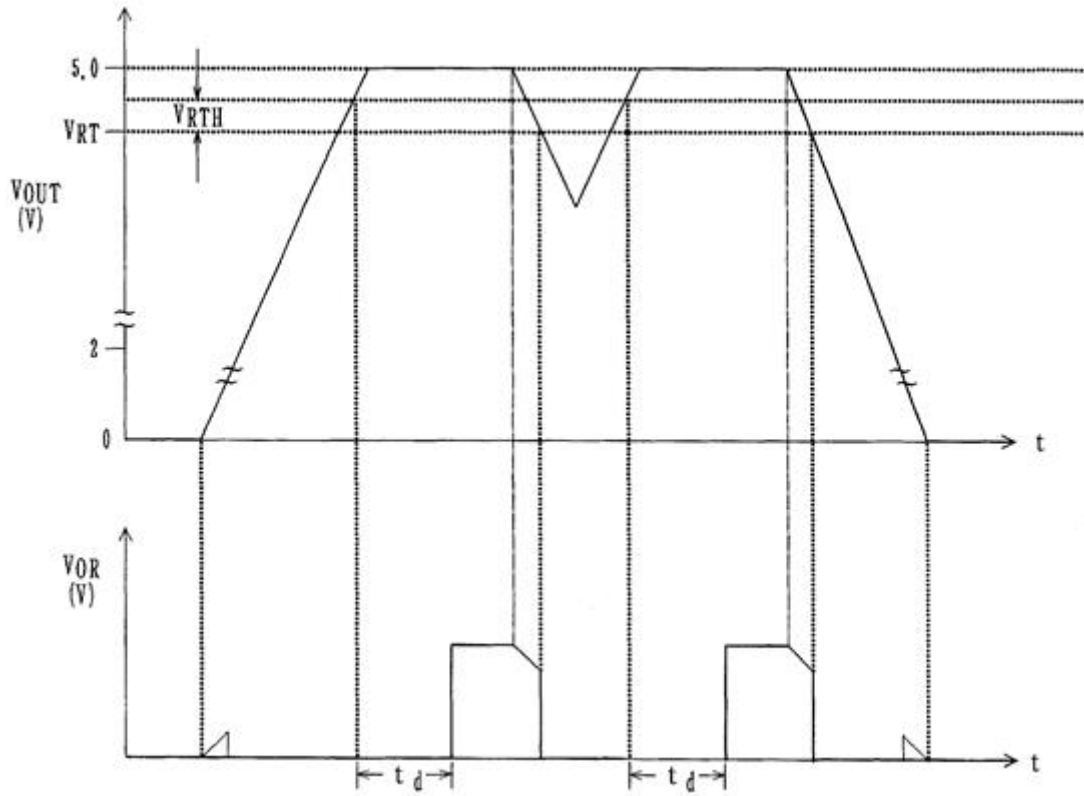


Figure 5. Reset Operation


L78LR05D-MA-E

PACKAGE DIMENSIONS

IPAK5 / TP5H
CASE 369AG
ISSUE A

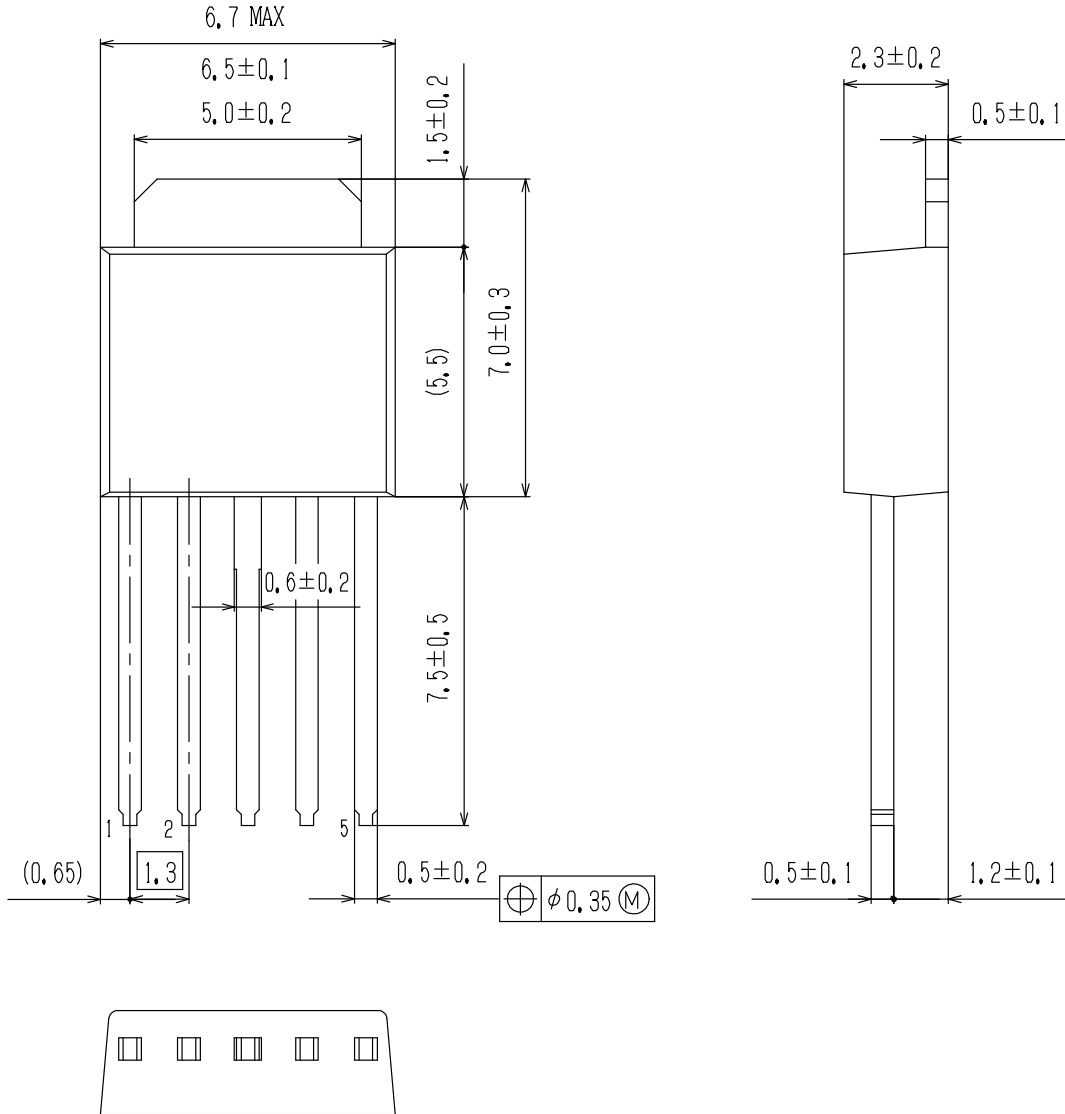

L78LR05D-MA-E

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative