# Single Inverter with Schmitt-Trigger Input

## MC74HC1G14

The MC74HC1G14 is a high speed CMOS inverter with Schmitt– Trigger input fabricated with silicon gate CMOS technology.

The internal circuit is composed of multiple stages, including a buffer output which provides high noise immunity and stable output.

The MC74HC1G14 output drive current is 1/2 compared to MC74HC series.

### Features

- High Speed:  $t_{PD} = 7 \text{ ns} (Typ)$  at  $V_{CC} = 5 \text{ V}$
- Low Power Dissipation:  $I_{CC} = 1 \ \mu A$  (Max) at  $T_A = 25^{\circ}C$
- High Noise Immunity
- Balanced Propagation Delays  $(t_{pLH} = t_{pHL})$
- Symmetrical Output Impedance  $(I_{OH} = I_{OL} = 2 \text{ mA})$
- Chip Complexity: < 100 FETs
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant




Figure 1. Pinout





Figure 2. Logic Symbol


PIN ASSIGNMENT					
1	N/C				
2	A				
3	GND				
4	Y				
5	V <sub>CC</sub>				



## **ON Semiconductor®**

www.onsemi.com

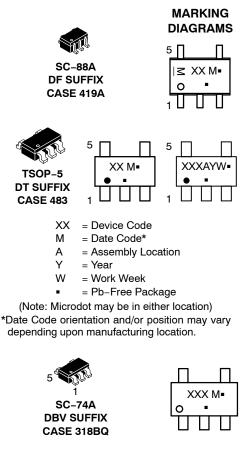



(Note: Microdot may be in either location)

#### **FUNCTION TABLE**

Input	Output
Α	Y
L	Н
Н	L

#### **ORDERING INFORMATION**

See detailed ordering, marking and shipping information in the package dimensions section on page 6 of this data sheet.

### MAXIMUM RATINGS

Symbol	Parameter		Value	Unit
V <sub>CC</sub>	DC Supply Voltage	SC-88A (NLV), TSOP-5 SC-88A, SC-74A	-0.5 to +7.0 -0.5 to +6.5	V
V <sub>IN</sub>	DC Input Voltage		–0.5 to V <sub>CC</sub> +0.5	V
V <sub>OUT</sub>	DC Output Voltage		–0.5 to V <sub>CC</sub> +0.5	V
I <sub>IK</sub>	DC Input Diode Current		±20	mA
I <sub>OK</sub>	DC Output Diode Current		±20	mA
I <sub>OUT</sub>	DC Output Source/Sink Current	±12.5	mA	
I <sub>CC</sub> or I <sub>GND</sub>	DC Supply Current per Supply Pin or Ground Pin		±25	mA
T <sub>STG</sub>	Storage Temperature Range		-65 to +150	°C
ΤL	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
TJ	Junction Temperature Under Bias		+150	°C
$\theta_{JA}$	Thermal Resistance (Note 1)	SC–88A SC–74A	377 320	°C/W
PD	Power Dissipation in Still Air	SC–88A SC–74A	332 390	mW
MSL	Moisture Sensitivity		Level 1	
F <sub>R</sub>	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	
V <sub>ESD</sub>	ESD Withstand Voltage (Note 2)	Human Body Model Charged Device Model	2000 1000	V
ILATCHUP	Latchup Performance (Note 3)	SC–88A (NLV), TSOP–5 SC–88A, SC–74A	±500 ±100	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.
Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 20 ounce copper trace with no air flow per JESD51-7.
HBM tested to ANSI/ESDA/JEDEC JS-001-2017. CDM tested to JESD22-C101-F. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued per JEDEC/JEP172A.

3. Tested to EIA/JESD78 Class II.

### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Мах	Unit
V <sub>CC</sub>	DC Supply Voltage	2.0	6.0	V
V <sub>IN</sub>	DC Input Voltage	0.0	V <sub>CC</sub>	V
V <sub>OUT</sub>	DC Output Voltage	0.0	V <sub>CC</sub>	V
T <sub>A</sub>	Operating Temperature Range	-55	+125	°C
t <sub>r</sub> , t <sub>f</sub>		SOP-5           = 2.0 V           = 3.0 V           = 4.5 V           = 6.0 V	No Limit No Limit No Limit No Limit	ns/V
	Input Rise and Fall Time SC-88A, S $V_{CC}$ $V_{CC} = 2.3 V$ $V_{CC} = 3.0 V$ $V_{CC} = 4.5 V$	= 2.0 V – to 2.7 V – to 3.6 V –	No Limit No Limit No Limit No Limit No Limit	

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.


### DC ELECTRICAL CHARACTERISTICS

		Test	v <sub>cc</sub>	Т	A = 25°	C	<b>-40°C</b> ≤ 1	Γ <sub>A</sub> ≤ 85°C	-55°C ≤ T	A ≤ 125°C	
Symbol	Parameter	Conditions	(V)	Min	Тур	Max	Min	Max	Min	Max	Unit
V <sub>T+</sub>	Positive Threshold Voltage		3.0 4.5 5.5	- - -	2.0 3.0 3.6	2.20 3.15 3.85	- -	2.20 3.15 3.85	- -	2.20 3.15 3.85	V
V <sub>T-</sub>	Negative Threshold Voltage		3.0 4.5 5.5	0.9 1.35 1.65	1.5 2.3 2.9	- - -	0.9 1.35 1.65	- -	0.9 1.35 1.65		V
V <sub>H</sub>	Hysteresis Voltage		3.0 4.5 5.5	0.30 0.40 0.50	0.57 0.67 0.74	1.20 1.40 1.60	0.30 0.40 0.50	1.20 1.40 1.60	0.30 0.40 0.50	1.20 1.40 1.60	V
V <sub>OH</sub>	High-Level Output Voltage		2.0 3.0 4.5 6.0	1.9 2.9 4.4 5.9	2.0 3.0 4.5 6.0	- - -	1.9 2.9 4.4 5.9		1.9 2.9 4.4 5.9	- - -	V
		$V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OH} = -2 \text{ mA}$ $I_{OH} = -2.6 \text{ mA}$	4.5 6.0	4.18 5.68	4.31 5.80		4.13 5.63		4.08 5.58	-	
V <sub>OL</sub>	Low-Level Output Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OL} = 20 \ \mu A$	2.0 3.0 4.5 6.0	- - -	0.0 0.0 0.0 0.0	0.1 0.1 0.1 0.1		0.1 0.1 0.1 0.1		0.1 0.1 0.1 0.1	V
		$V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OL} = 2 \text{ mA}$ $I_{OL} = 2.6 \text{ mA}$	4.5 6.0		0.17 0.18	0.26 0.26		0.33 0.33		0.40 0.40	
I <sub>IN</sub>	Input Leakage Current	V <sub>IN</sub> = 6.0 V or GND	6.0	-	-	±0.1	-	±1.0	-	±1.0	μΑ
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> = V <sub>CC</sub> or GND	6.0	-	-	1.0	-	10	-	40	μΑ

### AC ELECTRICAL CHARACTERISTICS


			Т	T <sub>A</sub> = 25°C		-40°C ≤ 1	Γ <sub>A</sub> ≤ 85°C	-55°C ≤ T	<sub>A</sub> ≤ 125°C	
Symbol	Parameter	Test Conditions	Min	Тур	Max	Min	Max	Min	Max	Unit
t <sub>PLH</sub> ,	Propagation Delay,	$V_{CC} = 5.0 \text{ V}$ $C_{L} = 15 \text{ pF}$	-	3.5	15	-	20	_	25	ns
tphl	Input A or B to Y	$ \begin{array}{l} V_{CC} = 2.0 \ V \ C_L = 50 \ pF \\ V_{CC} = 3.0 \ V \\ V_{CC} = 4.5 \ V \\ V_{CC} = 6.0 \ V \end{array} $		19 10.5 7.5 6.5	100 27 20 17		125 35 25 21		155 90 35 26	
t <sub>TLH</sub> ,	Output Transition	$V_{CC} = 5.0 \text{ V}$ $C_{L} = 15 \text{ pF}$	-	3	10	_	15	_	20	ns
t <sub>THL</sub>	Time	$ \begin{array}{l} V_{CC} = 2.0 \ V \ C_L = 50 \ pF \\ V_{CC} = 3.0 \ V \\ V_{CC} = 4.5 \ V \\ V_{CC} = 6.0 \ V \end{array} $		25 16 11 9	125 35 25 21		155 45 31 26		200 60 38 32	
C <sub>IN</sub>	Input Capacitance		-	5	10	-	10	-	10	pF
	Typical @ 25°C, V <sub>CC</sub> = 5.0 V									
C <sub>PD</sub>	Power Dissipation Ca	pacitance (Note 4)					10			рF

4.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}$ .  $C_{PD}$  is used to determine the no-load dynamic power consumption;  $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$ .

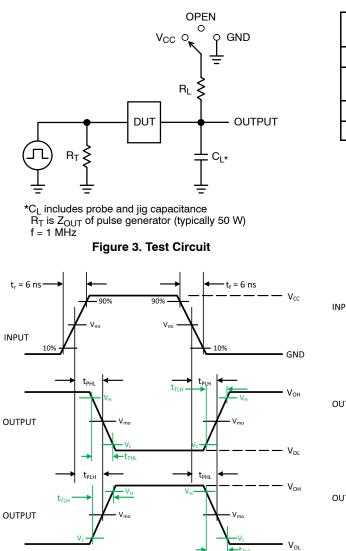

Test	Switch Position	C <sub>L</sub> , pF	$R_L, \Omega$
$t_{PLH}$ / $t_{PHL}$	Open		Х
t <sub>TLH</sub> / t <sub>THL</sub> (Note 5)	Open	See AC Characteristics Table	х
t <sub>PLZ</sub> / t <sub>PZL</sub>	V <sub>CC</sub>	Table	1 k
$t_{PHZ}$ / $t_{PZH}$	GND		1 k

X - Don't Care





		V <sub>mo</sub> , V				
$V_{CC}, V$	V <sub>mi</sub> , V	t <sub>PLH</sub> , t <sub>PHL</sub>	$t_{\text{PZL}}, t_{\text{PLZ}}, t_{\text{PZH}}, t_{\text{PHZ}}$	V <sub>L</sub> , V	V <sub>H</sub> , V	V <sub>Y</sub> , V
3.0 to 3.6	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>OL</sub> + 0.1 (V <sub>OH</sub> – V <sub>OL</sub> )	V <sub>OL</sub> + 0.9 (V <sub>OH</sub> – V <sub>OL</sub> )	0.3
4.5 to 5.5	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>OL</sub> + 0.1 (V <sub>OH</sub> – V <sub>OL</sub> )	V <sub>OL</sub> + 0.9 (V <sub>OH</sub> – V <sub>OL</sub> )	0.3

5.  $t_{TLH}$  and  $t_{THL}$  are measured from 10% to 90% of (V<sub>OH</sub> - V<sub>OL</sub>), and 90% to 10% of (V<sub>OH</sub> - V<sub>OL</sub>), respectively.


### **ORDERING INFORMATION**

Device	Packages	Specific Device Code	Pin 1 Orientation (See below)	Shipping <sup>†</sup>
MC74HC1G14DFT1G	SC-88A	HA	Q2	3000 / Tape & Reel
NLVHC1G14DFT1G*	SC-88A	HA	Q2	3000 / Tape & Reel
MC74HC1G14DFT2G	SC-88A	HA	Q4	3000 / Tape & Reel
NLVHC1G14DFT2G*	SC-88A	HA	Q4	3000 / Tape & Reel
MC74HC1G14DTT1G	TSOP-5	HA	Q4	3000 / Tape & Reel
NLV74HC1G14DTT1G*	TSOP-5	HA	Q4	3000 / Tape & Reel
MC74HC1G14DBVT1G	SC-74A	HA	Q4	3000 / Tape & Reel

+For complete information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D. \*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q100 Qualified and PPAP


Capable.

### Pin 1 Orientation in Tape and Reel



**Direction of Feed** 



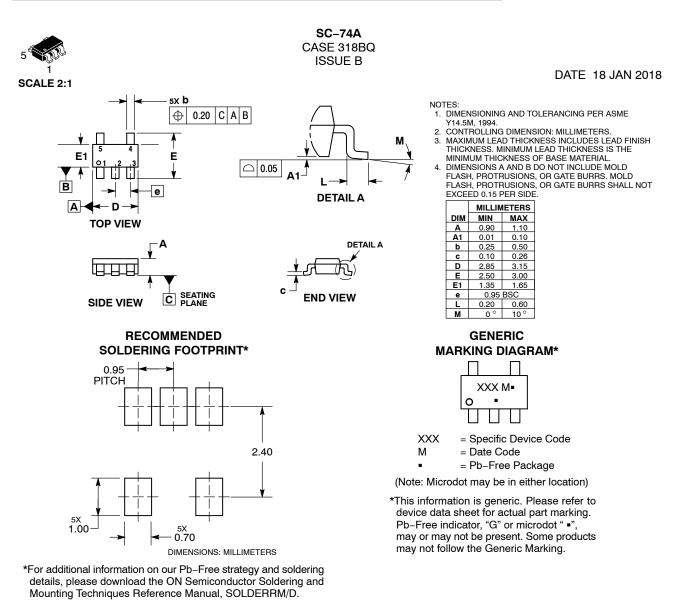

DOCUMENT NUMBER:	98AON66279G	Electronic versions are uncontrolled except when accessed directly from Printed versions are uncontrolled except when stamped "CONTROLLED 0					
DESCRIPTION:	SC-74A		PAGE 1 OF 1				
ON Semiconductor and (1) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others							





DOCUMENT NUMBER:	98ASB42984B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	SC-88A (SC-70-5/SOT-35	SC-88A (SC-70-5/SOT-353)				

ON Semiconductor and ()) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights or the rights of others.





DOCUMENT NUMBER:	BARB18753C Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.						
DESCRIPTION:	TSOP-5	PAGE 1 OF 1					
ON Semiconductor reserves the right the suitability of its products for any pa	ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the						

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor date sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use a a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor houteds for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

ON Semiconductor Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada Phone: 011 421 33 790 2910 Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative