# NLU1GT86

# Single 2-Input Exclusive OR Gate, TTL Level

# LSTTL-Compatible Inputs

The NLU1GT86 MiniGate<sup>™</sup> is an advanced CMOS high-speed 2-input Exclusive OR gate in ultra-small footprint.

The device input is compatible with TTL-type input thresholds and the output has a full 5.0 V CMOS level output swing.

The NLU1GT86 input and output structures provide protection when voltages up to 7.0 V are applied, regardless of the supply voltage.


#### Features

- High Speed:  $t_{PD} = 3.1 \text{ ns} (Typ) @ V_{CC} = 5.0 \text{ V}$
- Low Power Dissipation:  $I_{CC} = 1 \ \mu A \ (Max)$  at  $T_A = 25^{\circ}C$
- TTL-Compatible Input:  $V_{IL} = 0.8 \text{ V}$ ;  $V_{IH} = 2.0 \text{ V}$
- CMOS–Compatible Output: V<sub>OH</sub> > 0.8 V<sub>CC</sub>; V<sub>OL</sub> < 0.1 V<sub>CC</sub> @ Load
- Power Down Protection Provided on inputs
- Balanced Propagation Delays
- Ultra-Small Packages
- These are Pb–Free Devices



## **ON Semiconductor®**

www.onsemi.com

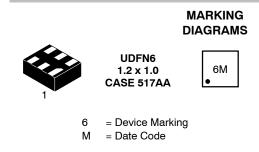

#### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 4 of this data sheet.





Figure 1. Pinout (Top View)





#### **FUNCTION TABLE**

Ing	Output	
Α	В	Y
L	L	L
L	Н	н
н	L	н
н	Н	L

DIN	
PIN	ASSIGNMENT

I III AUU	
1	IN B
2	IN A
3	GND
4	OUT Y
5	NC
6	V <sub>CC</sub>

## MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V <sub>CC</sub>	DC Supply Voltage	-0.5 to +7.0	V
V <sub>IN</sub>	DC Input Voltage	-0.5 to +7.0	V
V <sub>OUT</sub>	DC Output Voltage	-0.5 to +7.0	V
Ι <sub>ΙΚ</sub>	DC Input Diode Current V <sub>IN</sub> < GND	-20	mA
Ι <sub>ΟΚ</sub>	DC Output Diode Current V <sub>OUT</sub> < GND	±20	mA
Ι <sub>Ο</sub>	DC Output Source/Sink Current	±12.5	mA
I <sub>CC</sub>	DC Supply Current Per Supply Pin	±25	mA
I <sub>GND</sub>	DC Ground Current per Ground Pin	±25	mA
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	°C
ΤL	Lead Temperature, 1 mm from Case for 10 Seconds	260	°C
TJ	Junction Temperature Under Bias	150	°C
MSL	Moisture Sensitivity	Level 1	
F <sub>R</sub>	Flammability Rating Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	
V <sub>ESD</sub>	ESD Withstand Voltage Human Body Model (Note 2) Machine Model (Note 3) Charged Device Model (Note 4)	> 2000 > 150 N/A	V
I <sub>LATCHUP</sub>	Latchup Performance Above $V_{CC}$ and Below GND at 125°C (Note 5)	±500	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected. 1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow.

2. Tested to EIA / JESD22-A114-A.

3. Tested to EIA / JESD22-A115-A.

4. Tested to JESD22-C101-A.

5. Tested to EIA / JESD78.

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter			Max	Unit
V <sub>CC</sub>	Positive DC Supply Voltage		1.65	5.5	V
V <sub>IN</sub>	Digital Input Voltage		0	5.5	V
V <sub>OUT</sub>	Output Voltage		0	5.5	V
T <sub>A</sub>	Operating Free-Air Temperature		-55	+125	°C
$\Delta t/\Delta V$	Input Transition Rise or Fall Rate V V	<sub>CC</sub> = 3.3 V ± 0.3 V <sub>CC</sub> = 5.0 V ± 0.5 V	0 0	100 20	ns/V

#### DC ELECTRICAL CHARACTERISTICS


				T <sub>A</sub> = 25 °C		T <sub>A</sub> = +85°C		T <sub>A</sub> = −55°C to +125°C			
Symbol	Parameter	Conditions	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Min	Max	Unit
V <sub>IH</sub>	Low-Level Input Voltage		3.0 4.5 to 5.5	1.4 2.0			1.4 2.0		1.4 2.0		V
V <sub>IL</sub>	Low-Level Input Voltage		3.0 4.5 to 5.5			0.53 0.8		0.53 0.8		0.53 0.8	V
V <sub>OH</sub>	High-Level Output Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OH} = -50 \ \mu A$	3.0 4.5	2.9 4.4	3.0 4.5		2.9 4.4		2.9 4.4		V
		$\label{eq:VIN} \begin{array}{l} V_{IN} = V_{IH} \mbox{ or } V_{IL} \\ I_{OH} = -4 \mbox{ mA} \\ I_{OH} = -8 \mbox{ mA} \end{array}$	3.0 4.5	2.58 3.94			2.48 3.80		2.34 3.66		
V <sub>OL</sub>	Low-Level Output Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OL} = 50 \ \mu\text{A}$	3.0 4.5		0.0 0.0	0.1 0.1		0.1 0.1		0.1 0.1	V
		$\label{eq:VIN} \begin{array}{l} V_{IN} = V_{IH} \mbox{ or } V_{IL} \\ I_{OL} = 4 \mbox{ mA} \\ I_{OL} = 8 \mbox{ mA} \end{array}$	3.0 4.5			0.36 0.36		0.44 0.44		0.52 0.52	
I <sub>IN</sub>	Input Leakage Current	$0 \le V_{IN} \le 5.5 V$	0 to 5.5			±0.1		±1.0		±1.0	μΑ
ICC	Quiescent Supply Current	$0 \le V_{IN} \le V_{CC}$	5.5			1.0		20		40	μΑ
I <sub>CCT</sub>	Quiescent Supply Current	V <sub>IN</sub> = 3.4 V	5.5			1.35		1.50		1.65	mA
I <sub>OPD</sub>	Output Leakage Current	V <sub>OUT</sub> = 5.5 V	0.0			0.5		5.0		10	μA

## **AC ELECTRICAL CHARACTERISTICS** (Input $t_r = t_f = 3.0$ ns)


		v <sub>cc</sub>	Test	т		c	<b>T<sub>A</sub></b> = -	⊦85°C	T <sub>A</sub> = - to +1	-55°C 25°C	
Symbol	Parameter	(V)	Condition	Min	Тур	Max	Min	Max	Min	Max	Unit
t <sub>PLH</sub> ,	Propagation Delay, Input A to	3.0 to 3.6 4.5 to 5.5	C <sub>L</sub> = 15 pF		5.0	11.0		13.0		15.5	ns
ΓΡΗL	t <sub>PHL</sub> Output Y		C <sub>L</sub> = 50 pF		6.2	14.5		16.5		19.5	1
			C <sub>L</sub> = 15 pF		3.1	6.8		6.0		10.0	1
			C <sub>L</sub> = 50 pF		4.2	8.8		10.0		12.0	1
C <sub>IN</sub>	Input Capacitance				5.5	10		10		10.0	pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 6)	5.0			11						pF

6.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the dynamic operating current consumption without load. Average operating current can be obtained by the equation  $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}$ .  $C_{PD}$  is used to determine the no-load dynamic power consumption:  $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$ .

## NLU1GT86

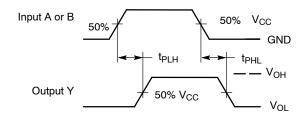





\*Includes all probe and jig capacitance. A 1–MHz square input wave is recommended for propagation delay tests.

#### Figure 4. Test Circuit


#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>		
NLU1GT86MUTCG	UDFN6, 1.2 x 1.0, 0.4P (Pb-Free)	3000 / Tape & Reel		

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

MiniGate is a trademark of Semiconductor Components Industries, LLC (SCILLC).



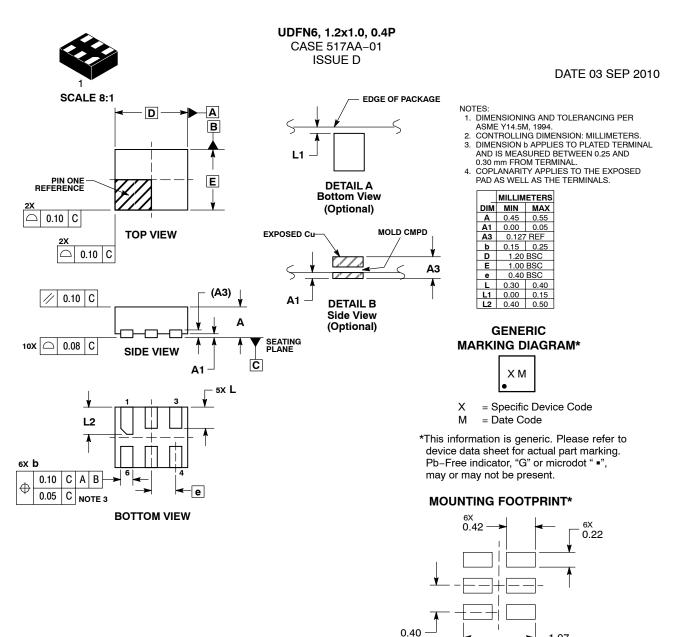

DIMENSIONS: MILLIMETERS

1.07

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PITCH

DOCUMENT NUMBER:	98AON22068D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.					
DESCRIPTION:	6 PIN UDFN, 1.2X1.0, 0.4P	PAGE 1 OF 1					
ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.							

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor date sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use a a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor houteds for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

ON Semiconductor Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada Phone: 011 421 33 790 2910 Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor: NLU1GT86AMX1TCG NLU1GT86BMX1TCG NLU1GT86CMX1TCG NLU1GT86MUTCG