# **Dual General Purpose Transistor**

## **PNP Dual**

This transistor is designed for general purpose amplifier applications. It is housed in the SOT–563 which is designed for low power surface mount applications.

#### Features

- Lead–Free Solder Plating
- Low V<sub>CE(SAT)</sub>, <0.5 V
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V <sub>CEO</sub>	-60	V
Collector-Base Voltage	V <sub>CBO</sub>	-50	V
Emitter-Base Voltage	V <sub>EBO</sub>	-6.0	V
Collector Current – Continuous	۱ <sub>C</sub>	-100	mAdc

#### THERMAL CHARACTERISTICS


Characteristic (One Junction Heated)	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^{\circ}C$ Derate above $25^{\circ}C$	P <sub>D</sub>	357 (Note 1) 2.9 (Note 1)	mW mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{\thetaJA}$	350 (Note 1)	°C/W
Characteristic (Both Junctions Heated)	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^{\circ}C$	P <sub>D</sub>	500 (Note 1)	mW mW/°C
Derate above 25°C		4.0 (Note 1)	
Derate above 25°C Thermal Resistance, Junction-to-Ambient	R <sub>θJA</sub>	`4.0 ´	°C/W

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected. 1. FR-4 @ Minimum Pad.



## **ON Semiconductor®**

http://onsemi.com





#### MARKING DIAGRAM



3T = Specific Device Code

- M = Month Code
- = Pb–Free Package

(Note: Microdot may be in either location)

#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

## EMT1DXV6

#### **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C)

Characteristic	Symbol	Min	Тур	Max	Unit
Collector–Base Breakdown Voltage $(I_C = -50 \ \mu Adc, I_E = 0)$	V <sub>(BR)CBO</sub>	-60	_	-	Vdc
Collector–Emitter Breakdown Voltage $(I_{C} = -1.0 \text{ mAdc}, I_{B} = 0)$	V <sub>(BR)CEO</sub>	-50	-	-	Vdc
Emitter–Base Breakdown Voltage ( $I_E = -50 \ \mu Adc, I_E = 0$ )	V <sub>(BR)EBO</sub>	-6.0	-	-	Vdc
Collector–Base Cutoff Current ( $V_{CB} = -30$ Vdc, $I_E = 0$ )	I <sub>СВО</sub>	-	-	-0.5	nA
Emitter–Base Cutoff Current ( $V_{EB} = -5.0 \text{ Vdc}, I_B = 0$ )	I <sub>EBO</sub>	-	-	-0.5	μΑ
Collector–Emitter Saturation Voltage (Note 2) ( $I_C = -50$ mAdc, $I_B = -5.0$ mAdc)	V <sub>CE(sat)</sub>	-	-	-0.5	Vdc
DC Current Gain (Note 2) (V <sub>CE</sub> = -6.0 Vdc, I <sub>C</sub> = -1.0 mAdc)	h <sub>FE</sub>	120	-	560	-
Transition Frequency ( $V_{CE} = -12 \text{ Vdc}, I_C = -2.0 \text{ mAdc}, f = 30 \text{ MHz}$ )	f <sub>T</sub>	_	140	_	MHz
Output Capacitance ( $V_{CB} = -12 \text{ Vdc}, I_E = 0 \text{ Adc}, f = 1 \text{ MHz}$ )	C <sub>OB</sub>	-	3.5	-	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 2. Pulse Test: Pulse Width  $\leq$  300 µs, D.C.  $\leq$  2%.

#### **ORDERING INFORMATION**


Device	Package	Shipping <sup>†</sup>
EMT1DXV6T1G	SOT–563 (Pb–Free)	4000 / Tape & Reel
NSVEMT1DXV6T1G*	SOT–563 (Pb–Free)	4000 / Tape & Reel
EMT1DXV6T5G	SOT–563 (Pb–Free)	8000 / Tape & Reel
NSVEMT1DXV6T5G*	SOT–563 (Pb–Free)	8000 / Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.
\*NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP

Capable.

## EMT1DXV6

### **TYPICAL CHARACTERISTICS**

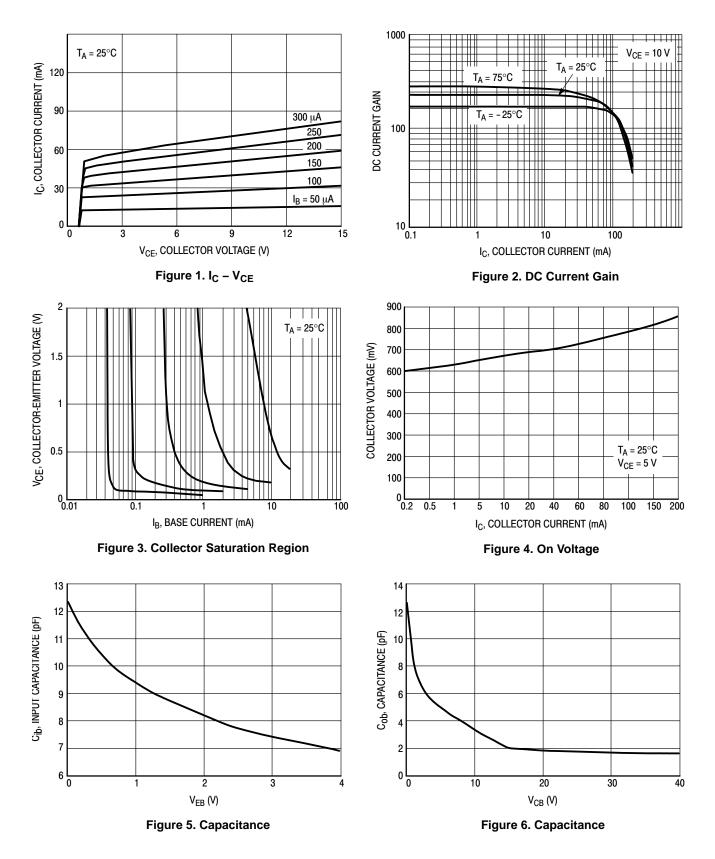

6Х

(

MILLIMETERS

NDM.

0.55

0.22

0.13

1.60

1.20

0.50 BSC

0.20

1.60

MAX.

0.60

0.27

0.18

1.70

1.30

0.30

1.70

SIDE VIEW

MIN.

0.50

0.17

0.08

1.50

1.10

0.10

1.50

DIM

Α

b

С

D E

e L

 $\mathsf{H}_\mathsf{E}$ 






SOT-563, 6 LEAD CASE 463A ISSUE H

DATE 26 JAN 2021

ALE 4:1

- NDTES: 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
- 1. DIMENSIONING AND TOLERANCING PER A 2. CONTROLLING DIMENSION: MILLIMETERS
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS DF BASE MATERIAL.

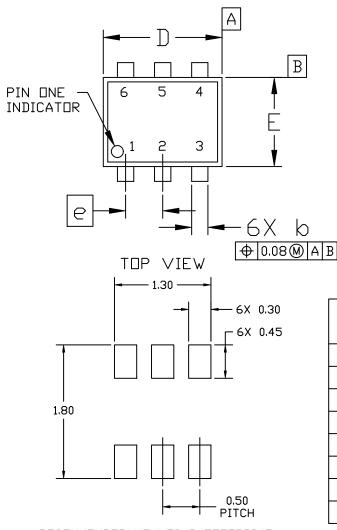

RECOMMENDED MOUNTING FOOTPRINT\* \* For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

DOCUMENT NUMBER: 98AON11126D Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
Electronic versions are uncontrolled except when accessed directly from the Document F	Reposito

ON Semiconductor and unarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights or the rights of others.

STYLE 1:	STYLE 2:	STYLE 3:
PIN 1. EMITTER 1	PIN 1. EMITTER 1	PIN 1. CATHIDE 1
2. BASE 1	2. EMITTER 2	2. CATHIDE 1
3. COLLECTOR 2	3. BASE 2	3. ANUDE/ANUDE 2
4. EMITTER 2	4. COLLECTOR 2	4. CATHIDE 2
5. BASE 2	5. BASE 1	5. CATHIDE 2
6. COLLECTOR 1	6. COLLECTOR 1	6. ANUDE/ANUDE 1
STYLE 4:	STYLE 5:	STYLE 6:
PIN 1. COLLECTOR	PIN 1. CATHEDE	PIN 1. CATHODE
2. COLLECTOR	2. CATHEDE	2. ANODE
3. BASE	3. ANEDE	3. CATHODE
4. EMITTER	4. ANEDE	4. CATHODE
5. COLLECTOR	5. CATHEDE	5. CATHODE
6. COLLECTOR	6. CATHEDE	6. CATHODE
STYLE 7:	STYLE 8:	STYLE 9:
PIN 1. CATHODE	PIN 1. DRAIN	PIN 1. SDURCE 1
2. ANODE	2. DRAIN	2. GATE 1
3. CATHODE	3. GATE	3. DRAIN 2
4. CATHODE	4. SDURCE	4. SDURCE 2
5. ANODE	5. DRAIN	5. GATE 2
6. CATHODE	6. DRAIN	6. DRAIN 1
STYLE 10: PIN 1. CATHODE 1 2. N/C 3. CATHODE 2 4. ANODE 2 5. N/C 6. ANODE 1	STYLE 11: PIN 1. EMITTER 2 2. BASE 2 3. COLLECTOR 1 4. EMITTER 1 5. BASE 1 6. COLLECTOR 2	

6. COLLECTOR 2

DATE 26 JAN 2021

#### GENERIC **MARKING DIAGRAM\***



XX = Specific Device Code

M = Month Code

. = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON11126D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-563, 6 LEAD PA		PAGE 2 OF 2	

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights or the rights of others.

4. ANDDE 2 5. N/C 6. ANDDE 1

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor date sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use a a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor houteds for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

ON Semiconductor Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada Phone: 011 421 33 790 2910 Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative