## **ON Semiconductor**

## Is Now



To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,

## Digital Transistors (BRT) R1 = 4.7 k $\Omega$ , R2 = 4.7 k $\Omega$

# NPN Transistors with Monolithic Bias Resistor Network

This series of digital transistors is designed to replace a single device and its external resistor bias network. The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base–emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

#### **Features**

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### **MAXIMUM RATINGS** $(T_A = 25^{\circ}C)$

Rating	Symbol	Max	Unit
Collector-Base Voltage	$V_{CBO}$	50	Vdc
Collector–Emitter Voltage	$V_{CEO}$	50	Vdc
Collector Current – Continuous	IC	100	mAdc
Input Forward Voltage	V <sub>IN(fwd)</sub>	30	Vdc
Input Reverse Voltage	V <sub>IN(rev)</sub>	10	Vdc


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.




#### ON Semiconductor®

#### www.onsemi.com

#### **PIN CONNECTIONS**



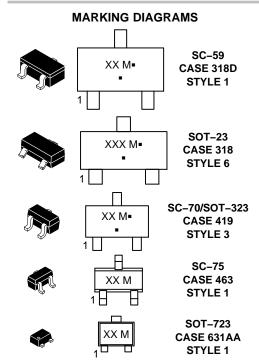

XXX = Specific Device Code

M = Date Code\*

X ML<sub>1</sub>

■ = Pb–Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

#### **ORDERING INFORMATION**

See detailed ordering, marking, and shipping information in the package dimensions section on page 2 of this data sheet.

SOT-1123

CASE 524AA STYLE 1

**Table 1. ORDERING INFORMATION** 

Device	Part Marking	Package	Shipping <sup>†</sup>
MUN2232T1G, SMUN2232T1G*	8J	SC-59 (Pb-Free)	3000 / Tape & Reel
MMUN2232LT1G, NSVMMUN2232LT1G*	A8J	SOT-23 (Pb-Free)	3000 / Tape & Reel
NSVMMUN2232LT3G*	A8J	SOT-23 (Pb-Free)	10000 / Tape & Reel
MUN5232T1G, SMUN5232T1G*	8J	SC-70/SOT-323 (Pb-Free)	3000 / Tape & Reel
DTC143EET1G	8J	SC-75 (Pb-Free)	3000 / Tape & Reel
DTC143EM3T5G	8J	SOT-723 (Pb-Free)	8000 / Tape & Reel
NSBC143EF3T5G	Р	SOT-1123 (Pb-Free)	8000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>\*</sup>S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.




Figure 1. Derating Curve

- (1) SC-75 and SC-70/SOT323; Minimum Pad
- (2) SC-59; Minimum Pad
- (3) SOT-23; Minimum Pad
- (4) SOT-1123; 100 mm<sup>2</sup>, 1 oz. copper trace
- (5) SOT-723; Minimum Pad

**Table 2. THERMAL CHARACTERISTICS** 

	Characteristic	Symbol	Max	Unit
THERMAL CHARACTERISTIC	CS (SC-59) (MUN2232)			
Total Device Dissipation $T_A = 25^{\circ}C \qquad \text{(Note 1)}$ $\text{(Note 2)}$ Derate above 25°C $\text{(Note 2)}$	(Note 1)	P <sub>D</sub>	230 338 1.8 2.7	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ heta JA}$	540 370	°C/W
Thermal Resistance, Junction to Lead (Note 2)	(Note 1)	$R_{ heta JL}$	264 287	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTIC	CS (SOT-23) (MMUN2232L)			
$ \begin{aligned} & \text{Total Device Dissipation} \\ & T_{\text{A}} = 25^{\circ}\text{C} \qquad \text{(Note 1)} \\ & \text{(Note 2)} \\ & \text{Derate above 25}^{\circ}\text{C} \\ & \text{(Note 2)} \end{aligned} $	(Note 1)	P <sub>D</sub>	246 400 2.0 3.2	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ hetaJA}$	508 311	°C/W
Thermal Resistance, Junction to Lead (Note 2)	(Note 1)	$R_{ heta JL}$	174 208	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTIC	CS (SC-70/SOT-323) (MUN5232)	·		
Total Device Dissipation $T_A = 25^{\circ}C \qquad \text{(Note 1)}$ $\text{(Note 2)}$ Derate above 25°C $\text{(Note 2)}$	(Note 1)	P <sub>D</sub>	202 310 1.6 2.5	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ heta JA}$	618 403	°C/W
Thermal Resistance, Junction to Lead (Note 2)	(Note 1)	$R_{ heta JL}$	280 332	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTIC	CS (SC-75) (DTC143EE)			
Total Device Dissipation $T_A = 25^{\circ}C \qquad \text{(Note 1)}$ $\text{(Note 2)}$ Derate above 25°C $\text{(Note 2)}$	(Note 1)	P <sub>D</sub>	200 300 1.6 2.4	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ hetaJA}$	600 400	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTIC	CS (SOT-723) (DTC143EM3)	•		
Total Device Dissipation $T_A = 25^{\circ}C \qquad (Note 1)$ $(Note 2)$ Derate above 25°C $(Note 2)$	(Note 1)	P <sub>D</sub>	260 600 2.0 4.8	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ hetaJA}$	480 205	°C/W
Junction and Storage Temper	ature Range	$T_{J}, T_{stg}$	-55 to +150	°C

- 1. FR-4 @ Minimum Pad.

- FR-4 © Millindin Pad.
   FR-4 © 1.0 x 1.0 Inch Pad.
   FR-4 © 100 mm<sup>2</sup>, 1 oz. copper traces, still air.
   FR-4 © 500 mm<sup>2</sup>, 1 oz. copper traces, still air.

**Table 2. THERMAL CHARACTERISTICS** 

Characteristic	Symbol	Max	Unit
THERMAL CHARACTERISTICS (SOT-1123) (NSBC143EF3)			•
Total Device Dissipation $T_A = 25^{\circ}C \qquad \text{(Note 3)}$ $\text{(Note 4)}$ Derate above $25^{\circ}C \qquad \text{(Note 3)}$ $\text{(Note 4)}$	P <sub>D</sub>	254 297 2.0 2.4	mW mW/°C
Thermal Resistance, (Note 3) Junction to Ambient (Note 4)	$R_{ heta JA}$	493 421	°C/W
Thermal Resistance, Junction to Lead (Note 3)	$R_{ heta JL}$	193	°C/W
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

- 1. FR-4 @ Minimum Pad.
- 2. FR-4 @ 1.0 x 1.0 Inch Pad.
- FR-4 @ 100 mm<sup>2</sup>, 1 oz. copper traces, still air.
   FR-4 @ 500 mm<sup>2</sup>, 1 oz. copper traces, still air.

Table 3. FLECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C, unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS	<u>.</u>		-		
Collector–Base Cutoff Current $(V_{CB} = 50 \text{ V}, I_E = 0)$	I <sub>CBO</sub>	_	_	100	nAdc
Collector–Emitter Cutoff Current $(V_{CE} = 50 \text{ V}, I_B = 0)$	I <sub>CEO</sub>	_	_	500	nAdc
Emitter–Base Cutoff Current (V <sub>EB</sub> = 6.0 V, I <sub>C</sub> = 0)	I <sub>EBO</sub>	_	_	1.5	mAdc
Collector–Base Breakdown Voltage (I <sub>C</sub> = 10 μA, I <sub>E</sub> = 0)	V <sub>(BR)</sub> CBO	50	_	-	Vdc
Collector–Emitter Breakdown Voltage (Note 5) (I <sub>C</sub> = 2.0 mA, I <sub>B</sub> = 0)	V <sub>(BR)</sub> CEO	50	_	-	Vdc
ON CHARACTERISTICS	<u>.</u>		-		
DC Current Gain (Note 5) (I <sub>C</sub> = 5.0 mA, V <sub>CE</sub> = 10 V)	h <sub>FE</sub>	15	30	-	
Collector–Emitter Saturation Voltage (Note 5) (I <sub>C</sub> = 10 mA, I <sub>B</sub> = 1.0 mA)	V <sub>CE(sat)</sub>	_	_	0.25	Vdc
Input Voltage (off) (V <sub>CE</sub> = 5.0 V, I <sub>C</sub> = 100 $\mu$ A)	$V_{i(off)}$	_	1.2	0.5	Vdc
Input Voltage (on) $(V_{CE} = 0.3 \text{ V}, I_C = 20 \text{ mA})$	V <sub>i(on)</sub>	2.5	2.0	-	Vdc
Output Voltage (on) (V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 2.5 V, R <sub>L</sub> = 1.0 k $\Omega$ )	V <sub>OL</sub>	_	_	0.2	Vdc
Output Voltage (off) ( $V_{CC} = 5.0 \text{ V}, V_B = 0.25 \text{ V}, R_L = 1.0 \text{ k}\Omega$ )	V <sub>OH</sub>	4.9	-	-	Vdc
Input Resistor	R1	3.3	4.7	6.1	kΩ
Resistor Ratio	R <sub>1</sub> /R <sub>2</sub>	0.8	1.0	1.2	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulsed Condition: Pulse Width = 300 msec, Duty Cycle ≤ 2%.

## TYPICAL CHARACTERISTICS MUN2232, MMUN2232L, MUN5232, DTC143EE, DTC143EM3

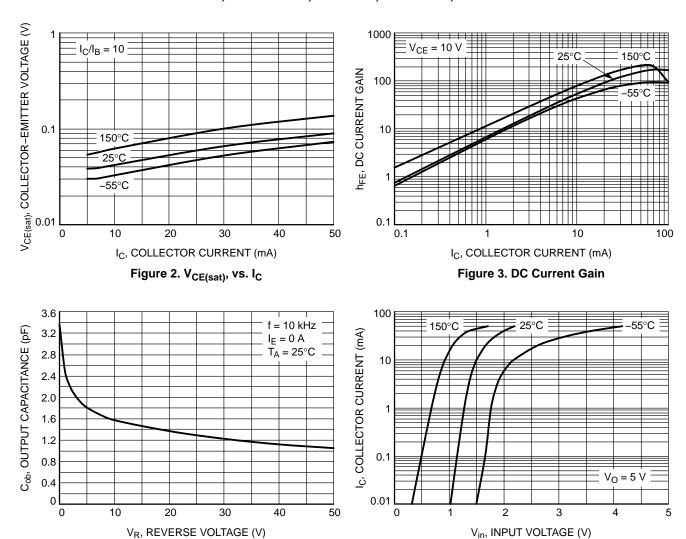


Figure 4. Output Capacitance

Figure 5. Output Current vs. Input Voltage




Figure 6. Input Voltage vs. Output Current

#### **TYPICAL CHARACTERISTICS - NSBC143EF3**

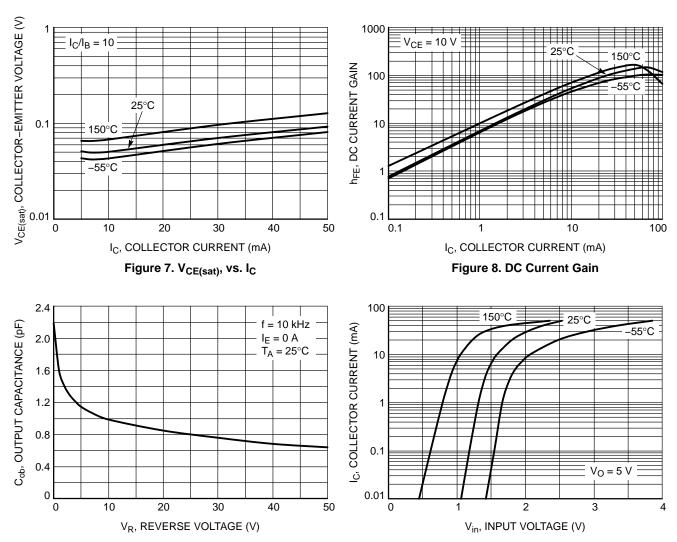


Figure 9. Output Capacitance

Figure 10. Output Current vs. Input Voltage




Figure 11. Input Voltage vs. Output Current



SOT-23 (TO-236) CASE 318-08 **ISSUE AS** 

**DATE 30 JAN 2018** 

# SCALE 4:1 D - 3X b

**TOP VIEW** 







#### **RECOMMENDED SOLDERING FOOTPRINT**



DIMENSIONS: MILLIMETERS

3. ANODE

#### NOTES:

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH.
  MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS				INCHES	
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	0.89	1.00	1.11	0.035	0.039	0.044
A1	0.01	0.06	0.10	0.000	0.002	0.004
b	0.37	0.44	0.50	0.015	0.017	0.020
С	0.08	0.14	0.20	0.003	0.006	0.008
D	2.80	2.90	3.04	0.110	0.114	0.120
E	1.20	1.30	1.40	0.047	0.051	0.055
е	1.78	1.90	2.04	0.070	0.075	0.080
L	0.30	0.43	0.55	0.012	0.017	0.022
L1	0.35	0.54	0.69	0.014	0.021	0.027
HE	2.10	2.40	2.64	0.083	0.094	0.104
Т	O٥		100	O٥		10°

#### **GENERIC MARKING DIAGRAM\***



XXX = Specific Device Code

= Date Code

= Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

STYLE 1 THRU 5: CANCELLED	STYLE 6: PIN 1. BASE 2. EMITTER 3. COLLECTOR	STYLE 7: PIN 1. EMITTER 2. BASE 3. COLLECTOR	STYLE 8: PIN 1. ANODE 2. NO CONNECTION 3. CATHODE	ı	
STYLE 9:	STYLE 10:	STYLE 11:	STYLE 12:	STYLE 13:	STYLE 14:
PIN 1. ANODE	PIN 1. DRAIN	PIN 1. ANODE	PIN 1. CATHODE	PIN 1. SOURCE	PIN 1. CATHODE
2. ANODE	2. SOURCE	2. CATHODE	2. CATHODE	2. DRAIN	2. GATE
3. CATHODE	3. GATE	3. CATHODE-ANODE	3. ANODE	3. GATE	3. ANODE
STYLE 15:	STYLE 16:	STYLE 17:	STYLE 18:	STYLE 19:	STYLE 20:
PIN 1. GATE	PIN 1. ANODE	PIN 1. NO CONNECTION	PIN 1. NO CONNECTION	PIN 1. CATHODE	PIN 1. CATHODE
2. CATHODE	2. CATHODE	2. ANODE	2. CATHODE	2. ANODE	2. ANODE
3. ANODE	3. CATHODE	3. CATHODE	3. ANODE	3. CATHODE-ANODE	3. GATE
STYLE 21:	STYLE 22:	STYLE 23:	STYLE 24:	STYLE 25:	STYLE 26:
PIN 1. GATE	PIN 1. RETURN	PIN 1. ANODE	PIN 1. GATE	PIN 1. ANODE	PIN 1. CATHODE
2. SOURCE	2. OUTPUT	2. ANODE	2. DRAIN	2. CATHODE	2. ANODE
3. DRAIN	3. INPUT	3. CATHODE	3. SOURCE	3. GATE	3. NO CONNECTION
STYLE 27: PIN 1. CATHODE 2. CATHODE	STYLE 28: PIN 1. ANODE 2. ANODE				

DOCUMENT NUMBER:	98ASB42226B	Electronic versions are uncontrolled except when accessed directly from the Document Repos Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-23 (TO-236)		PAGE 1 OF 1	

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

3. CATHODE



SCALE 2:1

SC-59 CASE 318D-04 ISSUE H

**DATE 28 JUN 2012** 

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: MILLIMETER.

	MILLIMETERS			MILLIMETERS			INCHES	
DIM	MIN	NOM	MAX	MIN	MOM	MAX		
Α	1.00	1.15	1.30	0.039	0.045	0.051		
A1	0.01	0.06	0.10	0.001	0.002	0.004		
b	0.35	0.43	0.50	0.014	0.017	0.020		
С	0.09	0.14	0.18	0.003	0.005	0.007		
D	2.70	2.90	3.10	0.106	0.114	0.122		
E	1.30	1.50	1.70	0.051	0.059	0.067		
е	1.70	1.90	2.10	0.067	0.075	0.083		
L	0.20	0.40	0.60	0.008	0.016	0.024		
HE	2.50	2.80	3.00	0.099	0.110	0.118		

#### **GENERIC MARKING DIAGRAM**



XXX = Specific Device Code

Μ = Date Code = Pb-Free Package\*


(\*Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.




STYLE 4:		STYLE 5:		STYLE 6	:
PIN 1. C	CATHODE	PIN 1.	CATHODE	PIN 1	ANODE
2. N	I.C.	2.	CATHODE	2	CATHODE
3. A	NODE	3.	ANODE	3	ANODE/CATHODE

# Ε ΗE



#### **SOLDERING FOOTPRINT\***

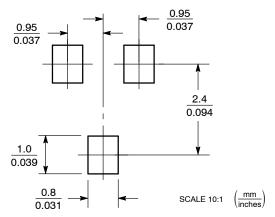

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


DOCUMENT NUMBER: 98ASB42664B Electronic versions are uncontrolled except when accessed directly from the Document Reprinted versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			, ,
DESCRIPTION:	SC-59	•	PAGE 1 OF 1


ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.




SC-70 (SOT-323) CASE 419-04 ISSUE N


**DATE 11 NOV 2008** 







#### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
   CONTROLLING DIMENSION: INCH.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	MOM	MAX
Α	0.80	0.90	1.00	0.032	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2		0.70 REF			0.028 REF	
b	0.30	0.35	0.40	0.012	0.014	0.016
С	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.10	2.20	0.071	0.083	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
е	1.20	1.30	1.40	0.047	0.051	0.055
e1	0.65 BSC		0.026 BSC		;	
Ĺ	0.20	0.38	0.56	0.008	0.015	0.022
HE	2.00	2.10	2.40	0.079	0.083	0.095

#### **GENERIC MARKING DIAGRAM**



XX = Specific Device Code

Μ = Date Code

= Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

STYLE 1: CANCELLED	STYLE 2: PIN 1. ANODE 2. N.C. 3. CATHODE	STYLE 3: PIN 1. BASE 2. EMITTER 3. COLLECTOR	STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE	STYLE 5: PIN 1. ANODE 2. ANODE 3. CATHODE	
STYLE 6: PIN 1. EMITTER 2. BASE	STYLE 7: PIN 1. BASE 2. EMITTER	STYLE 8: PIN 1. GATE 2. SOURCE	STYLE 9: PIN 1. ANODE 2. CATHODE	STYLE 10: PIN 1. CATHODE 2. ANODE	STYLE 11: PIN 1. CATHODE 2. CATHODE
3. COLLECTOR	3. COLLECTOR	3. DRAIN	3. CATHODE-ANODE	3. ANODE-CATHODE	3. CATHODE

DOCUMENT NUMBER:	98ASB42819B	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SC-70 (SOT-323)		PAGE 1 OF 1	

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

## **MECHANICAL CASE OUTLINE**





SC-75/SOT-416 CASE 463-01 **ISSUE G** 

**DATE 07 AUG 2015** 





STYLE 1: PIN 1. BASE 2. EMITTER

3. COLLECTOR

STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE STYLE 5: PIN 1. GATE 2. SOURCE 3. DRAIN

STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE

STYLE 3: PIN 1. ANODE 2. ANODE 3. CATHODE

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: MILLIMETER.

-		MILLIMETERS				INCHES	;
L	DIM	MIN	NOM	MAX	MIN	NOM	MAX
	Α	0.70	0.80	0.90	0.027	0.031	0.035
L	A1	0.00	0.05	0.10	0.000	0.002	0.004
	b	0.15	0.20	0.30	0.006	0.008	0.012
	С	0.10	0.15	0.25	0.004	0.006	0.010
	D	1.55	1.60	1.65	0.061	0.063	0.065
	Е	0.70	0.80	0.90	0.027	0.031	0.035
	е	1	.00 BSC	)		0.04 BSC	)
	L	0.10	0.15	0.20	0.004	0.006	0.008
	HE	1.50	1.60	1.70	0.060	0.063	0.067

#### **GENERIC MARKING DIAGRAM\***



XX= Specific Device Code

Μ = Date Code

= Pb-Free Package

#### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98ASB15184C	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SC-75/SOT-416		PAGE 1 OF 1	

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.







SOT-1123 CASE 524AA ISSUE C

**DATE 29 NOV 2011** 

#### SCALE 8:1





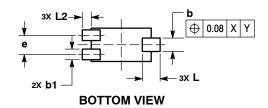

#### **SOLDERING FOOTPRINT\***



STVI F 2

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### NOTES:

- NOTES:

  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.

  2. CONTROLLING DIMENSION: MILLIMETERS.
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE
- MINIMUM THICKNESS OF BASE MATERIAL.
  DIMENSIONS D AND E DO NOT INCLUDE MOLD
  FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS			
DIM	MIN MAX			
Α	0.34	0.40		
b	0.15	0.28		
b1	0.10	0.20		
c	0.07	0.17		
D	0.75	0.85		
Е	0.55	0.65		
Φ	0.35	0.40		
HE	0.95	1.05		
L	0.185 REF			
L2	0.05 0.15			

#### **GENERIC MARKING DIAGRAM\***



= Specific Device Code Μ = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking.

Pb-Free indicator, "G" or microdot " ■", may or may not be present.

PIN 1. BASE	PIN 1. ANODE	PIN 1. ANODE	PIN 1. CATHODE	PIN 1. GATE
<ol><li>EMITTER</li></ol>	2. N/C	2. ANODE	<ol><li>CATHODE</li></ol>	<ol><li>SOURCE</li></ol>
<ol><li>COLLECTOR</li></ol>	<ol><li>CATHODE</li></ol>	<ol><li>CATHODE</li></ol>	<ol><li>ANODE</li></ol>	<ol><li>DRAIN</li></ol>

STVLE 3

DOCUMENT NUMBER:	98AON23134D	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-1123, 3-LEAD, 1.0X0	.6X0.37, 0.35P	PAGE 1 OF 1	

STVLE 5

STVLE 4:

ON Semiconductor and unare trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

STVI F 1:



SOT-723 CASE 631AA-01 ISSUE D

**DATE 10 AUG 2009** 

#### NOTES:

- NOTES.

  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.

  2. CONTROLLING DIMENSION: MILLIMETERS.

  3. MAXIMUM LEAD THICKNESS INCLUDES LEAD
- FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

	MILLIMETERS					
DIM	MIN	MIN NOM MAX				
Α	0.45	0.50	0.55			
b	0.15	0.21	0.27			
b1	0.25	0.31	0.37			
С	0.07	0.12	0.17			
D	1.15	1.20	1.25			
E	0.75	0.80	0.85			
е	0.40 BSC					
ΗE	1.15	1.20	1.25			
L	0.29 REF					
L2	0.15	0.20	0.25			

## **GENERIC** MARKING DIAGRAM\*




= Specific Device Code XX Μ = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G", may or not be present.

# -X-2X b ⊕ 0.08 X Y **TOP VIEW**






STYLE 1: PIN 1. BASE 2. EMITTER 3. COLLECTOR STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE STYLE 3: PIN 1. ANODE 2. ANODE 3. CATHODE

STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE STYLE 5: PIN 1. GATE 2. SOURCE 3. DRAIN

**RECOMMENDED SOLDERING FOOTPRINT\*** 



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON12989D	Electronic versions are uncontrolled except when accessed directly from the Document Repositor, Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-723		PAGE 1 OF 1	

ON Semiconductor and un are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative